



S21 TRANS LOG MAG.
0.000 dB 0.200 dB/DIU

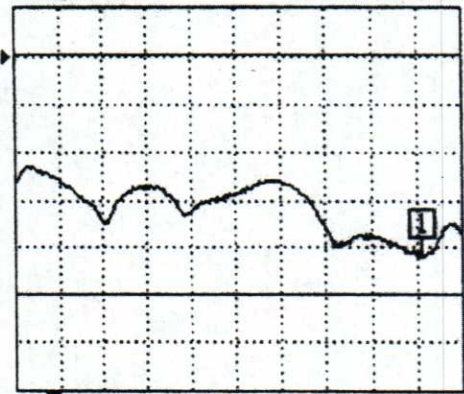

4.00000000 GHz 12.00000000

S22 REFL LOG MAG.
0.000 dB 5.000 dB/DIU

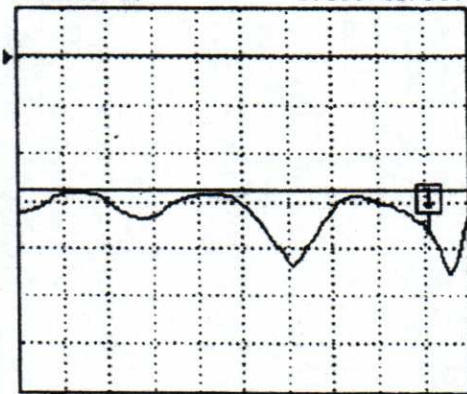


4.00000000 GHz 12.00000000

CH 1 - S21
0.0000 REF
0.000 dB OFFSET
0.00° OFFSET

MARKER 1
11.32000000 GHz
-0.847 dB


MARKER TO MAX
MARKER TO MIN

S11 REFL LOG MAG.
0.000 dB 5.000 dB/DIU

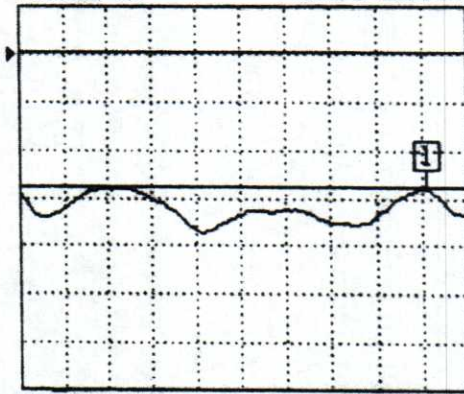

4.00000000 GHz 12.00000000

S12 TRANS LOG MAG.
0.000 dB 5.000 dB/DIU

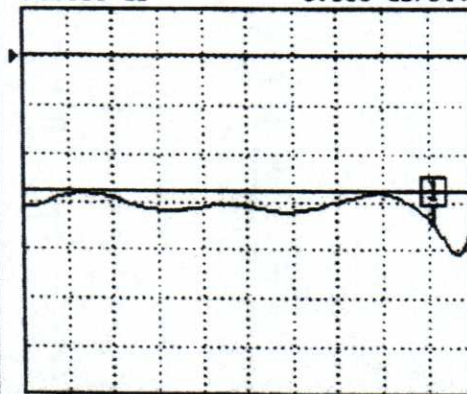

4.00000000 GHz 12.00000000

MARKER READOUT
FUNCTIONS

D3C4012 - Circulator

4.0 - 12.0 GHz

Isolation: 14 dB Min

Insertion loss: 1.0 dB Max

VSWR: 1.50:1 Max

SMA-F connectors all 3 Ports