



TG4040-D Silicone Thermal Putty

Version 1.240919



Silicone Thermal Putty

TG4040-D is an ultra-conformable, one part, high-performance silicone putty. It is designed for when heat transfer is needed between delicate components where the pressure must be minimised. TG-4040D is designed to fill gaps from 0.25 – 8mm with little or no stress generated. The silicone based formulation will adhere to all surfaces, such as metal housings, ceramic and plastic IC packages and FR4 boards to give a low thermal resistance path for heat transfer.

TG-4040-D is available in syringes (90g and 165g) and pots (1kg).

Features

- Smooth surface & low contact resistance
- Usable over a wide temperature range
- Electrical insulation
- High breakdown voltage
- Complies with UL standards

Applications

Electronic components: IC, CPU, MOS, LED, M/B, P/S, Heat Sink, LCD, TV, Notebook, PC, PC Telecom Device, Wireless Hub, etc.
DDR II Module, DVD Applications, Hand-set applications, etc.

Properties


- ✓ REACH Compliant
- ✓ ROHS Compliant

Property	TG4040-D	Unit	Tolerance	Test Method
Colour	Blue	-	±0.3	Visual
Viscosity 0.5rpm	3,000	Pa · s	-	Brookfield
Density	3.2	g/cm ³	-	ASTM D792
Thermal Conductivity	3.0	W/mk	-	ASTM D5470
Volume Resistivity	10 ¹³	Ohm cm ¹	-	ASTM D257
Working Temperature	-50 to 180	°C	-	-

Reliability - Thermal Impedance

Time	Initial	200 Hr	400 Hr	700 Hr	1000 Hr
125°C Aging	0.058	0.059	0.060	0.059	0.060
160°C Aging	0.058	0.059	0.060	0.060	0.0592
85°C/85% RH	0.058	0.59	0.060	0.059	0.060

Operation Manual-Gel Gun

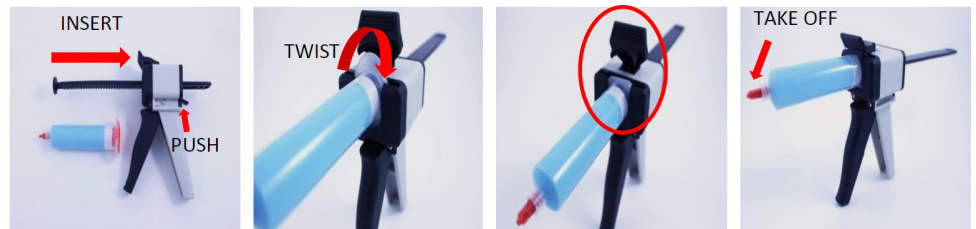

STEP1-Push the latch and insert the stick

STEP 2-Put the tube in and twist

STEP3-Close the cover

STEP4-Take off the plug

* Data for design engineer guidance only. Observed performance varies in application. Engineers are reminded to test the material in application.

T-Global Technology Limited
1 & 2 Cosford Business Park, Central Park,
Lutterworth, Leicestershire LE17 4QU U.K.

Tel: +44 (0)1455 553 510
Email: sales@tglobaltechnology.com
Web: www.tglobaltechnology.com
Skype: tglobal.technology
VAT #: GB 116 662 714

NOTICE: The information contained herein is to the best of our knowledge true and accurate. However, since the varied conditions of potential use are beyond our control, all recommendations or suggestions are presented without guarantee or responsibility on our part and users should make their own test to determine the suitability of our products in any specific situation. This product is sold without warranty either expressed or implied, of fitness for a particular purpose or otherwise, except that this product shall be of standard quality, and except to the extent otherwise stated T-Global Technology Europe and North America's invoice, quotation, or order acknowledgment. We disclaim any and liability incurred in connection with the use of information contained herein, or otherwise. All risks of such are assumed by the user. Furthermore, nothing contained herein shall be construed as a recommendation to use any process or to manufacture or to use any product in conflict with existing future patents covering any product or material or its use.