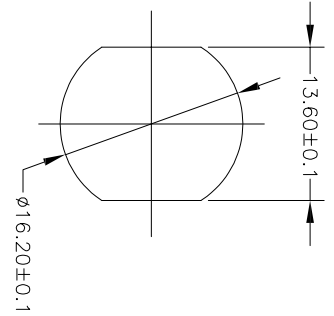
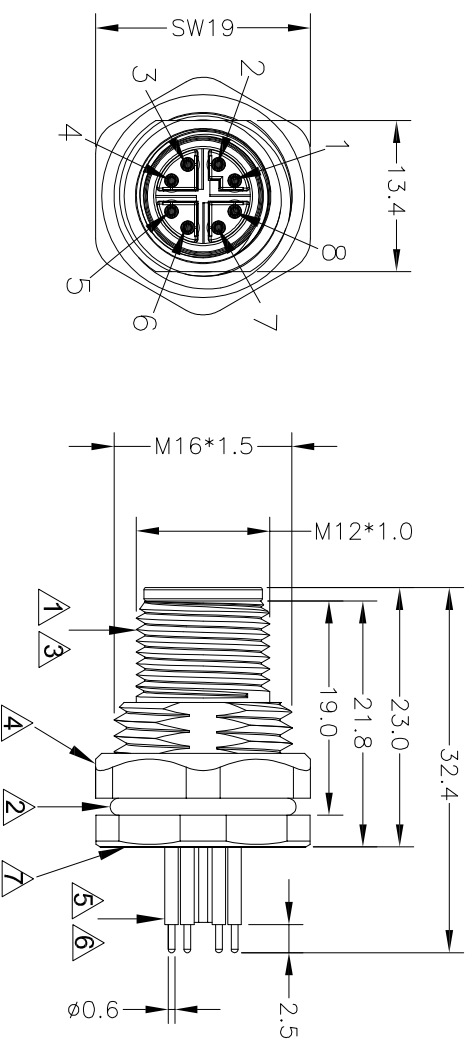


1	2	3	4	5	6	7																																
A																																						
B	<p>RECOMMENDED PANEL CUT-OUT</p> 																																					
C	<p>RECOMMENDED PCB LAYOUT</p> <p>Notes: ② Detailed Product Description: 1. Waterproof connector rating is IP67/IP68 ① 2. Unshielded</p> <p>Electrical Character: 3. Rating Voltage: 48V DC 4. Insulation Resistance: >100MΩ 5. Rating Current: 0.5A 6. Contact Resistance: ≤10mΩ 7. Mating Cycle: 100 times Min, 500 times Max. 8. Operating temperature: -25°C ~ +85°C</p>																																					
D	<table border="1"> <thead> <tr> <th>ITEM</th> <th>DESCRIPTION</th> <th>QTY</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Black AB glue (epoxy resin)</td> <td>2</td> <td>G</td> </tr> <tr> <td>2</td> <td>M12-X 0.6 plate end plated 1u" gold plated L=29.0 mm</td> <td>8</td> <td>PCS</td> </tr> <tr> <td>3</td> <td>M12-X type Nickel plated nickel alloy plug</td> <td>1</td> <td>PCS</td> </tr> <tr> <td>4</td> <td>M16 Brass plated Ni nut L*W=4*19mm</td> <td>1</td> <td>PCS</td> </tr> <tr> <td>5</td> <td>M12-X Male connector UL94V-0 Black</td> <td>1</td> <td>PCS</td> </tr> <tr> <td>6</td> <td>O-Ring Green Ø13.0*Ø2.0mm</td> <td>1</td> <td>PCS</td> </tr> <tr> <td>7</td> <td>M12-X Male front mount shell (M16*15) L=21.8mm</td> <td>1</td> <td>SET</td> </tr> </tbody> </table>						ITEM	DESCRIPTION	QTY	UNIT	1	Black AB glue (epoxy resin)	2	G	2	M12-X 0.6 plate end plated 1u" gold plated L=29.0 mm	8	PCS	3	M12-X type Nickel plated nickel alloy plug	1	PCS	4	M16 Brass plated Ni nut L*W=4*19mm	1	PCS	5	M12-X Male connector UL94V-0 Black	1	PCS	6	O-Ring Green Ø13.0*Ø2.0mm	1	PCS	7	M12-X Male front mount shell (M16*15) L=21.8mm	1	SET
ITEM	DESCRIPTION	QTY	UNIT																																			
1	Black AB glue (epoxy resin)	2	G																																			
2	M12-X 0.6 plate end plated 1u" gold plated L=29.0 mm	8	PCS																																			
3	M12-X type Nickel plated nickel alloy plug	1	PCS																																			
4	M16 Brass plated Ni nut L*W=4*19mm	1	PCS																																			
5	M12-X Male connector UL94V-0 Black	1	PCS																																			
6	O-Ring Green Ø13.0*Ø2.0mm	1	PCS																																			
7	M12-X Male front mount shell (M16*15) L=21.8mm	1	SET																																			
E	<p>RECOMMENDED PCB LAYOUT</p>																																					
F	<p>RECOMMENDED PCB LAYOUT</p>																																					
G	<p>RECOMMENDED PCB LAYOUT</p>																																					
H	<p>RECOMMENDED PCB LAYOUT</p>																																					
1	2	3	4	5	6	7																																
<p>Scale Free</p> <p>TOLERANCE</p> <table border="1"> <tr> <td>.X</td> <td>±0.5</td> </tr> <tr> <td>.XX</td> <td>±0.20</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>X.°</td> <td>±2.0°</td> </tr> <tr> <td>.X°</td> <td>±1.0°</td> </tr> <tr> <td>Angle</td> <td>TOL</td> </tr> </table> <p>① Update the notes</p> <p>② Remove "resistance many oils and chemical" from notes</p> <p>③ Drawn</p>				.X	±0.5	.XX	±0.20	DIM	TOL	X.°	±2.0°	.X°	±1.0°	Angle	TOL	<p>Id.</p> <p>Modification</p> <p>Date</p> <p>Name</p>	<p>Customer-No.</p> <p>ASSMANN WSW-No.</p> <p>A-M12-08-MGMX-GTB3</p> <p>Drawing-No.</p> <p>ASS 8034 CO</p> <p>rev02</p>	<p>Segal</p> <p>Segal</p> <p>Segal</p>																				
.X	±0.5																																					
.XX	±0.20																																					
DIM	TOL																																					
X.°	±2.0°																																					
.X°	±1.0°																																					
Angle	TOL																																					
<p>ASSMANN</p> <p>WSW components</p>				<p>Replace</p> <p>Sheet</p>	<p>H</p>																																	