


ALC80D243CD025

Aliases (A547DF243M025D)

ALC80, Aluminum Electrolytic, 24,000 uF, 20%, 25 VDC, -40/+105°C

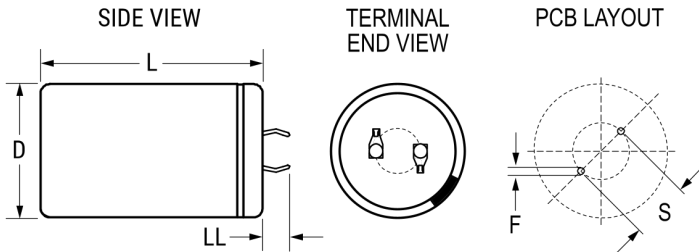

Click [here](#) for the 3D model.

Dimensions

D	30mm +1mm
L	40mm +/-2mm
S	10mm +/-0.1mm
LL	4mm +/-1mm
F	2mm +/-0.1mm

Packaging Specifications

Sleaving	Yes
Packaging	Bulk, Bag

General Information

Series	ALC80
Dielectric	Aluminum Electrolytic
Description	Snap-In, Aluminum Electrolytic
RoHS	Yes
Lead	2 Pin Short
AEC-Q200	No
Halogen Free	Yes
Component Weight	50 g
Notes	Dimensions D And L Include Sleaving.
Shelf Life	156 Weeks

Specifications

Capacitance	24,000 uF
Capacitance Tolerance	20%
Voltage DC	25 VDC, 28.75 VDC (Surge)
Temperature Range	-40/+105°C
Rated Temperature	105°C
Life	7000 Hrs (Rated Voltage And Ripple Current At 105C), 11000 Hrs (Rated Voltage At 105C)
Resistance	48.11 mOhms (100Hz 20C), 41.75 mOhms (10kHz 20C)
Ripple Current	7.235 Amps (100Hz 105C), 9.255 Amps (10kHz 105C)
Leakage Current	1800 uA (5min 20°C)