




IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	72 Ω	160 Ω	330 Ω
Minimum	- Ω	128 Ω	- Ω

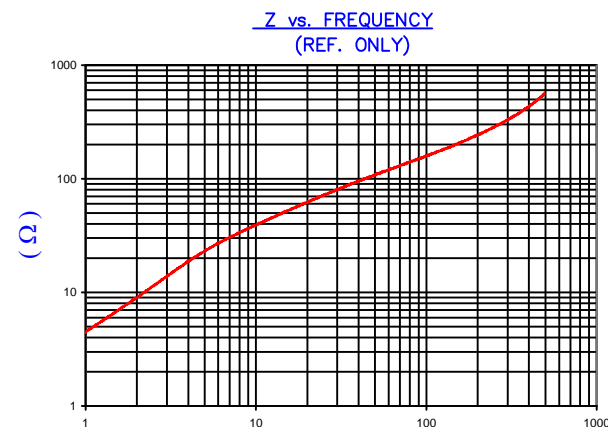

AGILENT E4991A Impedance/Material Analyzer
 HP 16092A Test Fixture, REF # 3671

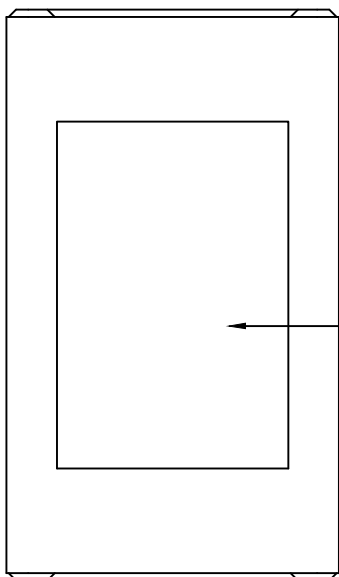

3M F-9473PC
 OR ENGINEER
 APPROVED
 ALTERNATE

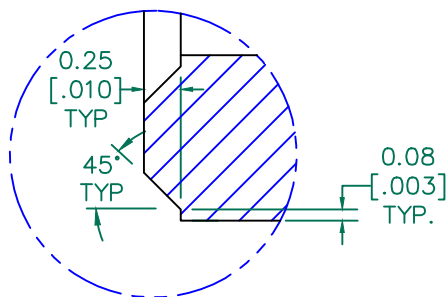

DETAIL "A"
 CHAMFER
 SCALE=20:1


FERRITE CORE DIMENSIONS (SPEC):

A	11.5 [.453]	+0.25 [.010]
B	8.00 [.315]	+0.20 [.008]
C	20.00 [.787]	+0.30 [.012]
D	3.00 [.118]	+0.20 [.008]
E	0.70 [.028]	+0.15 [.006]

WEIGHT/1000 2.75 kgs [6.07 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

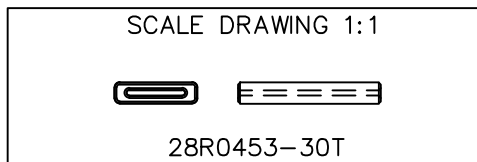

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
C	UPDATE LOGO	08/29/16	QIU	PROJECT/PART NUMBER:	28R0453-30T	REV	C
B	REMOVE LINER TAB	12/03/09	Jcai	PART TYPE:	CNZ RIBBON CORE	DRAWN BY:	JRK
A	ORIGINAL DRAFT	4/22/09	JRK	DATE:	4/22/09	SCALE:	4 : 1
REV	DESCRIPTION	DATE	INT	CAD #	28R0453-30T-C	TOOL #	R0453
						MATERIAL:	
						FERRITE	