

Optolinx FCU-3002A

10/100/1000BaseT to 1000BaseX Media Converter




Features


- ▶ Complies with IEEE 802.3/u/ab 10/100/1000BaseT
- ▶ Complies with IEEE 802.3z 1000BaseX
- ▶ Supports Jumbo Frame (9K bytes)
- ▶ Store-and-Forward Switching Mechanism
- ▶ Auto-Crossover for MDI/MDIX in TP Port
- ▶ Auto-Negotiation in TP Port
- ▶ Supports Flow Control
- ▶ Supports Link Alarm
- ▶ Supports Auto & Force Mode Configuration
- ▶ 5-Year Warranty




▶ Specifications

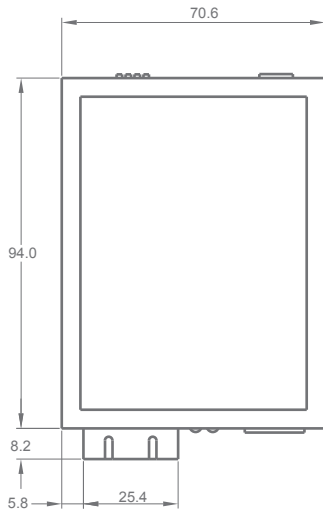


Top View (SC)




Panel View (SC)

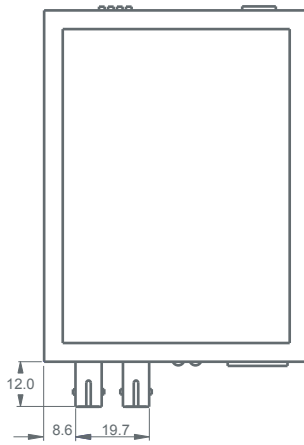


Top View (ST)




Panel View (ST)

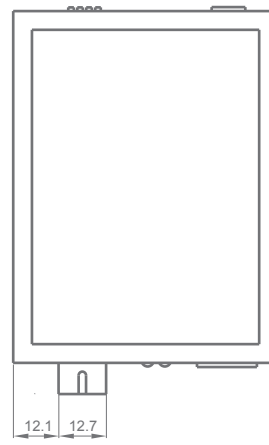

Top View (WDM)



Panel View (WDM)

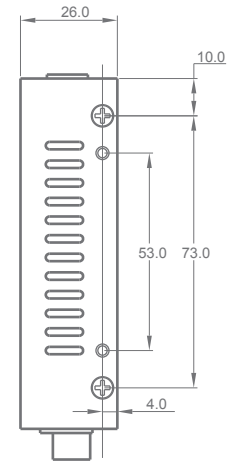

Side View



Rear View

► Specifications

Standard

IEEE 802.3z 1000BaseX
IEEE 802.3 10BaseT
IEEE 802.3u 100BaseTX
IEEE 802.3ab 1000BaseT
IEEE 802.3x Flow Control

Interface

10/100/1000BaseT: 1 x RJ45 Port
1000BaseX: 1 x Port

Wavelength

FCU-3002A-SC: 850nm
FCU-3002A-SC-S1/S2: 1310nm
FCU-3002A-WA: TX-1310nm; RX-1550nm
FCU-3002A-WB: TX-1550nm; RX-1310nm

Typical Distance

FCU-3002A-SC: 550 m
FCU-3002A-SC-S1: 10 Km
FCU-3002A-SC-S2: 20 Km
FCU-3002A-WA/WB-S1: 10 Km
FCU-3002A-WA/WB-S2: 20 Km

Minimum TX Power

FCU-3002A-SC: -9.5 dBm
FCU-3002A-SC-S1: -9.0 dBm
FCU-3002A-SC-S2: -6.0 dBm
FCU-3002A-WA/WB: -9.0 dBm

Maximum TX Power

FCU-3002A-SC: -4.0 dBm
FCU-3002A-SC-S1: -3.0 dBm
FCU-3002A-SC-S2: -1.0 dBm
FCU-3002A-WA/WB: -2.0 dBm

Sensitivity

FCU-3002A-SC: -18.0 dBm
FCU-3002A-SC-S1: -21.0 dBm
FCU-3002A-SC-S2: -21.0 dBm
FCU-3002A-WA/WB: -21.0 dBm

Link Budget

FCU-3002A-SC: 8.5 dB
FCU-3002A-SC-S1: 12.0 dB
FCU-3002A-SC-S2: 15.0 dB
FCU-3002A-WA/WB: 12.0 dB

LED

Power, FDX, Status, Speed, FO Link/ACT, TX Link/ACT

MAC Address Table

1 K

Memory Buffer

128 KB

Forward/Filter Rate

10M: 14,880/14,880pps
100M: 148,800/148,800pps
1000M: 1,488,000/1,488,000pps

Power

External Power Supply: DC 5V, 1.5A
50, 60 Hz

Power Consumption

3 Watts

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 71 x 94 x 26 mm (2.80 x 3.70 x 1.02 inches)
Weight: 0.6 Kg (1.3 lbs)
Installation: DIN-Rail/Wall Mountable

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

| | |
|-----------------|--|
| FCU-3002A-SC | 10/100/1000T - 1000X Media Converter, Standalone Module, Multi-Mode, SC, 550m |
| FCU-3002A-SC-S1 | 10/100/1000T - 1000X Media Converter, Standalone Module, Single-Mode, SC, 10Km |
| FCU-3002A-SC-S2 | 10/100/1000T - 1000X Media Converter, Standalone Module, Single-Mode, SC, 20Km |
| FCU-3002A-WA-S1 | 10/100/1000T - 1000X Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 10Km, TX-1310nm; RX-1550nm |
| FCU-3002A-WB-S1 | 10/100/1000T - 1000X Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 10Km, TX-1550nm; RX-1310nm |
| FCU-3002A-WA-S2 | 10/100/1000T - 1000X Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 20Km, TX-1310nm; RX-1550nm |
| FCU-3002A-WB-S2 | 10/100/1000T - 1000X Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 20Km, TX-1550nm; RX-1310nm |

Optional Accessories

| | |
|--------------|---|
| AD-SCM-STF-M | SC (Male) to ST (Female) Duplex Adapter (Multi-Mode) |
| AD-SCM-STF-S | SC (Male) to ST (Female) Duplex Adapter (Single-Mode) |
| FCU-BK | Mounting Brackets for FCU Modules |
| DIN-RAIL-KIT | DIN-Rail Mounting Kit |

Antaira Technologies

Toll-Free: (877) 229-3665
Phone: (714) 671-9000
FAX: (714) 671-9944

e-Mail: info@antaira.com
Website: <http://www.antaira.com>


www.antaira.com