

# PCM 175/125 XT

---

Sample image

**Order symbol:** PCM 175/125 XT

**Product nbr:** 6016941

**Description:** Enclosure. PC



**Remarks:** Smoked transparent cover

**EAN:** 6418074011862

**El. number:**

- Finland:
- Denmark:
- Sweden:

**Including:** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

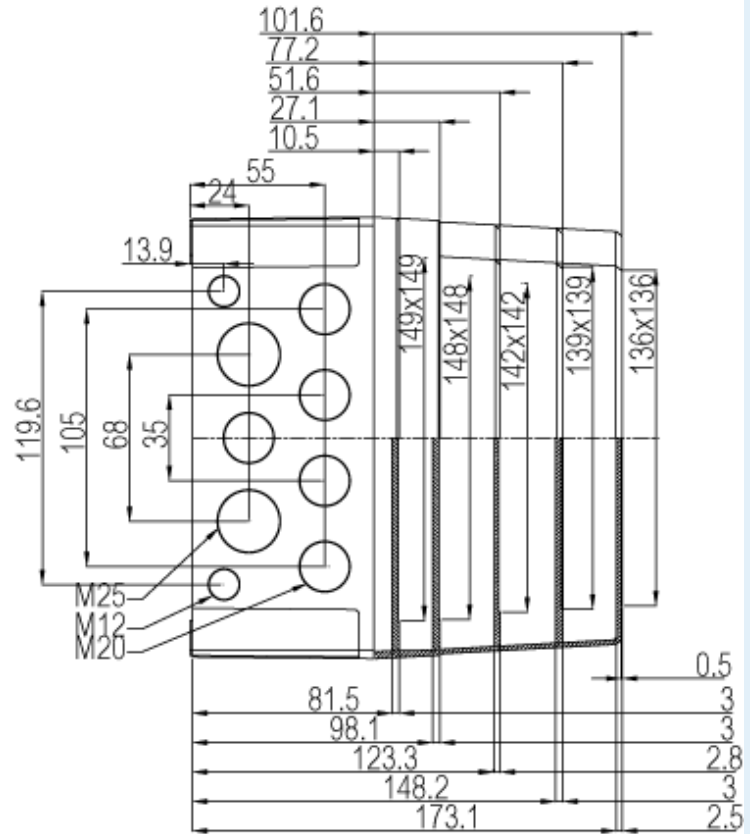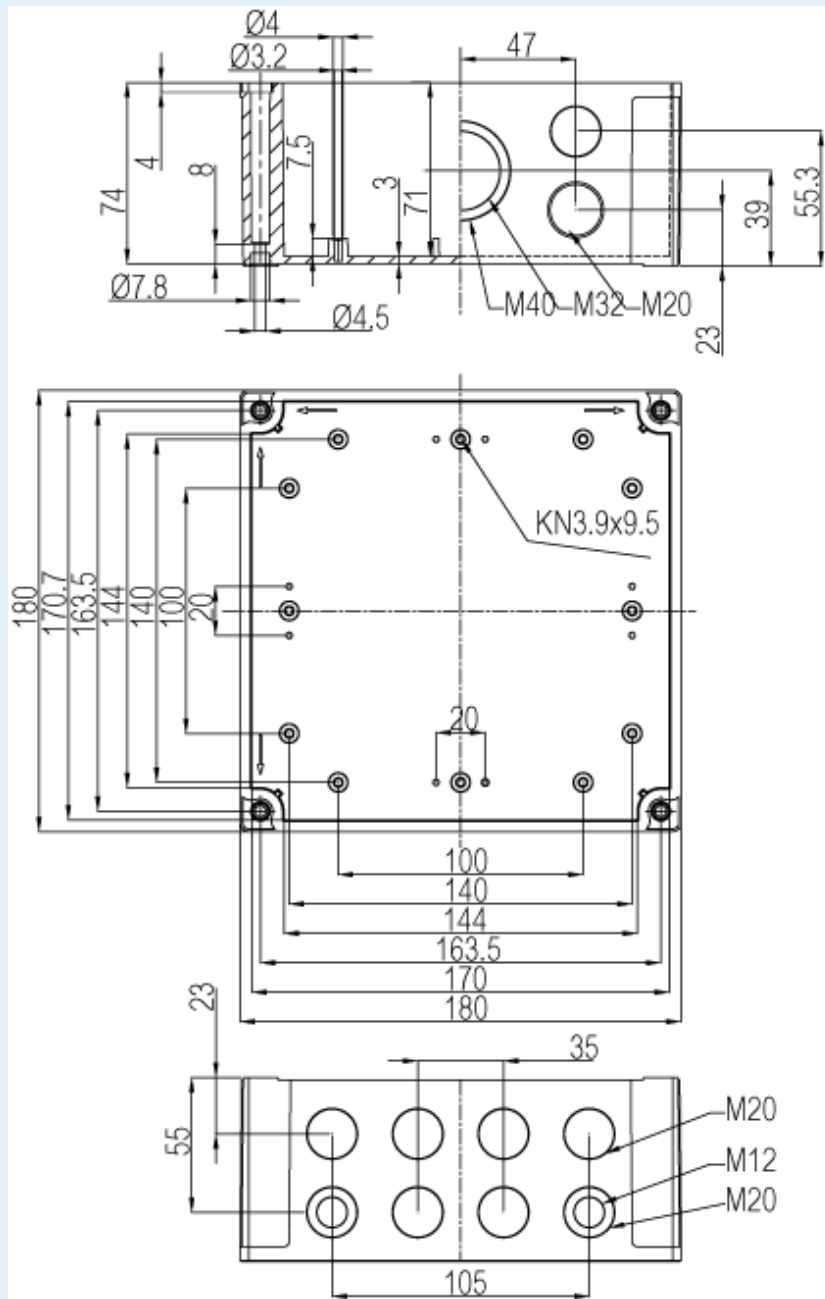

**Dimensions:**      **Height**      **Width**      **Depth**

mm:                      180                      180                      125

inch:

**Materials:**

Material:                      Polycarbonate  
 Base colour:                      RAL 7035 -light grey  
 Cover colour:                      Clear transparent  
 Gasket material:                      Polyurethane

**Temperatures:**

Temperature °C (short term)::                      -40 ... 120  
 Temperature °C (continuous):                      -40 ... 80  
 Temperature °F (short term):                      -40 ... 250

**Accessories:**

MIV 175      Back Panel (Galvanized steel). for enclosures: (148 x 148 x 1)  
 FP A 175/180      Front panel (Aluminum). for enclosures: (170 x 162 x 1)  
 HFP 180      Front panel hinge series  
 MIN 15      DIN-15 Mounting rail. for enclosures: (150 x 15 x 1)  
 MIV 15      DIN-35 Mounting rail. for enclosures: (150 x 35 x 1)  
 FP 22046      Mounting foot kit (4 pcs)

**Rating:**

Ingress protection (EN 60529):                      IP66; IP67;  
 Impact Resistance (EN 62262):                      IK08;  
 Electrical insulation:                      Totally insulated

Temperature °F (continuous): -40 ... 175

Halogen free (DIN/VDE 0472, Part 815): 1

UV resistance: UL 508

Flammability Rating: UL 746C 5"

Glow Wire Test (IEC 695-2-1) °C: 960 °C

NEMA Class

**Certificates:**

Certificate FI 40847