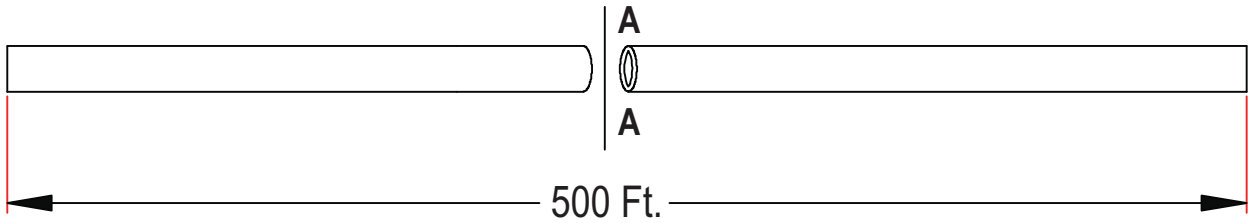


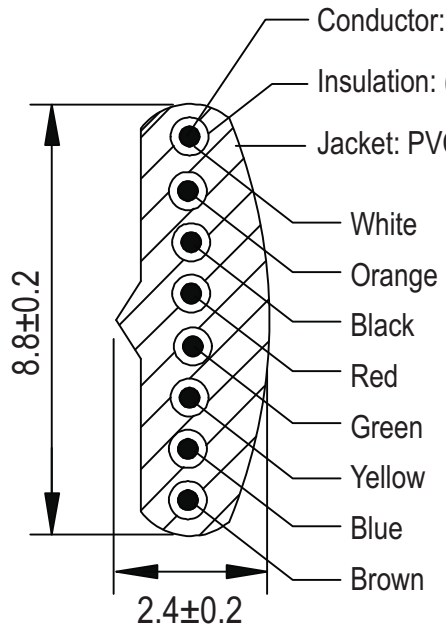


**Sec: A - A**

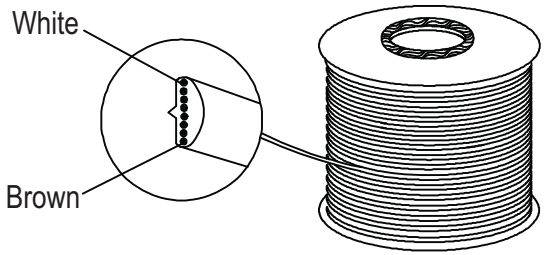


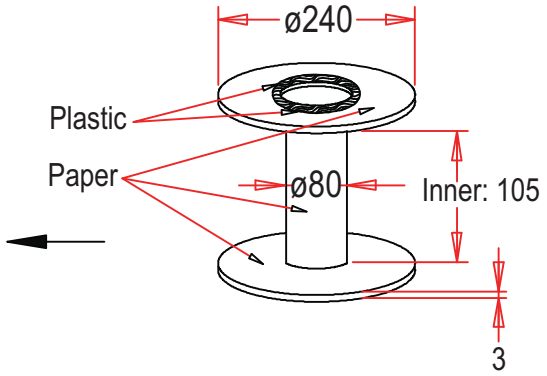


# 500Ft/R. “PE” Foam Wrapped

**Voltage rating: 30V (DC)**

Unit: MM

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Scale | 1:1 | | | | | | Name |
| TOLERANCE | | | | | Drawn | 11.18.11 | Chappell |
| X.X | ±0.40 | | | | Approved | | |
| X.XX | ±0.25 | | | | | | |
| X.XXX | ±0.15 | | | | | | |
| Angle | ±3° | | | | | | |
| | | | Modification | Date | Name | | |

RoHS Complaint

ASSMANN WSW components

**Item No.** AT-K-26-8-W/500-R

**Title** Modular Straight cable - Raw, 8 Contact, 26AWG, White, 500Ft

Drawing No. rev00

Replace | Sheet