


M12 HARAX® A-coded



Mating face



A-coding
Mating face
acc. to IEC 61076-2-101



03

Identification Part No. Drawing Dimensions in mm

HARAX® M12-L, unshielded



Male
3 poles, A-coding,
with pre-leading contact
(assignment 3, 4, 5)

21 03 212 1400

3 poles, A-coding
(assignment 1, 3, 4)

21 03 212 1306


4 poles, A-coding
(assignment 1, 2, 3, 4)

21 03 212 1305

4 poles, A-coding,
to 2.6 mm core diameter
(assignment 1, 2, 3, 4)

21 03 212 1407

0.34 - 0.75 mm²
AWG 22 - 18
Cable diameter: 6 - 8 mm

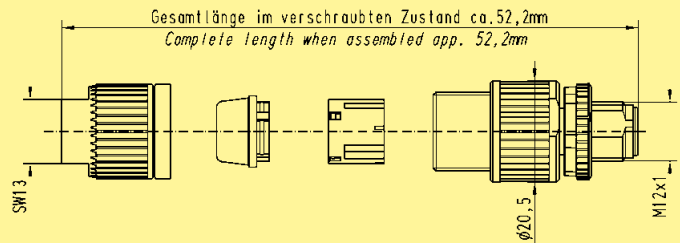


HARAX® M12-L, unshielded



Male
5 poles, A-coding

21 03 272 1505

0.34 - 0.5 mm²
AWG 22 - 20
Cable diameter: 6 - 8 mm

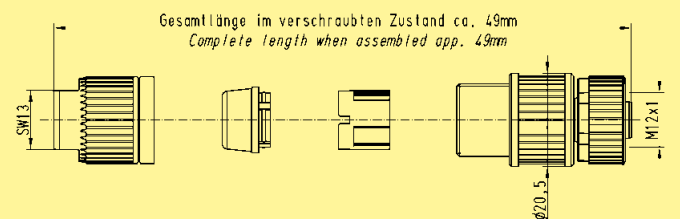

03
12