

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION JAN , 2006.

© COPYRIGHT 2006 By -

ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		ECO-15-004340	30APR2015	RZ	MC

NOTES:

- 1 SINGLE PACKING: ONE CONNECTOR PER LABELED BAG PACKAGED. LABELED PER TEC-107-115
- 2 TRAY PACKAGED
- 3 Ag PLATING
- 4 THIS ITEM MUST BE WHITE

5 ELECTRICAL CHARACTERISTICS



FREQUENCY RANGE: DC - 500 MHz
 NOMINAL IMPEDANCE: Non Constant
 INSULATION RESISTANCE: 5000 MOhm
 WORKING VOLTAGE: 500 Volts RMS at Sea Level
 DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
 CONTACT RESISTANCE:
 CENTER CONTACT: 3.00 mOhm Max
 OUTER CONTACT: 2.00 mOhm Max

6 MECHANICAL CHARACTERISTICS

COUPLING NUT RETENTION FORCE: 445N Min
 CLAMP NUT RECOMMENDED TORQUE: 4 Nm
 CABLE RETENTION FORCE: 128N Min
 DURABILITY: 500 Cycles Min

7 ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE: -65 to +165 DegC

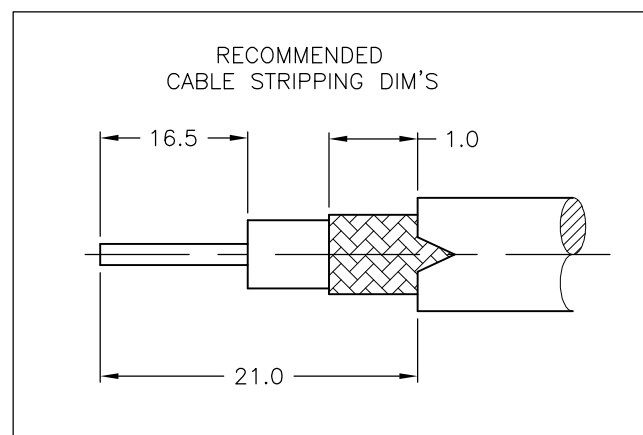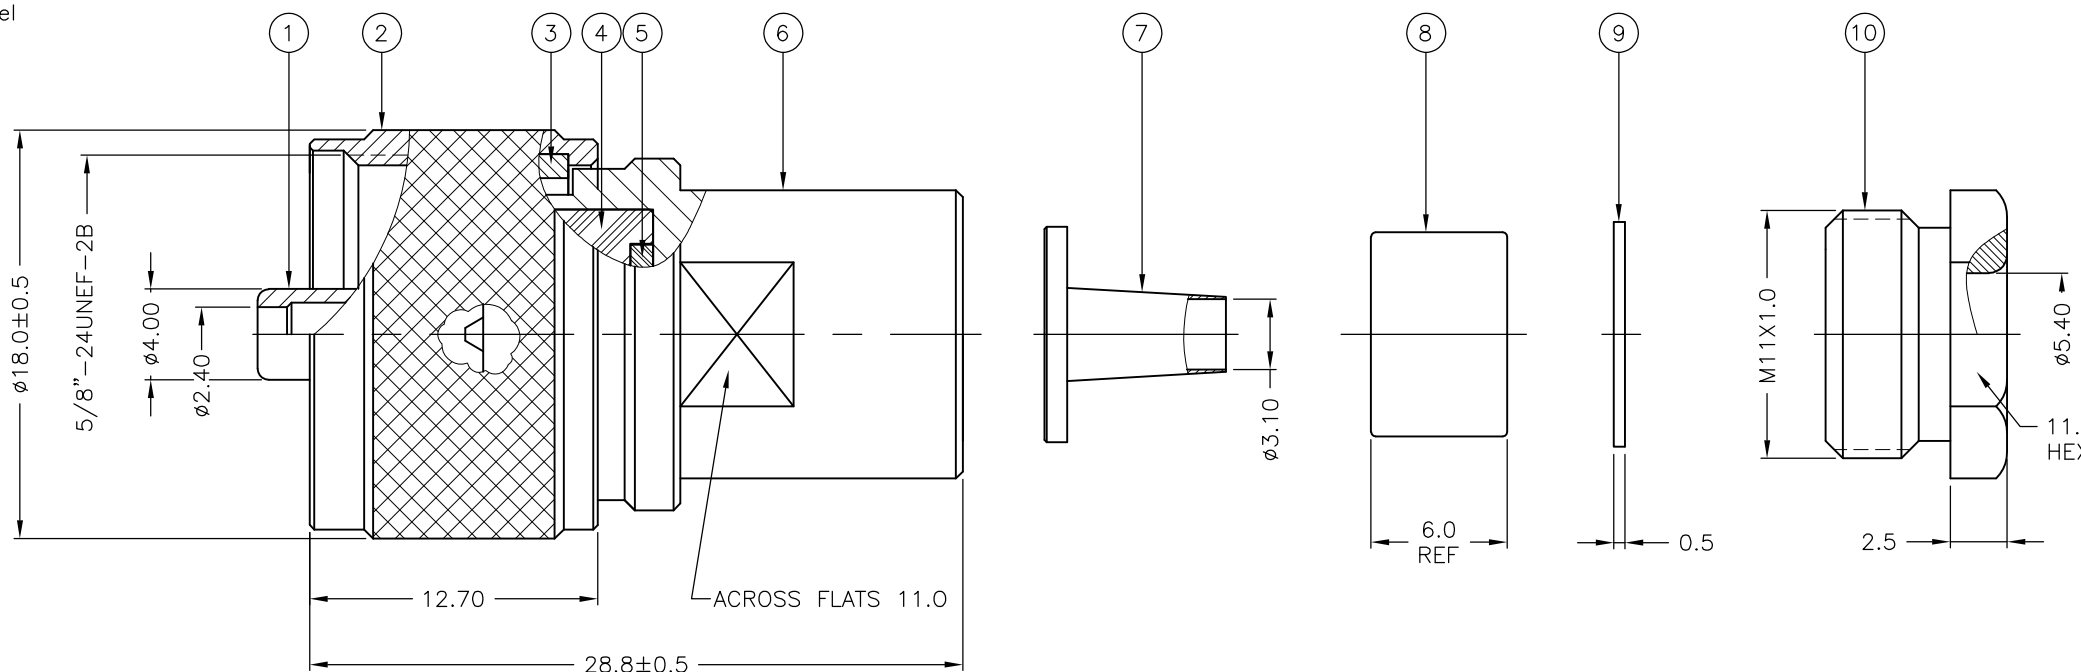

QTY	QTY	MATERIAL	NOTE	DESCRIPTION	ITEM
1	1	BRASS	3	CLAMP NUT	10
1	1	BRASS	3	WASHER	9
1	1	SILICON RUBBER	4	GASKET	8
1	1	BRASS	3	FERRULE	7
1	1	BRASS	3	BODY	6
1	1	PTFE		INSULATION	5
1	1	PTFE		INSULATION	4
1	1	PHOSPHOR BRONZE		CIRCLIP	3
1	1	BRASS	3	COUPLING NUT	2
1	1	BRASS	3	CONTACT	1
6--0	1--0			MATERIAL	DESCRIPTION
				DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	J.SANDWELL	09JAN06	STE TE Connectivity
		CHK	S.PARLOW	09JAN06	
		APVD	F.WHEELER-KING	09JAN06	
		PRODUCT SPEC			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± -		UHF STRAIGHT PLUG SOLDER RG58C/U, 141A/U, URM43, 76, KX15	
		1 PLC ± 0.2			
		2 PLC ± 0.1			
		3 PLC ± -			
		4 PLC ± -			
MATERIAL SEE TABLE		FINISH -		APPLICATION SPEC	
				411-3255	
				WEIGHT -	
				CUSTOMER DRAWING	
				SIZE	RESTRICTED TO
				A3	-
				CAGE CODE	
				00779	
				DRAWING NO	
				C-1337473	
				SCALE	SHEET
				NTS	1 OF 1
				REV	D