

6

5



4

3

2


1

MATERIAL NUMBER	ENGINEERING PART NUMBER	FINISHED LENGTH
1200980199	MP3S62PP4M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200980153	MP3S62PP4M050	16.40' +6.50" -0 [5.0M +165.1 -0]

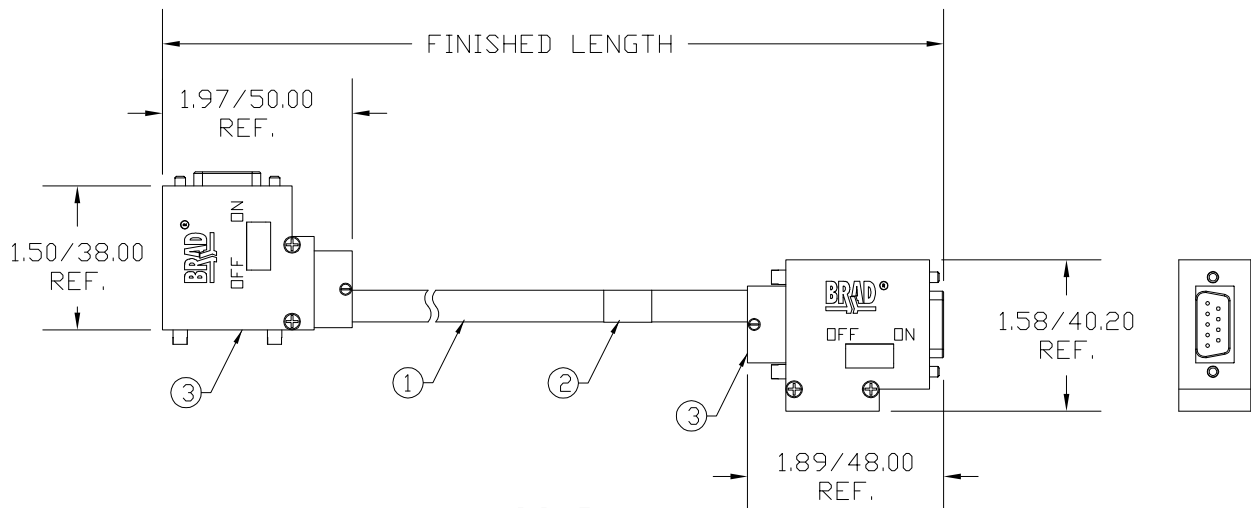

9	NOT CONNECTED	9
8	GREEN (LINE A)	8
7	NOT CONNECTED	7
6	NOT CONNECTED	6
5	NOT CONNECTED	5
4	NOT CONNECTED	4
3	RED (LINE B)	3
2	NOT CONNECTED	2
1	NOT CONNECTED	1

WIRING DIAGRAM



D-SUB FACE VIEW

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE	-20°C TO 80°C

ITEM	COMPONENT	MATERIAL	FINISH
1	CABLE- 22 AWG, COPPER STRANDING TWISTED PAIR SHIELD WITH BRAID	PUR	PURPLE
2	LABEL	MLYAR	BLACK/YELLOW
3	D-SUB	ABS	BLACK

RLSD DRAWING
 EC NO: WNA2010-0143
 DRWN: TWOLDEGE 8/27/09
 CHKD: BWOODMAN
 APPR: JFMURPHY 2009/08/28

QUALITY SYMBOLS
 ▽=0
 ▽=0

DESCRIPTION
 A

	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±.01
1 PLACE	±0.3	±---
ANGULAR ±--°		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
TWOLDEGE	2009/08/26
CHECKED BY	DATE
BWOODMAN	2009/08/26
APPROVED BY	DATE
JFMURPHY	2009/08/27
MATERIAL NO.	
SEE CHART	
SIZE	
A	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
---	----	
TITLE		
MICRO-CHANGE PROFIBUS 9P VERTI-HORIZ DSUB-DSUB PUR CABLE		
MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SD-120098-026	1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6

5

4

3

2

1