


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	H	REVISED PER ECR-13-004343	30JUL13	KH KR

- 1 MATES WITH .032±.001X.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION RANGE .060-.120
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

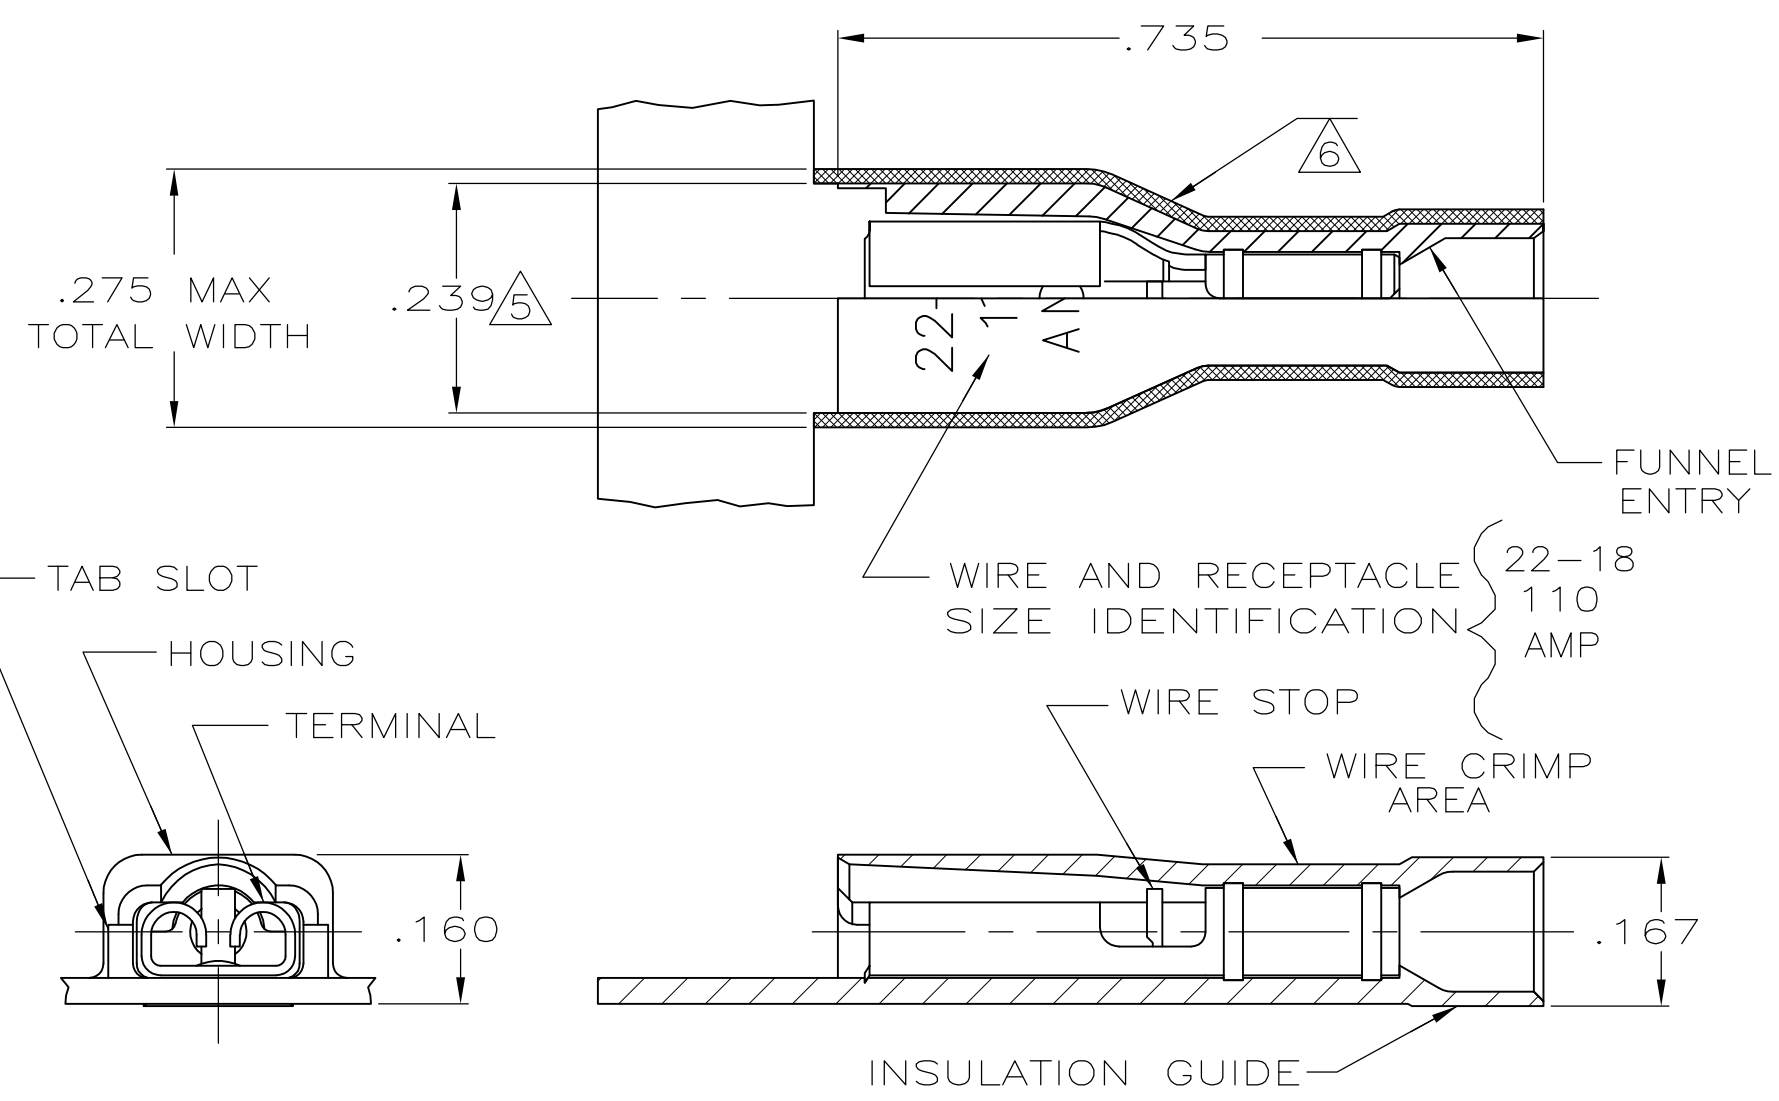

WIRE AND RECEPTACLE SIZE IDENTIFICATION } 22-18
110 AMP

HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: BRASS, TIN	2-520979-2
MATERIAL & FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 10/5/90	TE Connectivity RECEPTACLE ASSEMBLY, ULTRA-FAST PLUS, .110/.125 SERIES, 22-18 AWG				
DIMENSIONS: INCHES		CHK P FORTNEY 10/5/90					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D BRATINA 10/5/90					
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .015 4 PLC ± - ANGLES ± -		NAME					
MATERIAL SEE TABLE		FINISH SEE TABLE	PRODUCT SPEC 108-2044	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			APPLICATION SPEC 114-2123	A3	00779	C-520979	-
			WEIGHT -	CUSTOMER DRAWING			SCALE 5:1
			SHEET 1 OF 1		REV H		