


Binding Post with 4mm Banana Socket


Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire

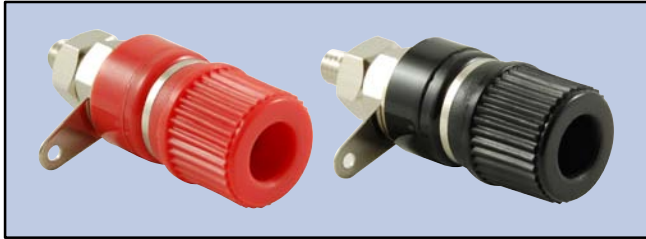

NTE Type No.	Description
81-BP1R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
81-BP1B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.

81-BP1

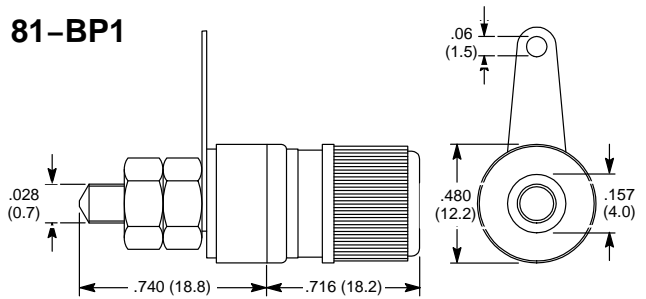

Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .335 (8.5)

Binding Post with 4mm Banana Socket


Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire



NTE Type No.	Description
81-BP2R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
81-BP2B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.

81-BP2

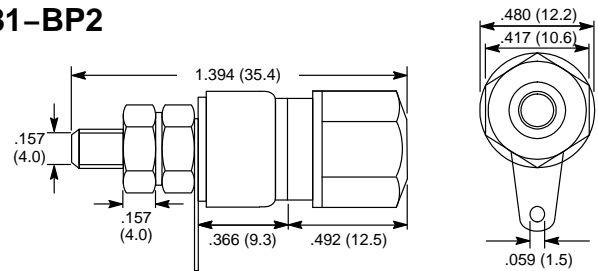


Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .335 (8.5)

Banana Socket 4mm


Features

- Nickel Plated Brass

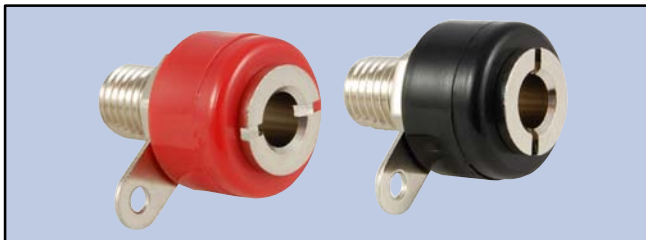

NTE Type No.	Description
81-BP3R	4mm Banana Socket Red 10A with Nickel Plated Brass with Nylon Insulation.
81-BP3B	4mm Banana Socket Black 10A with Nickel Plated Brass with Nylon Insulation.

81-BP3

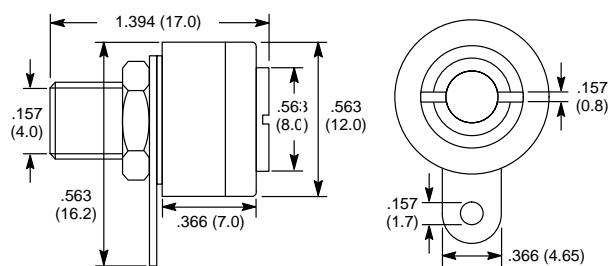


Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .335 (8.5)

Binding Post with 4mm Banana Socket – 2.1mm Cross Hole


Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire

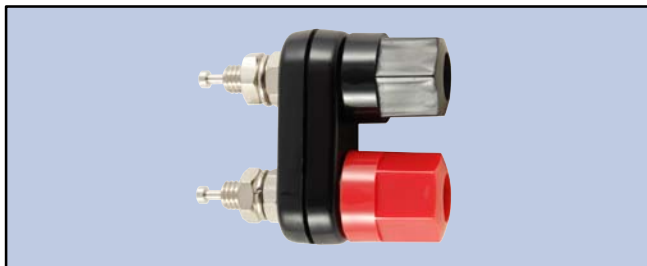

NTE No.	Description
81-BP4BR	Binding Post Dual Black & Red 10A with 4mm Banana Sockets Nickel Plated Brass Nylon Insulation.

81-BP4

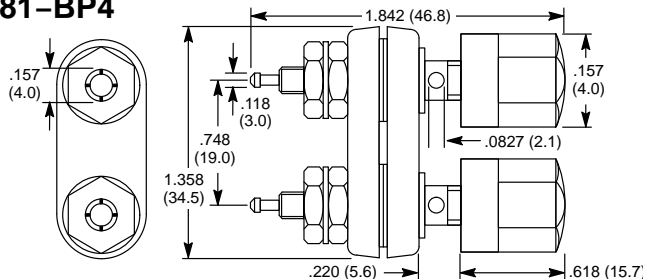


Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -10°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .504 (12.8), 2 Places

Banana Socket 4mm


Features

- Nickel Plated Brass

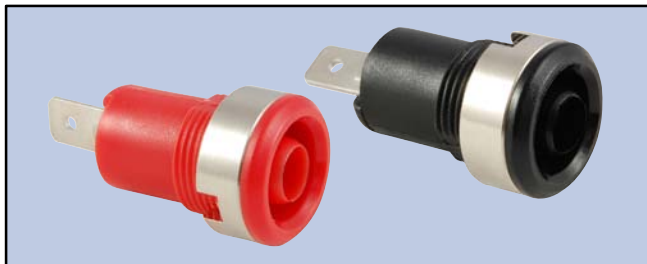

NTE Type No.	Description
81-BS5R	Banana Socket Red 10A Nickel Plated Brass with Nylon Insulation .187 inch QC Terminals.
81-BS5B	Banana Socket Black 10A Nickel Plated Brass with Nylon Insulation .187 inch QC Terminals.

81-BS5

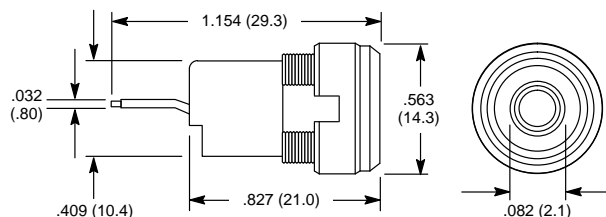

Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .480 (12.2)

Binding Post with 4mm Banana Socket – 2.2mm & 4mm Cross Hole


Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire



NTE No.	Description
81-BP6R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
81-BP6B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.

81-BP6

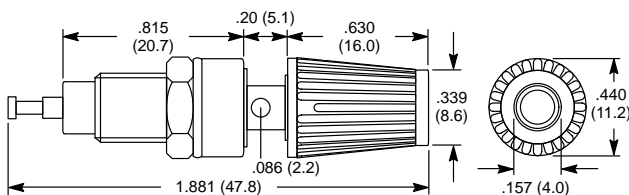


Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1500V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .315 (8.0) x .256 (6.5)

Binding Post with 4mm Banana Socket – 2.2mm & 4mm Cross Hole


Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire

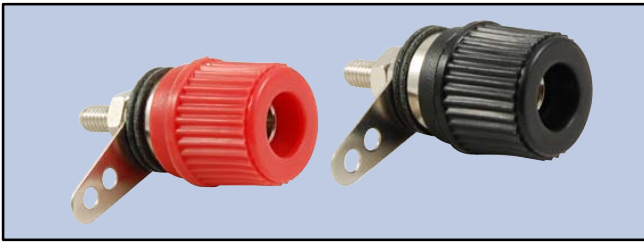

NTE No.	Description
81-BP7R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
81-BP7B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.

81-BP7

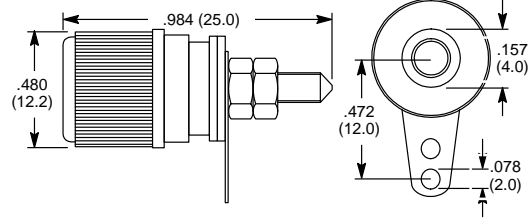

Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 500V 1 minute.
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .126 (3.2)

Binding Post with 4mm Banana Socket – 2.1mm Cross Hole


Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire



NTE No.	Description
81-BP8R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
81-BP8B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.

81-BP8

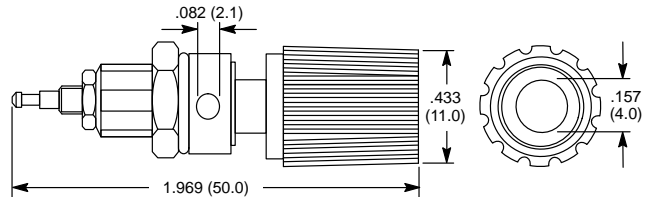

Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: .323 (8.2) x .252 (6.4)

Binding Post with 4mm Banana Socket – 2.2mm & 4mm Cross Hole


Features

- Nickel Plated Brass
- Accepts up to 14 Gauge Wire



NTE No.	Description
81-BP9R	Binding Post Red 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.
81-BP9B	Binding Post Black 10A with 4mm Banana Socket Nickel Plated Brass with Nylon Insulation.

81-BP9

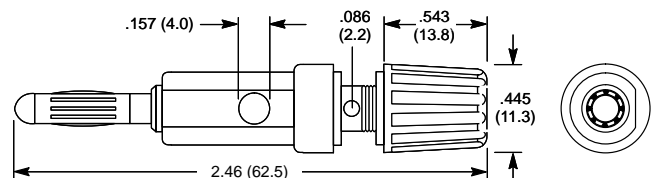


Specifications

Current Rating: 10A
Insulation Resistance: DC500V 100mΩ
Dielectric Strength: AC 1000V 1 minute
Temperature Rating: -20°C to +80°C
Insulation Material: Nylon (UL Flame: 94V-2)
Mounting Hole: N/A


Banana Socket 4mm

Features

- Nickel Plated Brass

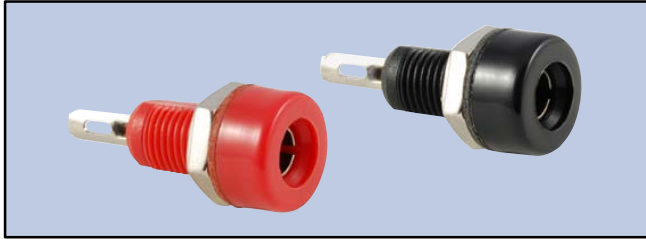

81-BS10

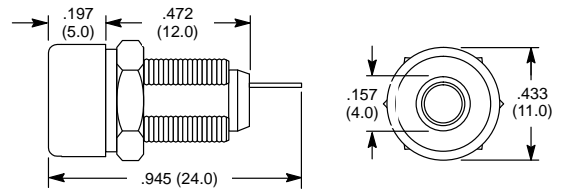

NTE Type No.	Description
81-BS10R	Banana Socket Red10A Nickel Plated Brass with Nylon Insulation Solder Terminals.
81-BS10B	Banana Socket Black10A Nickel Plated Brass with Nylon Insulation Solder Terminals.

Specifications

Current Rating: 10A

Insulation Resistance: DC500V 100mΩ

Dielectric Strength: AC 1000V 1 minute

Temperature Rating: -20°C to +80°C

Insulation Material: Nylon (UL Flame: 94V-2)

Mounting Hole: .323 (8.2) x .244 (6.2)