

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	701070001	SL WtW Conn SR WO/MtgE Opt A 2Ckt	2	PC
C	16020107	SL Male Crp Term 22-24awg Tin Reel	4	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B2	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B1	1X22AWG DISC MPPE BK UL11028	BLACK

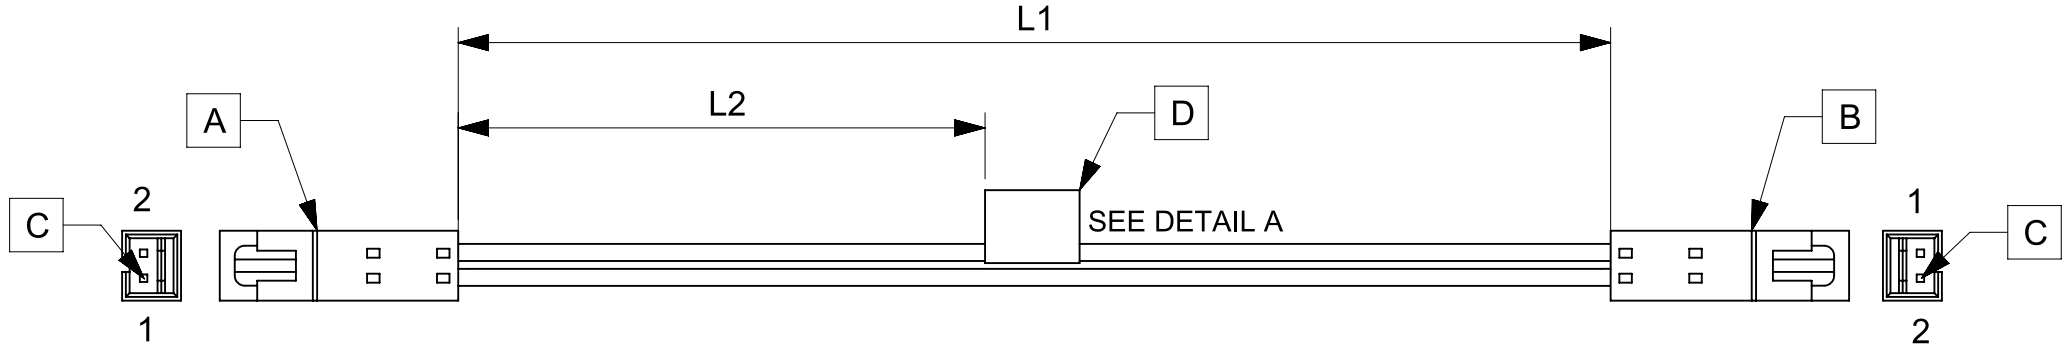


TABLE			
PART NUMBER	L1	L2	TITLE
2162721020	50±3	13 REF	SL POSITIVE LOCK P-P 2CKT 50MM Sn
2162721021	100±5	38 REF	SL POSITIVE LOCK P-P 2CKT 100MM Sn
2162721022	150±8	63 REF	SL POSITIVE LOCK P-P 2CKT 150MM Sn
2162721023	300±10	138 REF	SL POSITIVE LOCK P-P 2CKT 300MM Sn
2162721024	600±10	288 REF	SL POSITIVE LOCK P-P 2CKT 600MM Sn

NOTES

1. Cable assembly must pass 100% continuity and polarity test.
2. Connector view shown is from mating side.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
 MOLEX
 BATCH WK/YR
 DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/05/05	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		 SEE TABLE				
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)						
	mm	NTS	ANGULAR TOL ± °						
	4 PLACES ±		EC NO: 642836						
3 PLACES ±		DRWN: ARAJU 2020/05/05		PRODUCT CUSTOMER DRAWING					
2 PLACES ±		CHK'D: RDESAI01 2020/08/05							
1 PLACE ±		APPR: RDESAI01 2020/08/05							
0 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	2162721020		PSD	000	A
			A4-SIZE	216272	MATERIAL NUMBER	GENERAL MARKET		SHEET NUMBER	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2020/08/05	05:06:36
-----------------	----	--------------	------------	----------