


COIL: @ 25°C
 RESISTANCE _____ 300 OHMS ± 10%
 NOMINAL VOLTAGE _____ 26.5 VDC
 MUST OPERATE _____ 13.0 VDC
 MUST RELEASE _____ 1.8 VDC

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 20 _____ g's
 SHOCK _____ 50 _____ g's _____ 11 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: OPERATE & RELEASE 10 MS MAX.
 OPERATE BOUNCE 2 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

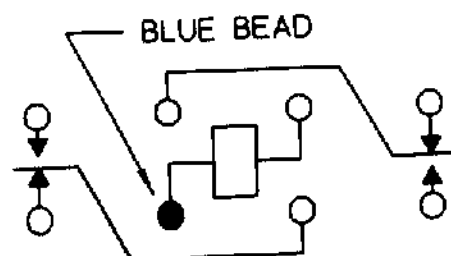

CONTACT RATING: _____ 10 AMPS 28 VDC
 _____ 5 AMPS 115 VAC/400 Hz RESISTIVE
 _____ 100,000 OPERATIONS

DR. R.B. 9/13/94 CK. 9/13/94



CUST. _____
 CUST. NO. _____

TYPE '07' RELAY

B07B035BC1