


# KAM03CT70J105KH Datasheet



(0201 6.3 V X7T 1uF ±10%)

## Dimensions









	millimetres	inches
L	0.6 ± 0.09	0.024 ± 0.004
W	0.3 ± 0.09	0.012 ± 0.004
T max.	0.39	0.015
t	0.18 ± 0.05	0.007 ± 0.002

## Basic Specifications

Item	Unit	Spec.	Conditions
Capacitance	uF	0.9 to 1.1	@ 1 kHz, 0.5 Vrms
DF	%	12.5 max.	@ 1 kHz, 0.5 Vrms
IR	MΩ	50 min.	@ 6.3 Vdc, t = 60 s

Operating Temperature	-55°C to +125°C
Dielectric	X7T
Product Level	AEC-Q200
RoHS Compliant	Yes
Termination	Sn

## Electrical Characteristics

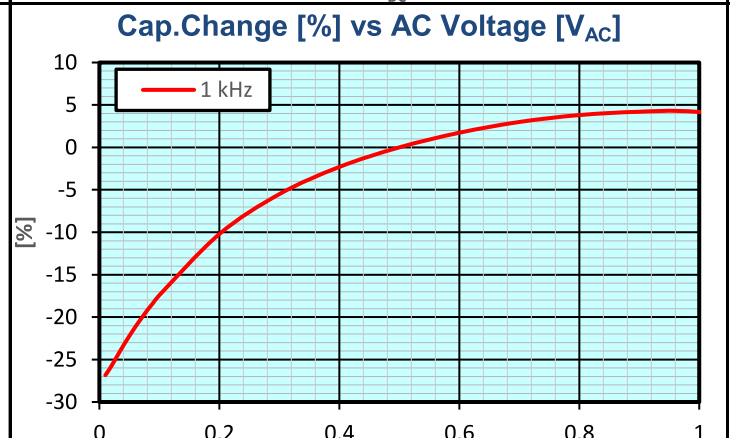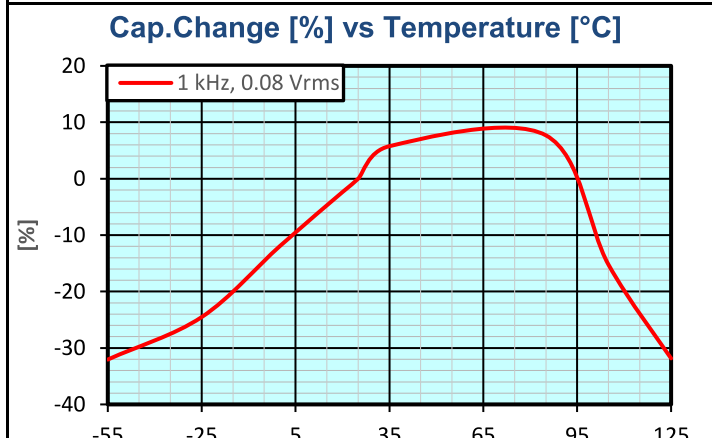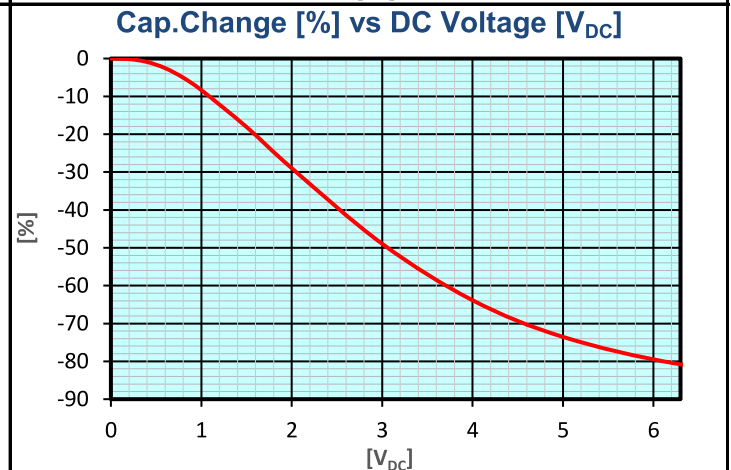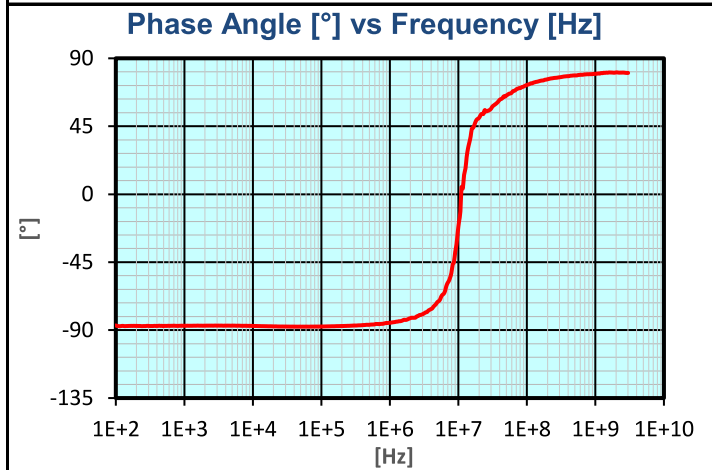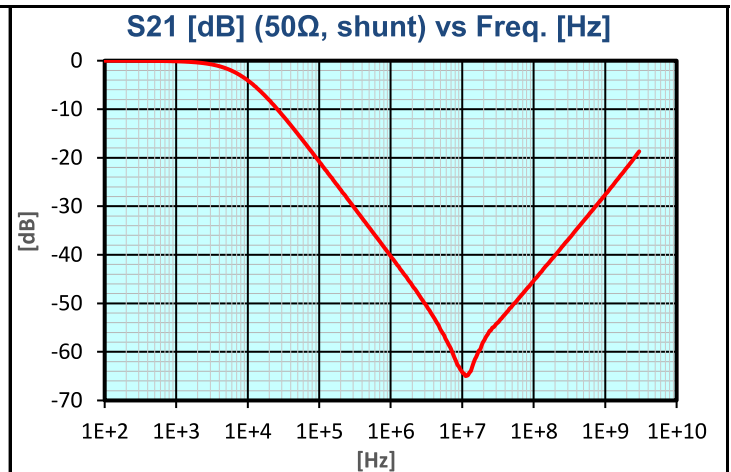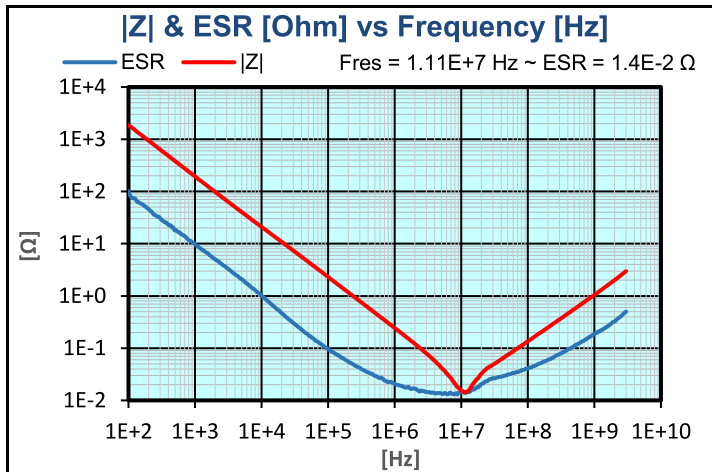


# KAM03CT70J105KH Datasheet



(0201 6.3 V X7T 1uF ±10%)

## Electrical Characteristics

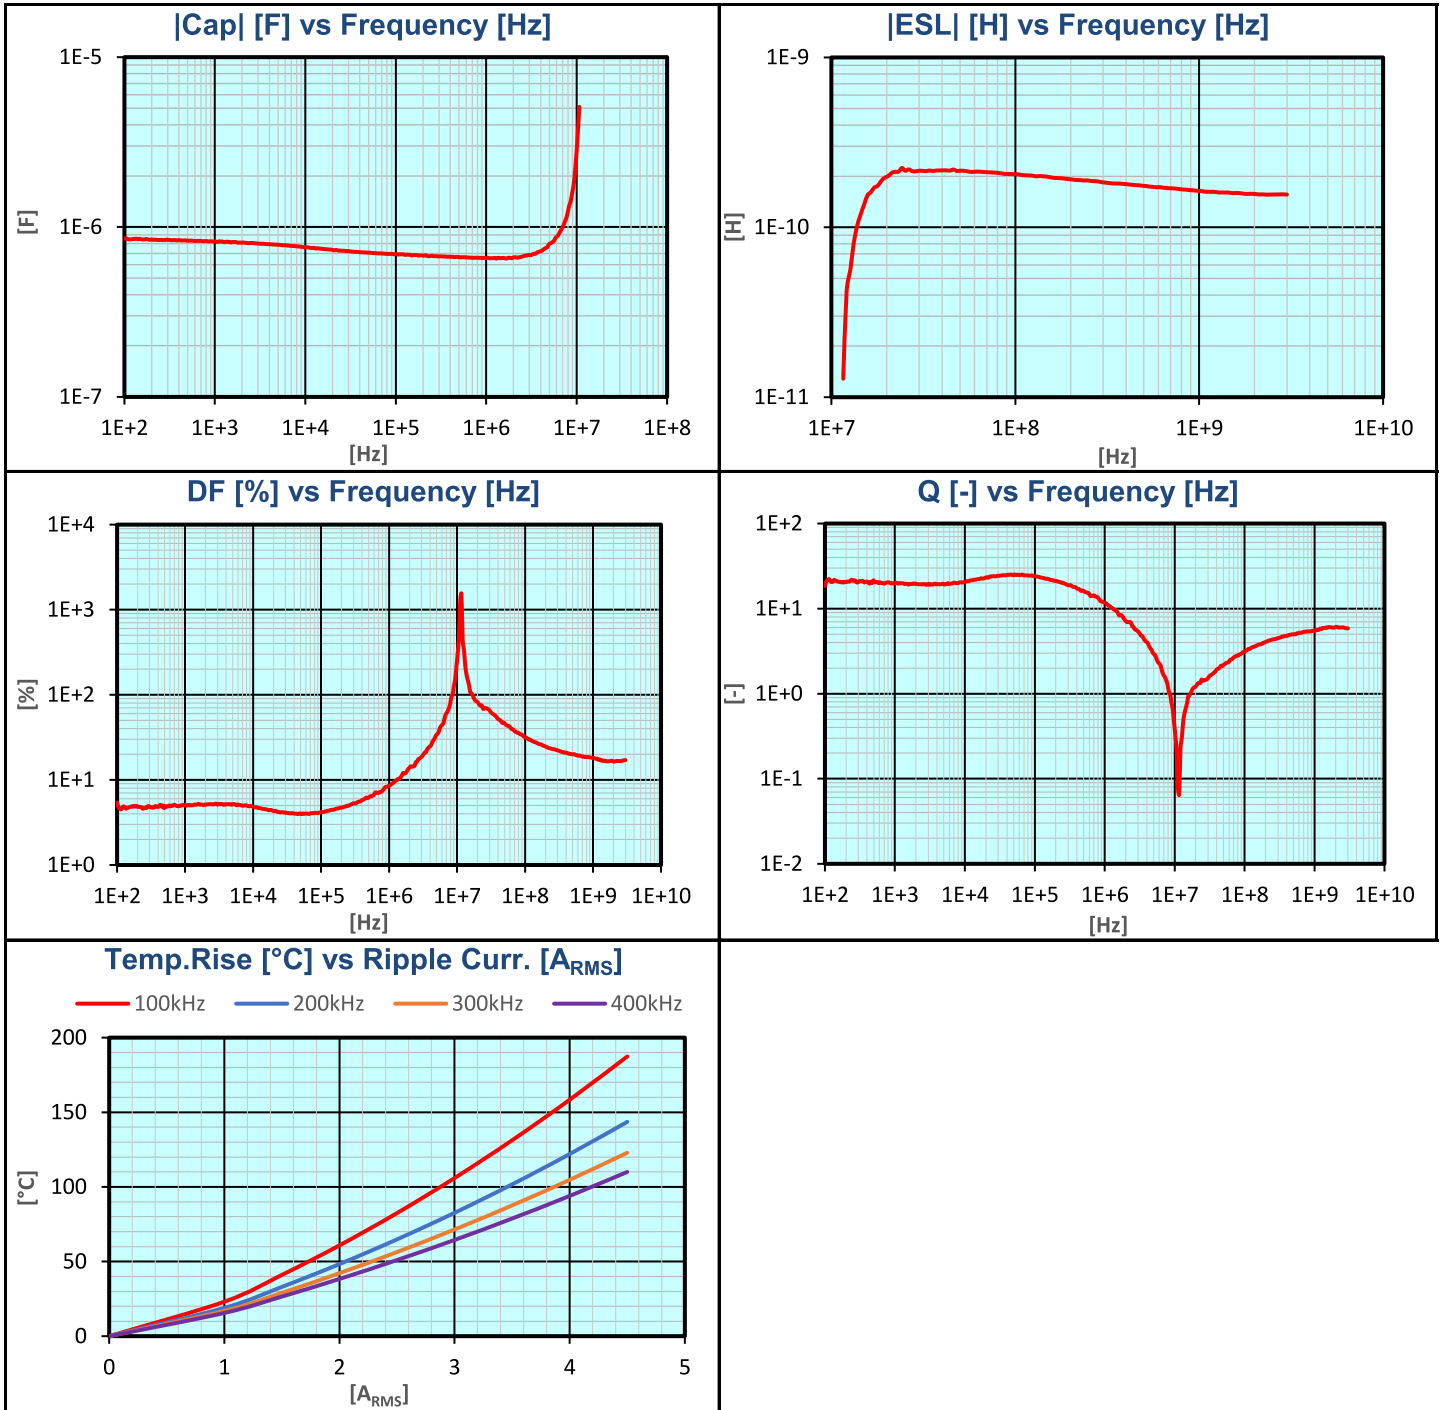

# KAM03CT70J105KH Datasheet



(0201 6.3 V X7T 1uF ±10%)

## Part Number Information

K			G			M			21		C		R5		1E		103		K			T			###		
Symbol:	Product Level:		Requirement:			Size:	EIA:	Thickness:	Dielectric:		Multiplier:	Base:	Capacitance:	Tolerance:			Packing:	Optional:									
KAVX	G	General	M	Standard		02	01005	See catalog	CG	C0G	0	1x	A	1	(2 significant digits + no of zeros)	A	± 0.05 pF	H	} Φ 180 (7 inch)*	} See catalog for optional codes							
	A	Automotive	U	Hi-Q (Special function)		03	0201	for list of codes	R5	X5R	1	10x	N	1.5		B	± 0.1 pF	T									
		(AEC-Q200)	E	ESD (Special function)		05	0402		S6	X6S	2	100x	D	2		C	± 0.25 pF	U									
	M	Medical	L	Low inductance reverse Geometry		15	0603		T6	X6T	3	1000x	E	2.5	<b>Examples:</b>	D	± 0.5 pF	Y									
			A	Low Inductance LGA		21	0805		R7	X7R	U	3			100 = 10 pF	F	± 1 %	V									
			F	Flexiterm (Special function/structure)		31	1206		S7	X7S	V	3.5			102 = 1000 pF	G	± 2 %										
			S	Flexisafe (Special function/structure)		32	1210		T7	X7T	G	4			224 = 220 nF	J	± 5 %	M									
			G	Gold Termination (Special Structure)		42	1808		R8	X8R	H	5			105 = 1 μF	K	± 10 %	L	} Φ 330 (13 inch)*								
			C	IDC (Special structure)		43	1812		L8	X8L	J	6.3				M	± 20 %	N									
			Q	Ultra Low ESR		44	1825		G8	X8G								K									
						55	2220		V5	Y5V								S									
						56	2225												X	Waffle pack							
						91	3640																				

Note:  
\* See catalog for more information.