


Singlemode can support 40GBASE-PLR4 / 100GBASE-PSM4 in applicable parallel optics networks

MTP/MPO (APC) to 4xLC (UPC) Singlemode Breakout Patch Cable, 40/100 GbE, QSFP+ 40GBASE-PLR4, Plenum, Yellow, 1 m (3.3 ft.)

MODEL NUMBER: N390-01M-8LC-AP

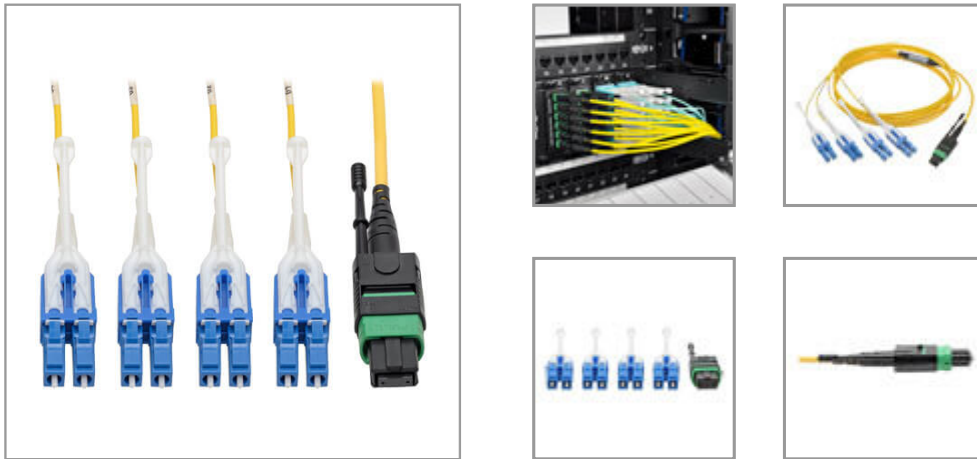

Premium 8.3/125 singlemode fiber optic cabling for transmitting 40/100 Gb data and voice signals. Designed for high-density fiber patching between data center MDFs and IDF's in enterprise installations.

Features

9/125 Rated Singlemode Cable for 40/100 Gb Ethernet Applications

- Designed for high-density fiber patching between data center MDFs and IDF's in enterprise installations
- Optimized for QSFP+ 40GBASE-PLR4 and QSFP28 100GBASE-PSM4 networks
- Plenum-rated jacket suited for ceilings, walls and ducts
- Yellow-colored for identification as a singlemode cable

MTP/MPO APC and LC Duplex UPC Connectors with Push/Pull Tabs

- MTP/MPO female connector and 8 LC duplex male connectors—no splicing required
- 12-fiber MTP/MPO connector 12 times denser than SC connector
- APC connector angled to prevent light from reflecting back into laser
- UPC connector with premium-grade ceramic ferrule for 10 GbE and faster applications
- Push/pull tabs easy to install and remove with one hand

Error-Free Signal Transfer

- Fully transmits 40GBASE-PLR4 with 4 fibers transmitting at 10 Gbps in each direction
- 100% tested for low insertion loss and back reflection
- Slim, space-saving uniboot design easier to manage in crowded applications

Specifications

Highlights

- Push/pull tab connectors install/remove with one hand
- 12-fiber MTP/MPO connectors with 12x density of SC connectors
- Slim space-saving uniboot design for easy cable management
- Angled APC connectors protect laser against destabilization
- Yellow color for quick singlemode identification

Package Includes

- N390-01M-8LC-AP MTP/MPO to 8xLC Singlemode Breakout Patch Cable, Yellow, 1 m



OVERVIEW	
UPC Code	037332205414
Technology	MTP/MPO; Singlemode
PHYSICAL	
Cable Jacket Color	Yellow
Clad Diameter	125 micron
Core Diameter	9 micron
Number of Fibers	12
Cable Length (ft.)	3.3
Cable Length (m)	1
Cable Length (in.)	39.4
Shipping Dimensions (hwd / cm)	22.86 x 17.78 x 1.27
Shipping Dimensions (hwd / in.)	9.00 x 7.00 x 0.50
Shipping Weight (kg)	0.06
Shipping Weight (lbs.)	0.14
ENVIRONMENTAL	
Operating Temperature Range	-4 to 140 F (-20 to 60 C)
Storage Temperature Range	-4 to 140 F (-20 to 60 C)
COMMUNICATIONS	
Network Speed	10Gbps / 40Gbps / 100Gbps
CONNECTIONS	
Side A - Connector 1	12-STRAND MTP (FEMALE)
Side B - Connector 1	(4) LC DUPLEX (MALE) WITH PULL/PUSH TAB
SPECIAL FEATURES	
Push/Pull Tabs	Yes
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty