


PART NUMBER	ENGINEERING NUMBER	FINISHED LENGTH	CABLE JACKET MATERIAL
1201148027	BR\1050-F-2P-10	10M ± 75MM	PUR 3x.75+16x0.34 BK
1201148060	BR\1050-F-2P-05	5M ± 75MM	PUR 3x.75+16x0.34 BK

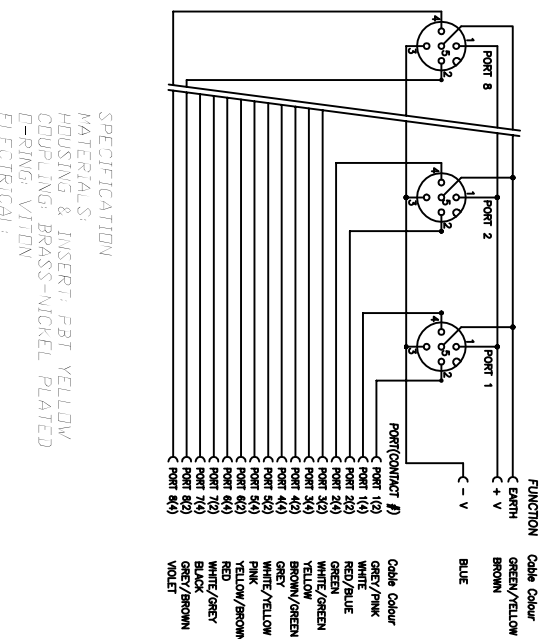

SPECIFICATION
 MATERIALS:
 HOUSING & INSERT: PBT YELLOW
 COUPLING: BRASS-NICKEL PLATED
 O-RING: VITON
 ELECTRICAL:
 VOLTAGE: 10-30V DC
 CURRENT RATING: 4A PER PORT, 12 AMPS MAX.
 PROTECTION CLASS: IP69
 OPERATING TEMPERATURE: -25°C to +50°C

NOTES:
 FIXING HOLES TO SUIT M4 SCREWS

REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
2	DESCRIPTION EC NO: IPG2017-0283 DRWN: BBRAUCH 2016/09/14 CHKD: ULETTENN APPR: -		4 PLACES: ±0.15 mm 3 PLACES: ±0.1 mm 2 PLACES: ±0.08 mm 1 PLACE: ±0.03 mm ANGULAR: ±0.1°	MM ONLY	1:1	METRIC	THIRD ANGLE PROJECTION
DRAWN BY: REISSNER 2010/03/22 CHECKED BY: NS 2010/03/22 APPROVED BY: NSTAUDIG 2010/03/23				DOCUMENT NO.: MOLEX SD-120114-079			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SIZE: A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SEE TABLE				SHEET NO.: 1 OF 1			

A

B

C

D

E

F

A

B

C

D

E

F

10 9 8 7 6 5 4 3 2 1

10 9 8 7 6 5 4 3 2 1