

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	50579403	SL Crp Hsg G SR Pos Ltch 3Ckt Opt G	2	PC
C	16020086	SL Fem Crimp Term 22-24 Tin Reel x	6	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B3	1X22AWG DISC MPPE BK UL11028	BLACK
A2	B2	1X22AWG DISC MPPE BK UL11028	BLACK
A3	B1	1X22AWG DISC MPPE BK UL11028	BLACK

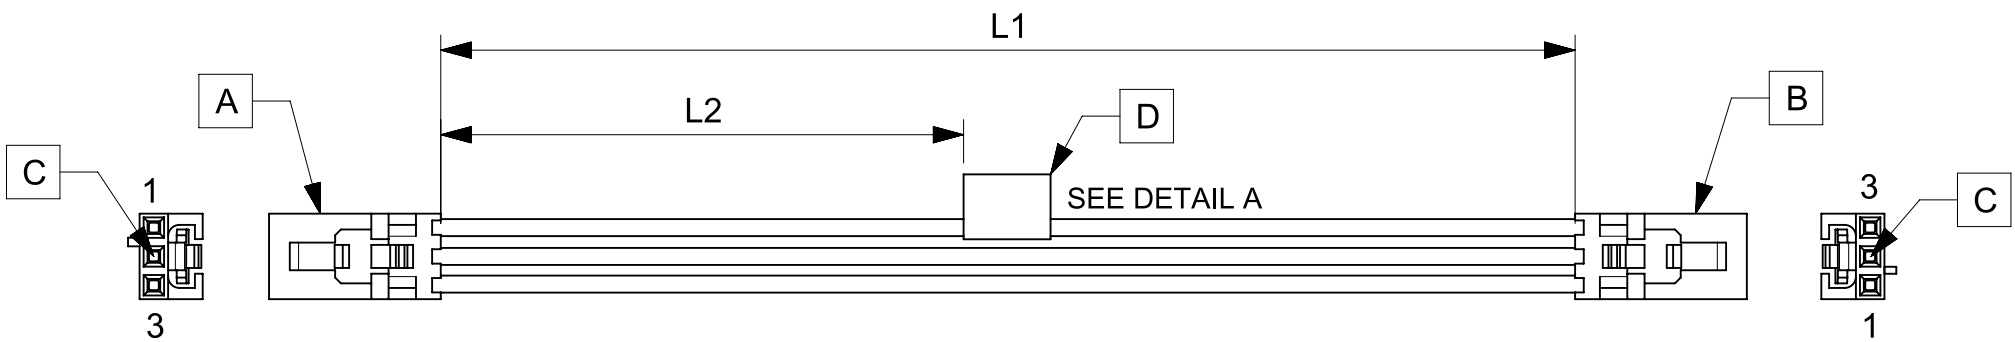


TABLE			
PART NUMBER	L1	L2	TITLE
2162701030	50±3	13 REF	SL POSITIVE LOCK R-R 3CKT 50MM Sn
2162701031	100±5	38 REF	SL POSITIVE LOCK R-R 3CKT 100MM Sn
2162701032	150±8	63 REF	SL POSITIVE LOCK R-R 3CKT 150MM Sn
2162701033	300±10	138 REF	SL POSITIVE LOCK R-R 3CKT 300MM Sn
2162701034	600±10	288 REF	SL POSITIVE LOCK R-R 3CKT 600MM Sn

- NOTES**
1. Cable assembly must pass 100% continuity and polarity test.
  2. Connector view shown is from mating side.
  3. Label text must be 2mm max. in height with Arial font.
  4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/05/05	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 642836		
	mm	NTS	DRWN: ARAJU 2020/05/05		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2020/08/05		
ANGULAR TOL ± °		APPR: RDESAI01 2020/08/05		PRODUCT CUSTOMER DRAWING	
4 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER	DOC TYPE
3 PLACES ±		DRWN: ARAJU 2020/05/05		2162701030	PSD
2 PLACES ±		APPR: RDESAI01 2020/08/05		000	A
1 PLACE ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NUMBER	CUSTOMER
0 PLACES ±		THIRD ANGLE PROJECTION	DRAWING	SEE TABLE	GENERAL MARKET
			A4-SIZE	SHEET NUMBER	1 OF 1
			SERIES		
			216270		