


Data sheet | Item number: 706-3033/400-100

System cable; for Schneider Modicon TM3; 2 analog inputs; Length: 1 m;

Conductor cross-section: 0.25 mm²

www.wago.com/706-3033/400-100

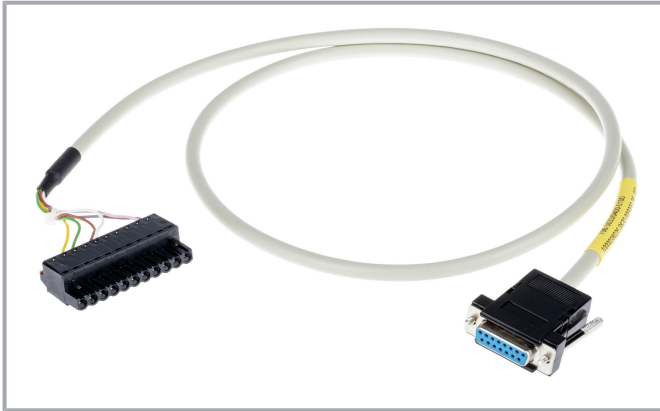

| Color coding acc. to DIN VDE 47100 | | 15 poles Sub-D connector | | PLC connector | |
|---------------------------------------|--|-----------------------------|--------|------------------|--------|
| | | Pin number | Wiring | Pin number | Signal |
| White | | 1 | 0+ | 6 | I0+ |
| Brown | | 2 | 0- | 7 | I0- |
| Green | | 3 | 1+ | 9 | I1+ |
| Yellow | | 4 | 1- | 10 | I1- |
| Grey | | 9 | +24V | 1 | +24V |
| Pink | | 10 | 0V | 2 | 0V |
| Blue | | 5 | 2+ | nc | |
| Red | | 6 | 2- | nc | |
| Black | | 7 | 3+ | nc | |
| Violet | | 8 | 3- | nc | |
| Grey-Pink | | 11 | nc | nc | |
| Red-Blue | | 12 | nc | nc | |
| White-Green | | 13 | nc | nc | |
| Brown-Green | | 14 | nc | nc | |
| White-Yellow | | 15 | nc | nc | |
| Shield | | Connected to Sub-D | | | |

Data Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

| | |
|-------------------------|-----------------|
| Inputs/outputs | 2 analog inputs |
| Operating voltage | ≤ AC/DC 35 V |
| Current per wire (max.) | 2 A |

Compatibility

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Schneider

| | |
|-----------------------|-------------|
| Schneider Modicon TM3 | TM3 AI2H(G) |
|-----------------------|-------------|

Connection data

| | |
|------------|-------------------|
| Cable type | LIYCY |
| Color code | per DIN VDE 47100 |

Connection 1

| | |
|--------------------|---------------------------------|
| Connector | D-subminiature female connector |
| Pole number 1 | 15 |
| Connection type 1 | System |
| Wire cross-section | 0.25 mm ² |

Connection 2

| | |
|-------------------|-------------|
| Connector 2 | TM3 AI2H(G) |
| Pole number 2 | 11 |
| Connection type 2 | System |

Physical data

| | |
|--------------|-----|
| Cable length | 1 m |
|--------------|-----|

Material Data

| | |
|--------|-------|
| Weight | 163 g |
|--------|-------|

Environmental requirements

| | |
|---------------------------------|----------------|
| Ambient temperature (operation) | -20 ... +50 °C |
|---------------------------------|----------------|

Commercial data

| | |
|-----------------------|---------------|
| ETIM 8.0 | EC000237 |
| ETIM 7.0 | EC000237 |
| PU (SPU) | 1 pcs |
| Packaging type | bag |
| Country of origin | FR |
| GTIN | 4055143623773 |
| Customs tariff number | 85444290900 |

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

pdf

Download

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

545.9 kB

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3033/400-100

URL

Download

System cable; for Schneider Modicon TM3; 2 analog inputs; Length: 1 m; Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.