

SUMMARY

Wires

Low voltage 34



Image is for illustrative purpose only

Series 2P
Termination type Female solder
IP rating 50
AWG wire size 0.00 - 0.00
Cable Ø 5.30 - 7.20 mm
Status active
Matching parts [CLH.M34.SLAG](#)

Download

[Request a quote](#)
[Eplan](#)
[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model CA*: Straight plug with cable collet and nut for fitting a bend relief
Keying 3 keys (alpha=0, gamma=80; Plug: female contacts; Receptacle: male contacts)
Housing Material PEI (Polyetherimide), gray
Weight 11.35 g

Performance

Configuration 2P.M34 : 34 Low V.
Insulator L: PEEK for solder contacts
Rated Current 1.5 Amps

Specifications

Test voltage (kV rms) Contact-contact: 0.7
Air clearance min.: 0.3 mm
Creepage distance min.: 0.3 mm


Others

Endurance (Shell): >1000 mating cycles
F ret (min): 150 N
F ret (max): 250 N

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Steam sterilization: > 100 times (with potting on rear connection)

DRAWINGS

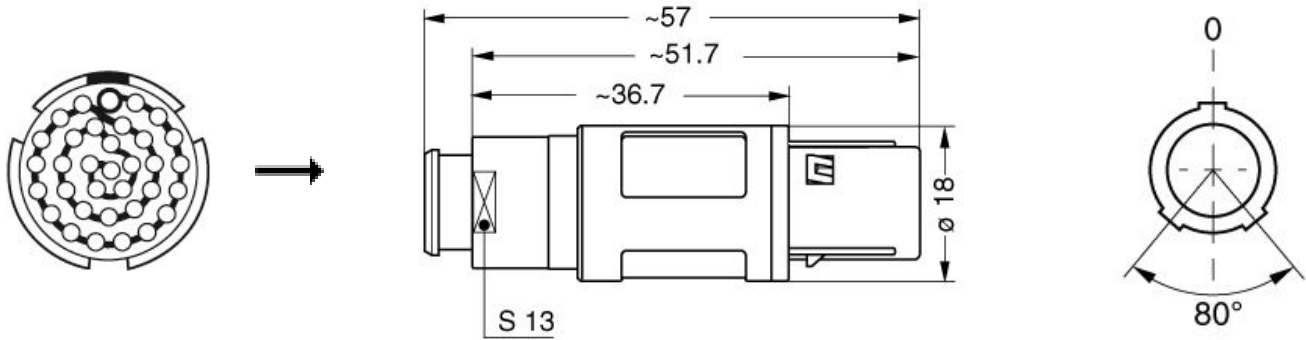

Dimensions

	A	L
mm.	18	57
in.	0,71	2,24

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.