



- Innovative Braided Flat Filament Technology
- Resists Damage From UV, Gasoline, Engine Chemicals And Salt Water
- Heavy Plastic Protection
- Smooth Inner Wall Reduces Internal Abrasion
- Extreme Cut And Abrasion Resistant
- Halogen Free



Cut Cleanly
Hot Knife

Material
Polyamide Monofilament

Grade
NHN

Flat Filament Thickness
.020"

Drawing Number
TF001NH-WD

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
		Min	Max				
3/8"	NHN0.38	1/4"	1/2"	500'	100'	BK,SVB,NO,HY	1.00
1/2"	NHN0.50	3/8"	5/8"	500'	100'	BK,SVB,NO,HY	1.40
3/4"	NHN0.75	5/8"	1"	250'	50'	BK,SVB,NO,HY	2.10
1"	NHN1.00	7/8"	1 1/4"	250'	50'	BK,SVB,NO,HY	2.20
1 1/4"	NHN1.25	1"	1 1/2"	250'	50'	BK,SVB,NO,HY	2.50
1 1/2"	NHN1.50	1 1/4"	1 3/4"	100'	25'	BK,SVB,NO,HY	3.40
1 3/4"	NHN1.75	1 1/2"	2"	100'	25'	BK,SVB,NO,HY	4.00
2"	NHN2.00	1 3/4"	2 1/2"	100'	25'	BK,SVB,NO,HY	4.40
3"	NHN3.00	2 1/4"	3 1/2"	100'	25'	BK,SVB,NO,HY	6.50

Innovative Flat Filament Braided For High Abrasion Resistance

The latest innovation in Techflex® material design is the concept of using different shaped filaments to create strength, stiffness or a variety of other effects.

Gorilla Sleeve is engineered from flat filaments of tough and strong 6-6 nylon to achieve a thick abrasion guard for use on hoses. This type of sleeve has been tested against competitor's abrasion guards that mix materials in an effort to gain slight abrasion advantages.

Gorilla Sleeve achieves better results without sacrificing great looks or flexibility.

Constant abuse from road hazards, abrasion and vibration make Gorilla Sleeving the choice to protect hoses in over road vehicles.


Colors Available:



Black (BK), Silver Back (SVB), Neon Orange (NO), & Highlighter Yellow (HY).

Colors Available:

Black (BK),
Neon Orange (NO),
& Highlighter Yellow (HY)

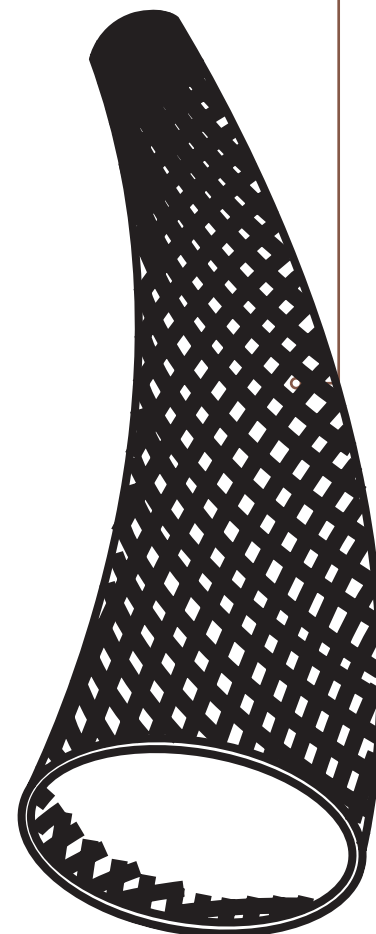

www.techflex.com

1 (833) SLEEING • (973) 300-9242 • fax: (973) 300-9409
104 Demarest Road • Sparta, NJ 07871





ABRASION

Abrasion Resistance
Extreme

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
80°F

Humidity
72%

Minor Scuffing
100 Test Cycles

One Broken Strand
900 Test Cycles

Second Broken Strand
1,200 Test Cycles

One Strand Pulled Out Of Material
3,500 Test Cycles

Material Destroyed
4,400 Test Cycles

Pre-Test Weight
7,191.6 mg

Post-Test Weight
6,761.4 mg

Test End Loss Of Mass
Point Of Destruction
430.2 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	5
Strong Oxidants _____	5
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	2
Fungus ASTM G-21 _____	2
Halogen Free _____	Yes
RoHS _____	Yes

Melt Point
ASTM D-2117
509°F (265°C)

Maximum Continuous
Mil-I-23053
302°F (150°C)

Minimum Continuous
-76°F (-60°C)

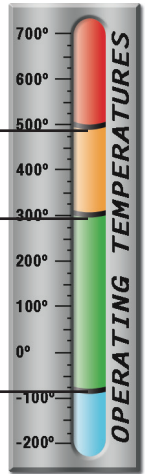

PHYSICAL PROPERTIES

Flat Filament _____	.020"
Flammability Rating _____	
Recommended Cutting _____	Hot Knife
Colors _____	4
Wall Thickness _____	.05"
Tensile Strength (Yarn) _____	19
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.12
Moisture Absorption _____	2.5
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595	
TML _____	1.10
CVCM _____	.01
WVR _____	.69
Smoke D-Max _____	56
ASTM E-662	
Outgassing _____	High
Oxygen Index _____	22
ASTM D-2863	

© 2021 Techflex® - Any unauthorized reproduction, in whole or part, in any medium whatsoever, without the express written permission of Techflex® is strictly forbidden.
Techflex® product names and logos are registered trademarks of Techflex®, unless otherwise attributed. The contents and illustrations contained herein are believed to be reliable. Techflex® makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Techflex's® only obligations are those in standard terms of sale for these products and Techflex® will not be liable for any consequential or other damages arising due to misuse of these products or typographical errors or omissions.
Users should make their own evaluation to determine the suitability of these products for their unique and specific applications. 07-28