


VC2220K801R075

VC, Varistors, Low Voltage, 100 V, 75 VAC, 120 V, 200 V, 10 A, 800 A, 6.2 J, 20 $\,\mathrm{mW}$

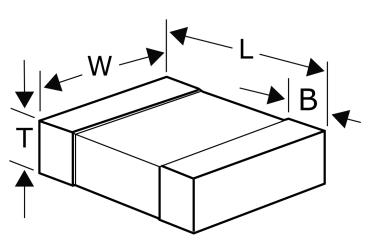

Click here for the 3D model.

Dimensions	
Chip Size	2220
L	5.7mm +/-0.5mm
W	5mm +/-0.4mm
Т	1.9mm MAX
В	0.5mm +/-0.25mm

Packaging Specifications		
Packaging	T&R	
Packaging Quantity	1000	

General Information	
Series	VC
Туре	Varistors
Style	SMD Chip
Description	Surface Mount Varistors
Features	Low Voltage
Termination	Nickel Tin
RoHS	Yes
Qualifications	IEC, UL, AEC-Q200
AEC-Q200	Yes

Specifications	
Voltage DC	100 VDC (25C)
Voltage AC	75 VAC
Temperature Range	-55/+125°C
Storage Temperature Range	-55/+150°C
Varistor Voltage	120 VDC at 1 mA
Clamping Voltage	200 V
Clamping Current	10 A (8/20 us MAX)
Surge Current	800 A (8/20 us MAX)
Energy	6.2 J (10/1000 us MAX)
Capacitance	700 pf (1kHz)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.