



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	A	NEW RELEASE PER ECO-16-000996	160122	JPF	JPF		

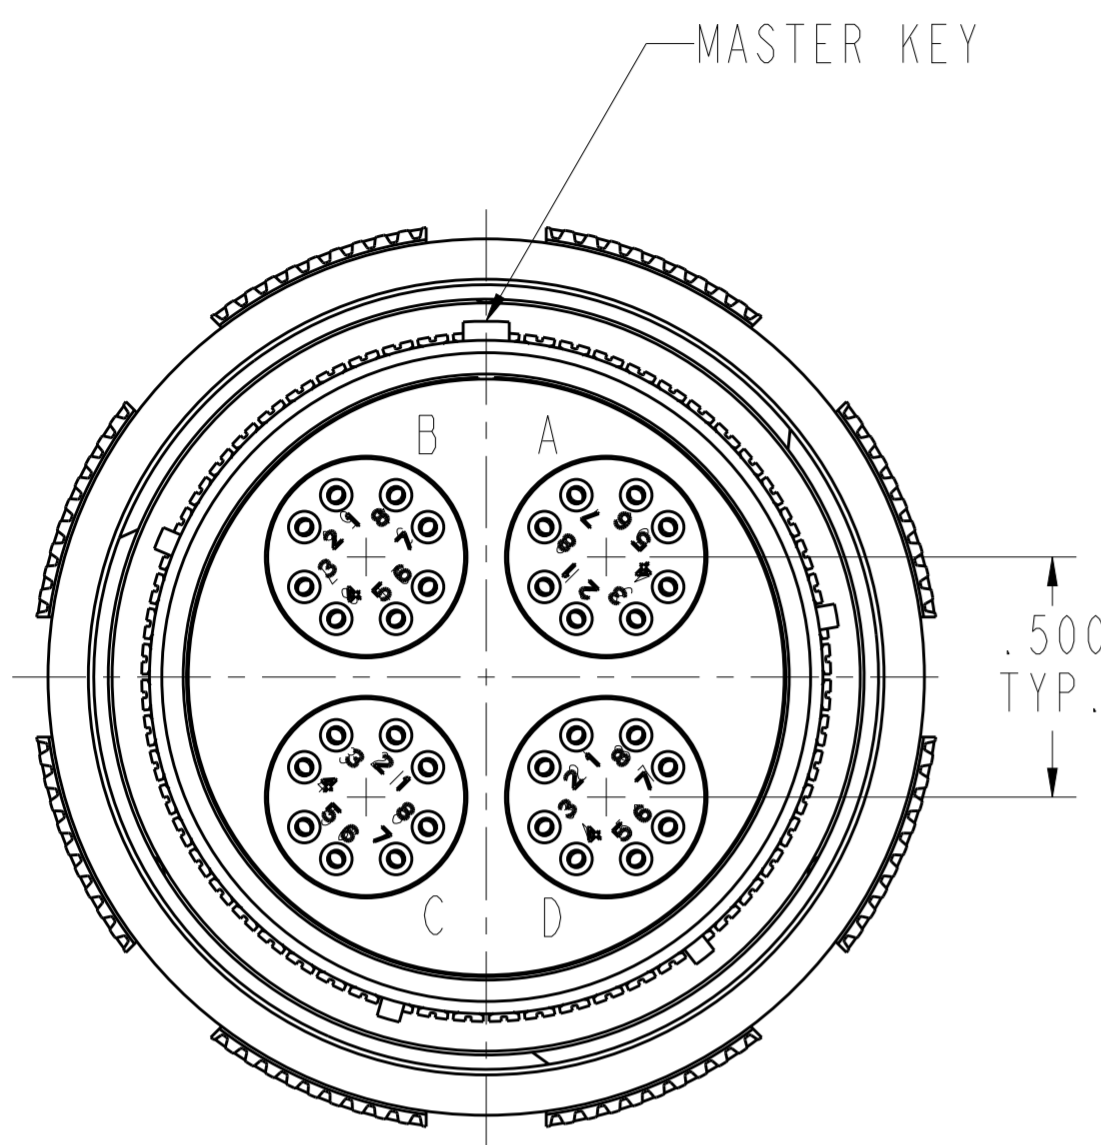

SOCKET INSERT MARKING SHOWN ABOVE

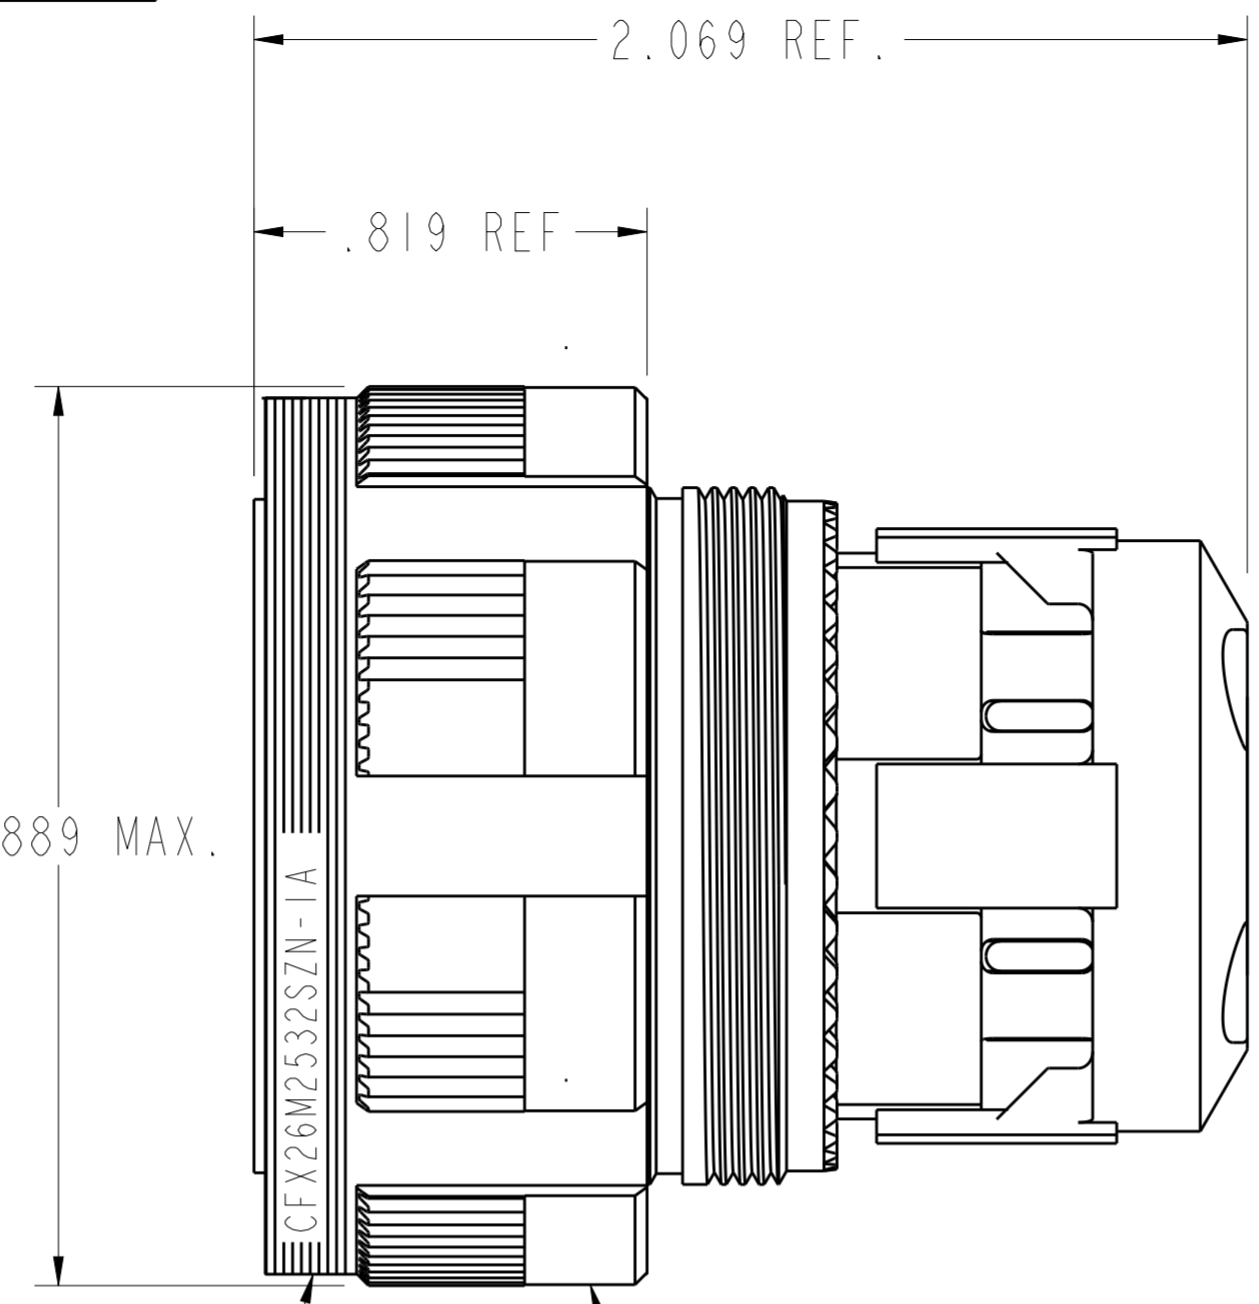

BLUE BAND REF. SHELL, PLUG R.F.I. ASSEMBLY

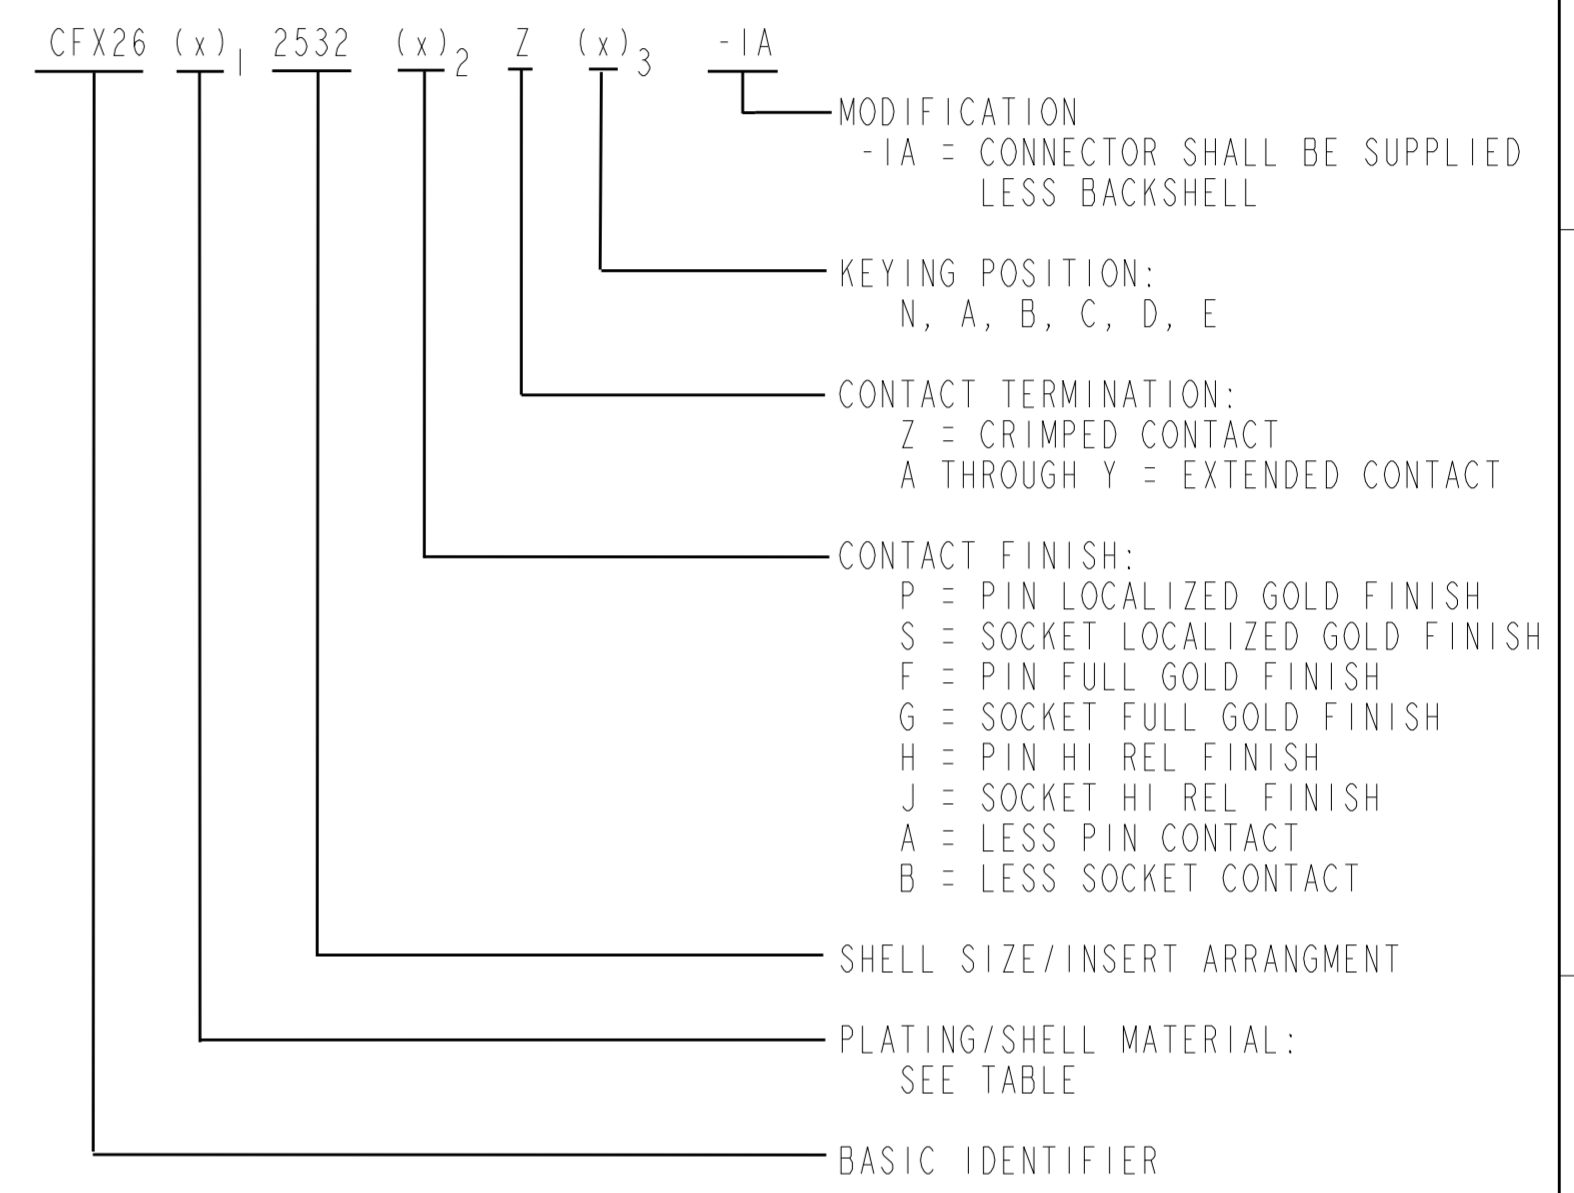

7. COMPOSITE WEIGHT WITHOUT MODULES AND CABLE: 0.206 POUNDS.
 METAL WEIGHT WITHOUT MODULES AND CABLE: 0.246 POUNDS.
 PIN MODULE, FOLLOWER AND BRAID SUPPORTS WEIGHT: .011 LBS.
 SOCKET MODULE, FOLLOWER AND BRAID SUPPORTS WEIGHT: .017 LBS.

6. MATES WITH CFX20x2532xxx OR CFX24x2532xxx.

5. SEE TABLE FOR TEMPERATURE RATINGS.

4. FINISH: SHELL - SEE TABLE.
 CONTACTS - SEE PART NUMBER BREAKDOWN.

3. MATERIAL: SHELL & COUPLING RING - SEE TABLE.
 CONTACTS - COPPER ALLOY.
 RESILIENT INSERTS - SILICONE ELASTOMER.
 PLASTIC INSERTS - THERMOPLASTIC.

2. FOR AVAILABILITY CONSULT FACTORY.

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

PART NUMBER (x) ₁	PLATING	SHELL MATERIAL	TEMPERATURE RATING
M	NICKEL	COMPOSITE	-65°C TO 200°C
J	O.D. CAD	COMPOSITE	-65°C TO 175°C
F	NICKEL	ALUMINUM	-65°C TO 200°C
W	O.D. CAD	ALUMINUM	-65°C TO 175°C
S	NICKEL	STAINLESS STEEL	-65°C TO 200°C
T	TEFLON NICKEL	ALUMINUM	-65°C TO 175°C
Z	BLACK ZINC NICKEL	ALUMINUM	-65°C TO 175°C

SIZE 25 PART NUMBER(x) ₃	POS
CFX26x2532xZN	N
CFX26x2532xZA	A
CFX26x2532xZB	B
CFX26x2532xZC	C
CFX26x2532xZD	D
CFX26x2532xZE	E

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN MALI 4NOV2013
 CHK JPF 160122
 APVD AR 160122

TE Connectivity

CONNECTOR, PLUG
 THREADED COUPLING
 2532 ARRANGEMENT, -1A MOD

SIZE A2 CAGE CODE 11139 DRAWING NO. C-CFX26x2532xxx-1A RESTRICTED TO -

CUSTOMER DRAWING SCALE 2.500 SHEET 1 OF 1 REV A