

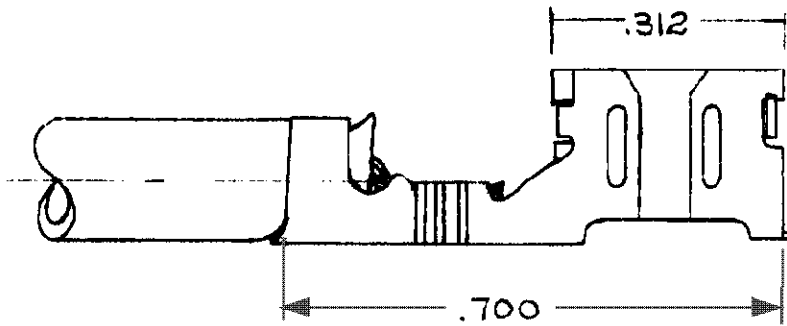


NUMBER  
42072

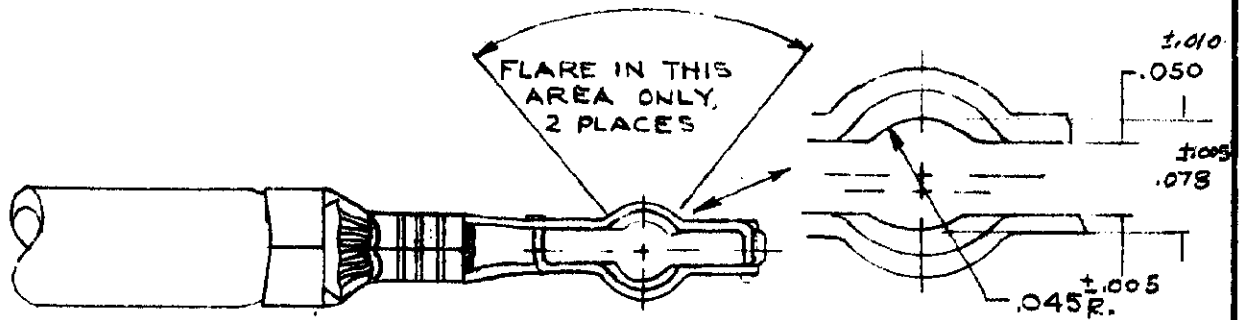

PROPER FRICTION  
FIT ON AN .090 DIA. PIN.



TERM. NO.	FINISH	
<del>42072-0</del>	<del>NONE</del>	<del>OBSOLETE</del>
42072-1	TIN	
<del>42072-2</del>	<del>SILVER</del>	<del>OBSOLETE</del>

FOR MODERNIZED EQUIVALENT  
SEE SUPPLEMENT TO C-42670

FOR FOREIGN PRODUCTION  
ONLY

CUSTOMER DRAWING

DIMENSIONS IN INCHES DO NOT SCALE PRINT

MATERIAL <i>COMP</i> .016 PHOS. BRONZE		© 1961 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.	
FINISH SEE TABLE		AMP INCORPORATED HARRISBURG, PENNA.	
WIRE SIZE #18 #16 A.W.G.		INSULATION DIA. .135-.160	
TOLERANCE EXCEPT AS NOTED ± .015 ± .1°		SCALE 4-1	
LTR REVISION RECORD		LGC AG A	
E1 ECR-06-005161		NO 42072	
E OBSOLETE 0-0-2			
D REDRAWN & REVISED			
DR C. MEYERS 10-30-61		DE J. ENSLEY 11-1-61	
CHK R.D. [Signature] 10-30-61		APP Edwin S. [Signature] 11-1-61	
NAME PIN RECEPTACLE			

PRINT LIST  
53