VIEW ON MATING SIDE

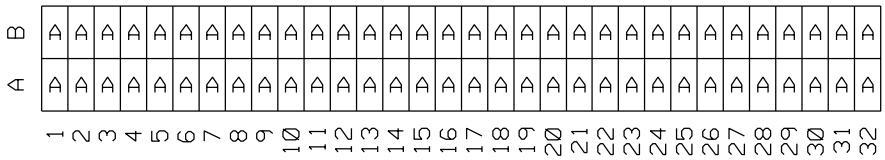

A = 64 CONTACTS L=4,5

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85040-0001 sht.1
Technical Data	PS-85042-0001

A	G2/0	a1-32 b1-32
Contact symbol	Perform. level	Contact position number

ECN 2264
Produktspec.
96-10-18 KN

A1

REVISIONS

LTR

FOR PREVIOUS REVISIONS SEE MRI LIST

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°

	INCH	METRIC
3 PLACE	± .	±
2 PLACE	± .	±
1 PLACE	± .	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☐ MM ☐ IN.

EQUIVALENT DIMENSION ☐ MM ☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY Ca	SIGN
CHK'D BY KN	SIGN
APP'D BY	SIGN
SCALE	

REVISE ONLY ON CAD SYSTEM | SH. | REV.

CADCAM PROJECT NAME s8504000 s51

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
64 pos. female connector
acc. DIN 41612 style B
contacts arrangement

molex MOLEX EUROPE

SHEET NO. 1 OF 1

DATE 96/05/15

PART NO. 85040-0050

DWG NO. SDA-85040-0050

SIZE A