


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF I/O INTERCONNECT INC. U.S.A. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF I/O INTERCONNECT INC. OR ITS AFFILIATED SUBSIDIARIES.

| DWG. NO. | ZONE | REV. | DESCRIPTION | DATE | APPROVED |
|-----------|------|------|--|----------|----------|
| XXB-52X-D | | C | ECN 9295 | 08/20/01 | K.C. |
| | | D | ADD NOTE & CHANGE P/N TO ROHS COMPLIANT PER ECN 9831 | 04/21/05 | M.G. |

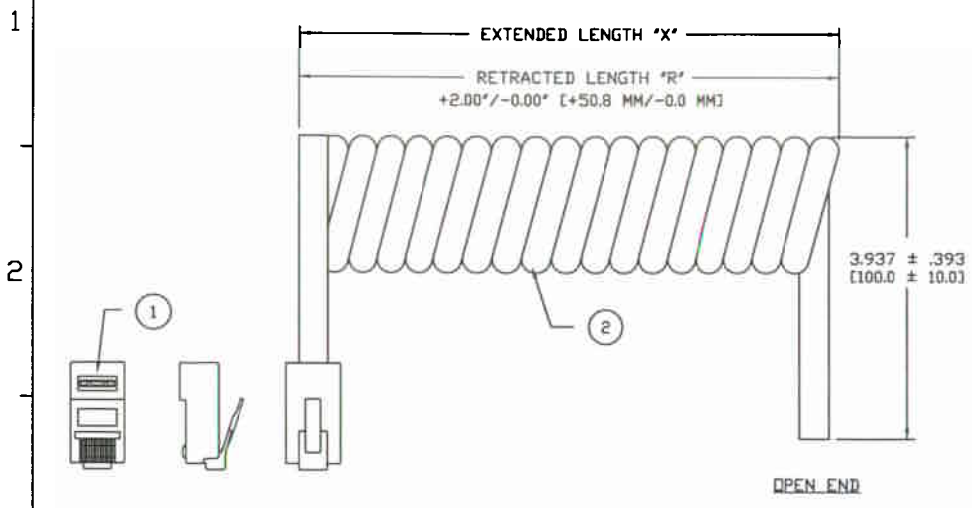

| T.B.D. | GLF-488-148-525-D | GLF-121-810-022 | 14.0 FT [4.3 M] | 50.0 IN [1270.0 MM] | WHITE |
|----------------------|-------------------|-----------------------|---------------------|----------------------|--------------|
| T.B.D. | GLF-488-148-524-D | GLF-121-810-012 | 14.0 FT [4.3 M] | 50.0 IN [1270.0 MM] | BLACK |
| T.B.D. | GLF-488-148-523-D | GLF-121-810-002 | 14.0 FT [4.3 M] | 50.0 IN [1270.0 MM] | SILVER SATIN |
| T.B.D. | GLF-488-108-522-D | GLF-121-810-021 | 10.0 FT [3.0 M] | 42.0 IN [1066.8 MM] | WHITE |
| T.B.D. | GLF-488-108-521-D | GLF-121-810-011 | 10.0 FT [3.0 M] | 42.0 IN [1066.8 MM] | BLACK |
| T.B.D. | GLF-488-108-520-D | GLF-121-810-001 | 10.0 FT [3.0 M] | 42.0 IN [1066.8 MM] | SILVER SATIN |
| T.B.D. | GLF-488-078-525-D | GLF-121-810-020 | 7.0 FT [2.1 M] | 28.0 IN [711.2 MM] | WHITE |
| H3882-07C-ND | GLF-488-078-524-D | GLF-121-810-010 | 7.0 FT [2.1 M] | 28.0 IN [711.2 MM] | BLACK |
| T.B.D. | GLF-488-078-523-D | GLF-121-810-000 | 7.0 FT [2.1 M] | 28.0 IN [711.2 MM] | SILVER SATIN |
| T.B.D. | GLF-488-058-522-D | GLF-121-810-023 | 5.0 FT [1.5 M] | 22.0 IN [558.8 MM] | WHITE |
| T.B.D. | GLF-488-058-521-D | GLF-121-810-013 | 5.0 FT [1.5 M] | 22.0 IN [558.8 MM] | BLACK |
| T.B.D. | GLF-488-058-520-D | GLF-121-810-003 | 5.0 FT [1.5 M] | 22.0 IN [558.8 MM] | SILVER SATIN |
| DIGI-KEY PART NUMBER | IDI PART NUMBER | IDI CABLE PART NUMBER | EXTENDED LENGTH "X" | RETRACTED LENGTH "R" | |

TABULATION BLOCK

NOTES: UNLESS OTHERWISE SPECIFIED.

- TEST CABLE FOR ALL OPENS & SHORTS.
- PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN PLASTIC BAG. PACKAGE INDIVIDUAL BAG PER LDT NUMBER QUANTITIES.
- MARK OUTSIDE OF SHIPPING BOX WITH CUSTOMER PART NUMBER.
- PLACE BAR CODE LABEL ON THE OUTSIDE OF EACH SHIPPING BOX LABEL DETAIL SEE DWG 090-990-001.
- ALL MATERIAL SHOULD BE ROHS COMPLIANT.

| ITEM | QTY | MFG. | IDI PART NO. | DESCRIPTION |
|------|--------|------|------------------------|---|
| 2 | *X* FT | IDI | SEE "TABULATION BLOCK" | MODULAR COIL CABLE, 26 AWG (7/34) BARE COPPER, 8 CONDUCTOR, UNSHIELDED, PVC JACKET, (SEE TABULATION BLOCK FOR COLOR). ROHS COMPLIANT. |
| 1 | 1 PC | IDI | GLF-325-881-50X | CONNECTOR, MODULAR PLUG, 8 POSITION, 8 CONDUCTOR, 50u" Au, FLAT TYPE EXIT. ROHS COMPLIANT. |

CABLE ASSEMBLY PARTS LIST

THIRD ANGLE PROJECTION

UNLESS OTHERWISE NOTED:
1) DIMENSIONS ARE IN INCHES (MILLIMETER)
2) TOLERANCES:
XXX ± 0.25 [6.35]

| | |
|--|---|
| I/O INTERCONNECT SANTA ANA, CALIFORNIA | |
| DR. BY: JERRY SUN DR. CHECKED: | TITLE: BPBC COIL CABLE TO OPEN END, CABLE ASSEMBLY P/N: H388X-XXC-ND |
| NO: | PART NO: GLF-488-XXB-52X-D |
| CHECKED: | DWG NO: GLF-488-XXB-52X-D |
| CUT/SALES: | CUSTOMER: DIGI-KEY |
| SA: | SCALE: NONE |
| | REV. D SHEET 1 OF 1 |