





# American Opto Plus LED Corp.

## L955LYQPGLEC

3.5 x 2.8 x 1.8 mm RGY SMD LED

### PACKAGE OUTLINES

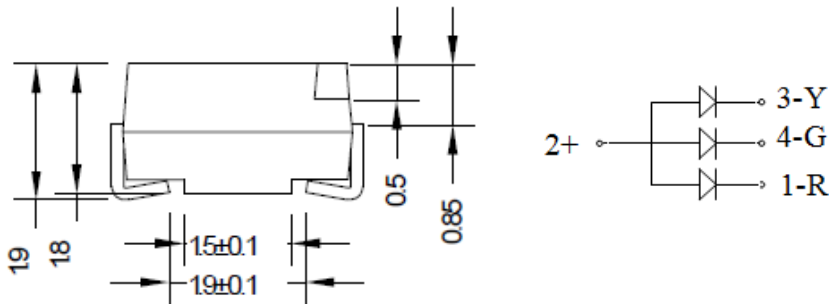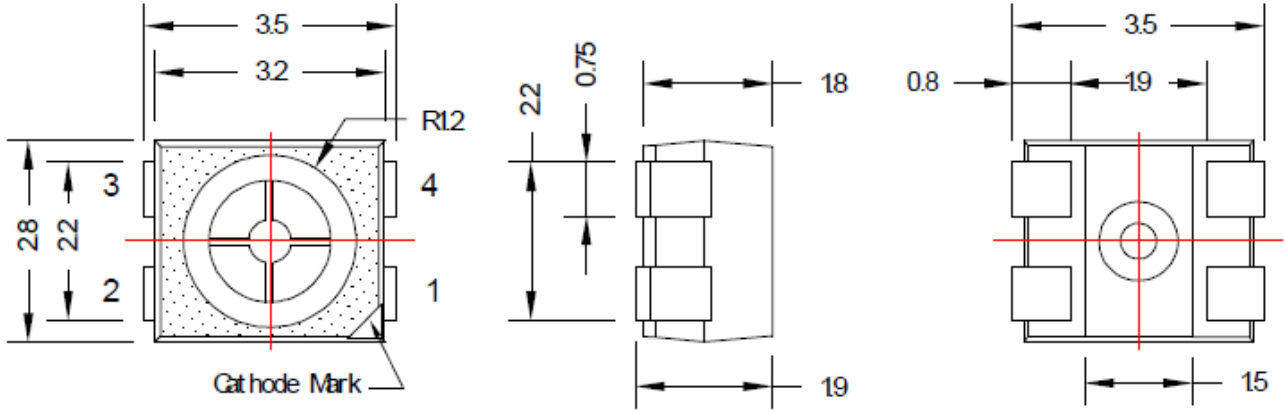

Unit:mm  
GENERAL TOL.  $\pm 0.05$

Item	Materials
Package	Heat-Resistant Polymer(Black Face)
Encapsulating Resin	Silicone
Electrodes	Ag Plating Copper Alloy

#### Notes:

1. All dimensions in mm.
2. Electrical connections between all cathodes are recommended.

Part Number	Material	Lens Color	
		Emitted	Lens
L955LYQPGLEC	AlGaInP	Red	Water Clear
	InGaN	Green	
	AlInGaP/GaAs	Yellow	



# American Opto Plus LED Corp.

## L955LYQPGLEC

3.5 x 2.8 x 1.8 mm RGY SMD LED

### ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

Parameter	Symbol	Ratings		Unit
DC Forward Current	If	R	30	mA
		G	25	
		Y	30	
Peak Forward Current (Duty 1/10@1KHZ)	Ifp	R	100	mA
		G	100	
		Y	100	
Power Dissipation Single Color	Pd	R	72	mW
		G	90	
		Y	72	
Total Power Dissipation	Ptot	250		V
Human Body Mode	Hbm	>1000		mW
Reverse Voltage	Vr	5		V
Operating Temperature	Topr	-40~+85		°C
Storage Temperature	Tstg	-40~+100		°C
Soldering Temperature	Tsol	Reflow Soldering: 260°C for 5 sec. Hand Soldering: 350°C for 3 sec.		

*Ifp conditions: Pulse width ≤ 10msec, and duty ≤ 1/10*

*Value for total power dissipation when two or more device are lit simultaneously.*



# American Opto Plus LED Corp.

## L955LYQPGLEC

3.5 x 2.8 x 1.8 mm RGY SMD LED

### OPTICAL-ELECTRICAL CHARACTERISTICS

(Ta=25°C)

Parameter	Test Condition	Test Condition	Min	Typ	Max	Unit	
Forward Voltage	I <sub>F</sub> =20mA	V <sub>f</sub>	R	--	2.0	2.4	V
			G	--	3.2	3.6	
			Y	--	2.0	2.4	
Reverse Current	I <sub>F</sub> =20mA	I <sub>r</sub>	R	--	--	10	uA
			G	--	--	10	
			Y	--	--	50	
Luminous Intensity	I <sub>F</sub> =20mA	I <sub>v</sub>	R	250	400	--	mcd
			G	700	1200	--	
			Y	250	400	--	
Luminous Flux	I <sub>F</sub> =20mA	∅V	R	--	1.2	--	lm
			G	--	3.8	--	
			Y	--	1.1	--	
Dominant Wavelength	I <sub>F</sub> =20mA	λ <sub>d</sub>	R	--	630	--	nm
			G	--	525	--	
			Y	--	590	--	
Viewing Angle	I <sub>F</sub> =20mA	2∅1/2	--	120	--	deg	




# American Opto Plus LED Corp.

## L955LYQPGLEC


3.5 x 2.8 x 1.8 mm RGY SMD LED

### TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES


Forward Current vs. Forward Voltage

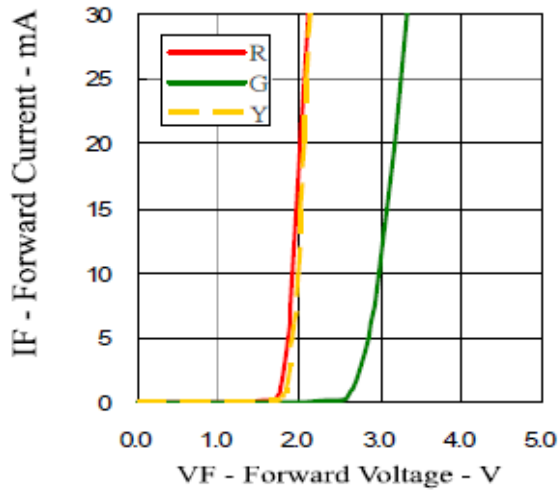


Relative Intensity vs. Forward Current

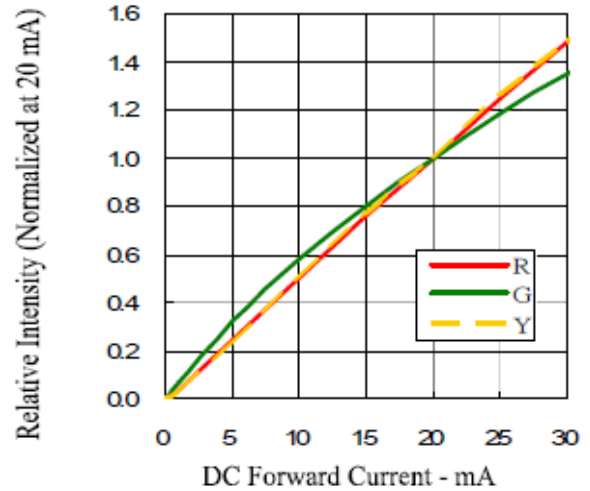

Forward Current vs. Ambient Temperature

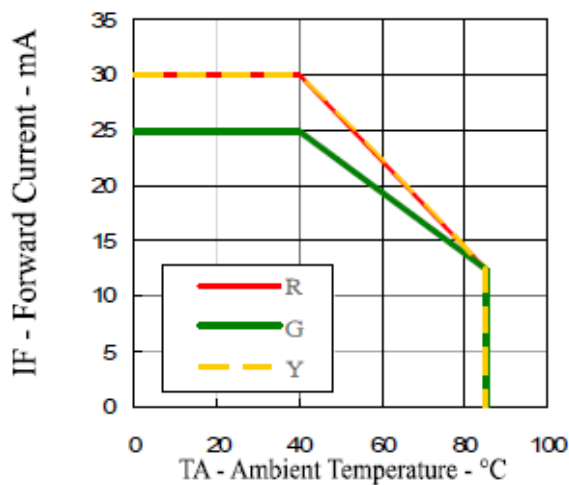

Relative Intensity vs. Wavelength

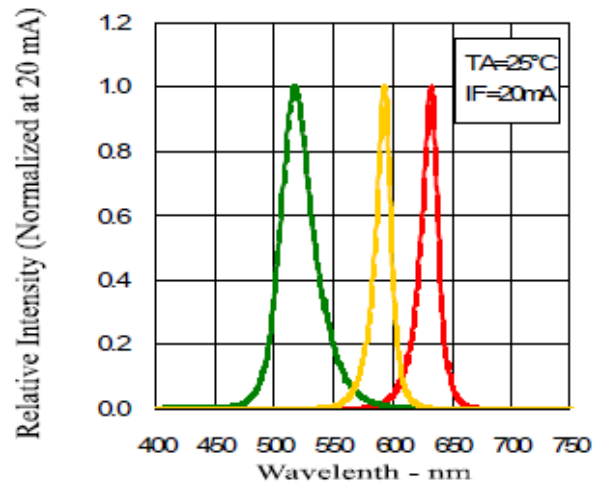





# American Opto Plus LED Corp.


## L955LYQPGLEC

3.5 x 2.8 x 1.8 mm RGY SMD LED

### RADIATION PATTERN

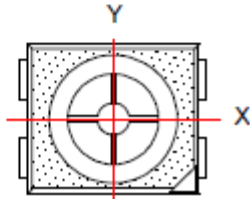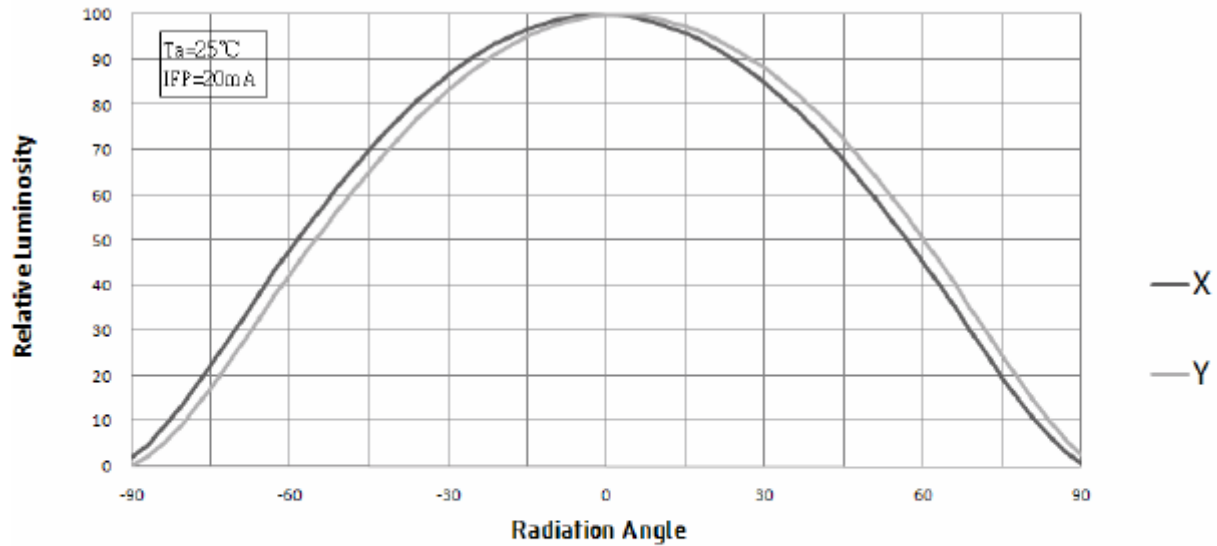

### RECOMMENDED SOLDERING PAD PATTERN

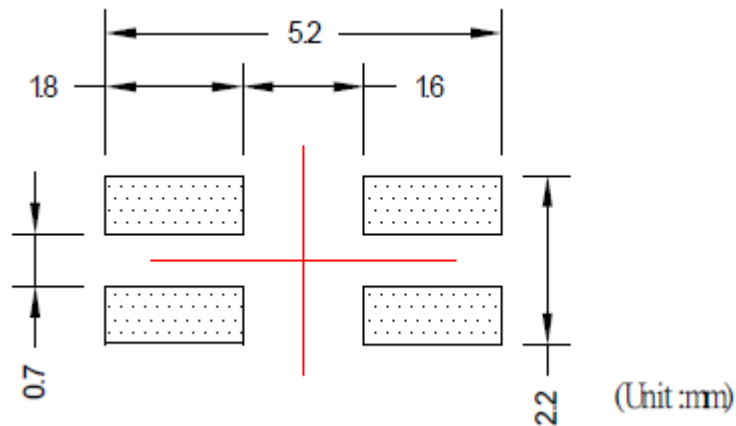




# American Opto Plus LED Corp.


## L955LYQPGLEC

3.5 x 2.8 x 1.8 mm RGY SMD LED

### SOLDERING CONDITIONS

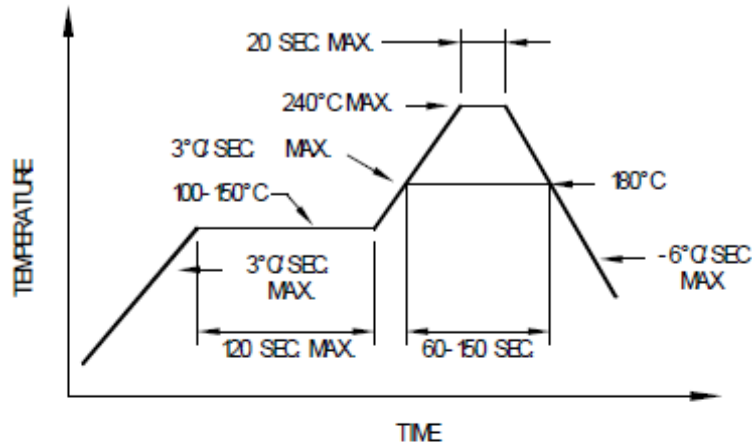

Recommended reflow soldering profile

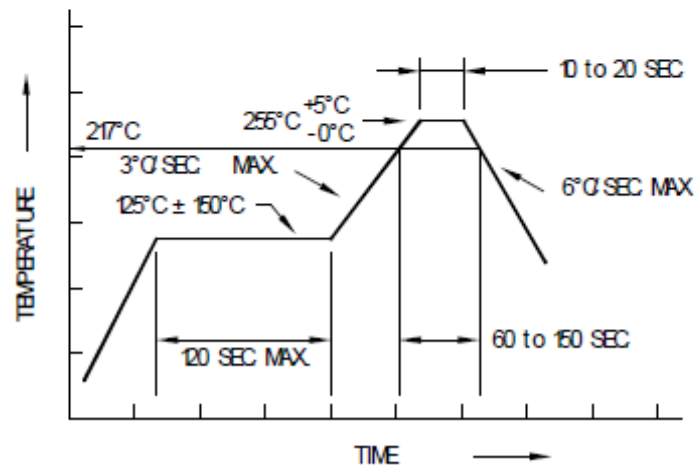

Recommended Pb-free reflow soldering profile

- Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.
- Reflow soldering should not be done more than two times.
- When soldering, do not put stress on the LEDs during heating.
- After soldering, do not warp the circuit board.




# American Opto Plus LED Corp.


## L955LYQPGLEC

3.5 x 2.8 x 1.8 mm RGY SMD LED

### TAPE DIMENSIONS

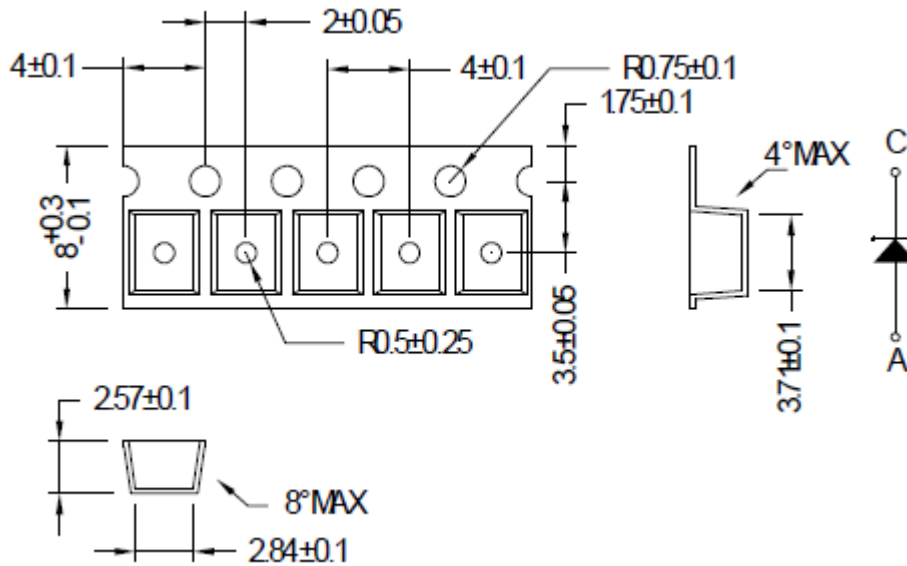

### TAPE LEADER AND TRAILER DIMENSIONS

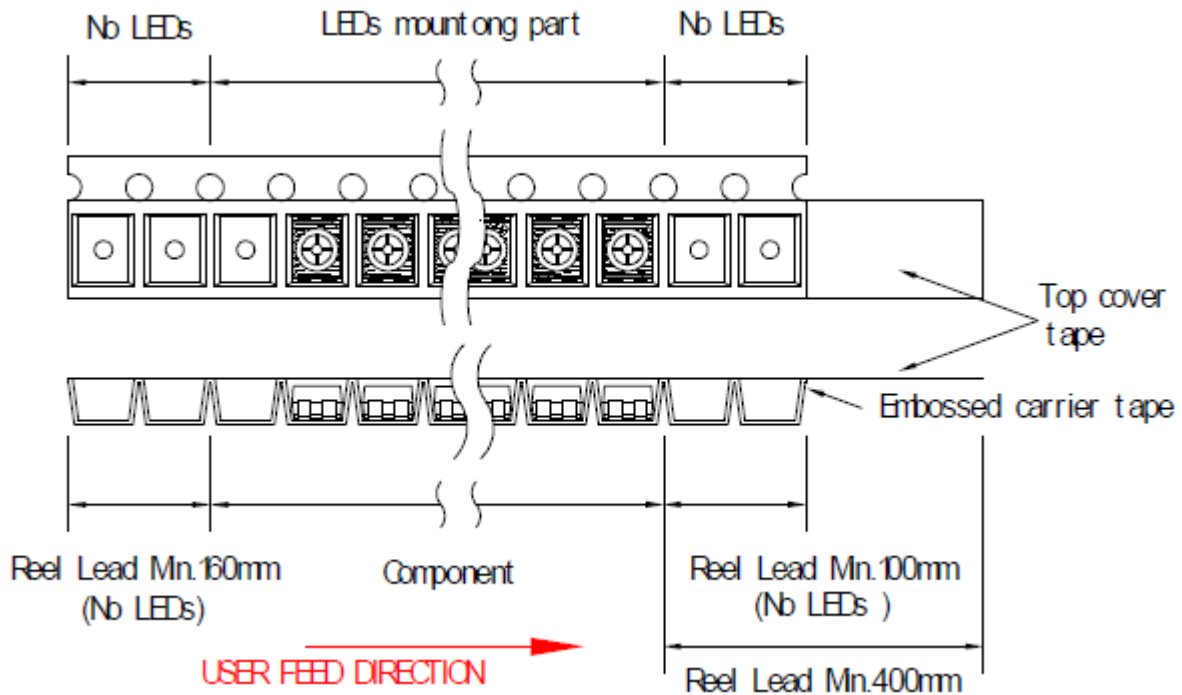




**American Opto Plus LED Corp.**

**L955LYQPGLEC**

**3.5 x 2.8 x 1.8 mm RGY SMD LED**

## REEL DIMENSIONS

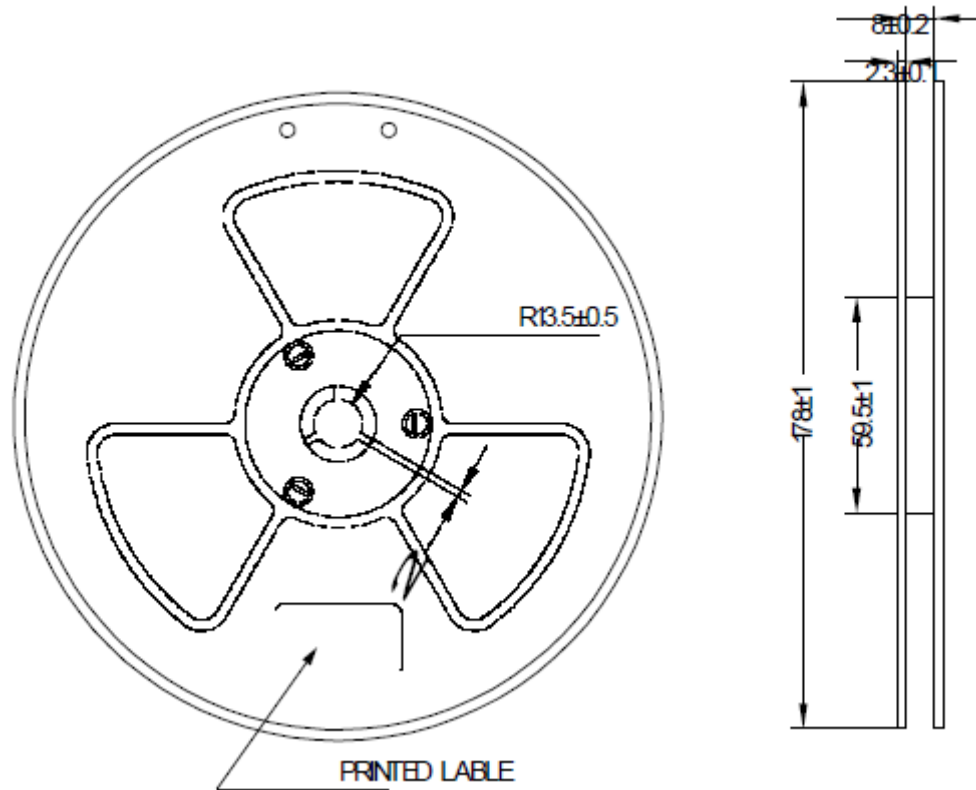

### Notes:

1. Baking is required under the following conditions: The pack has been opened for more than four weeks.
2. Baking recommended conditions:  $60 \pm 5^\circ\text{C}$  for 20 hours.
3. Reel size: 2000 pcs/reel