

MIRA-M

~30° medium beam


TECHNICAL SPECIFICATIONS:


Dimensions	Ø 32.4 mm
Height	14.7 mm
Fastening	glue
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	7.3 kg
Quantity in Box	840 pcs
ROHS compliant	yes ⓘ




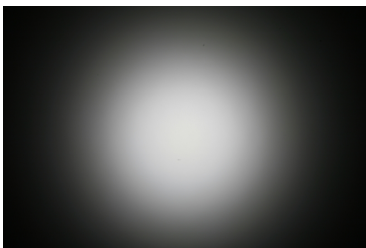
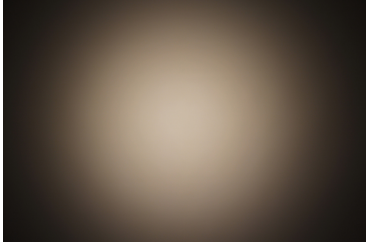
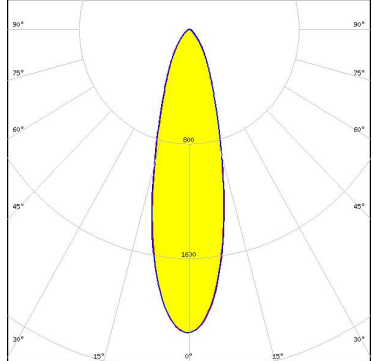
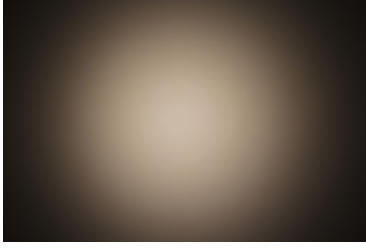
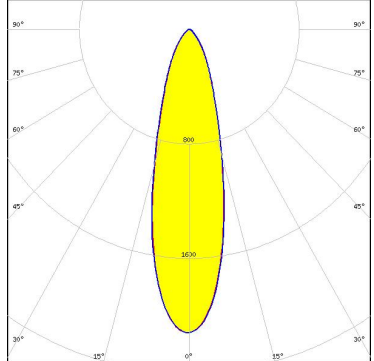
MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
MIRA-M	Single lens	PC	clear

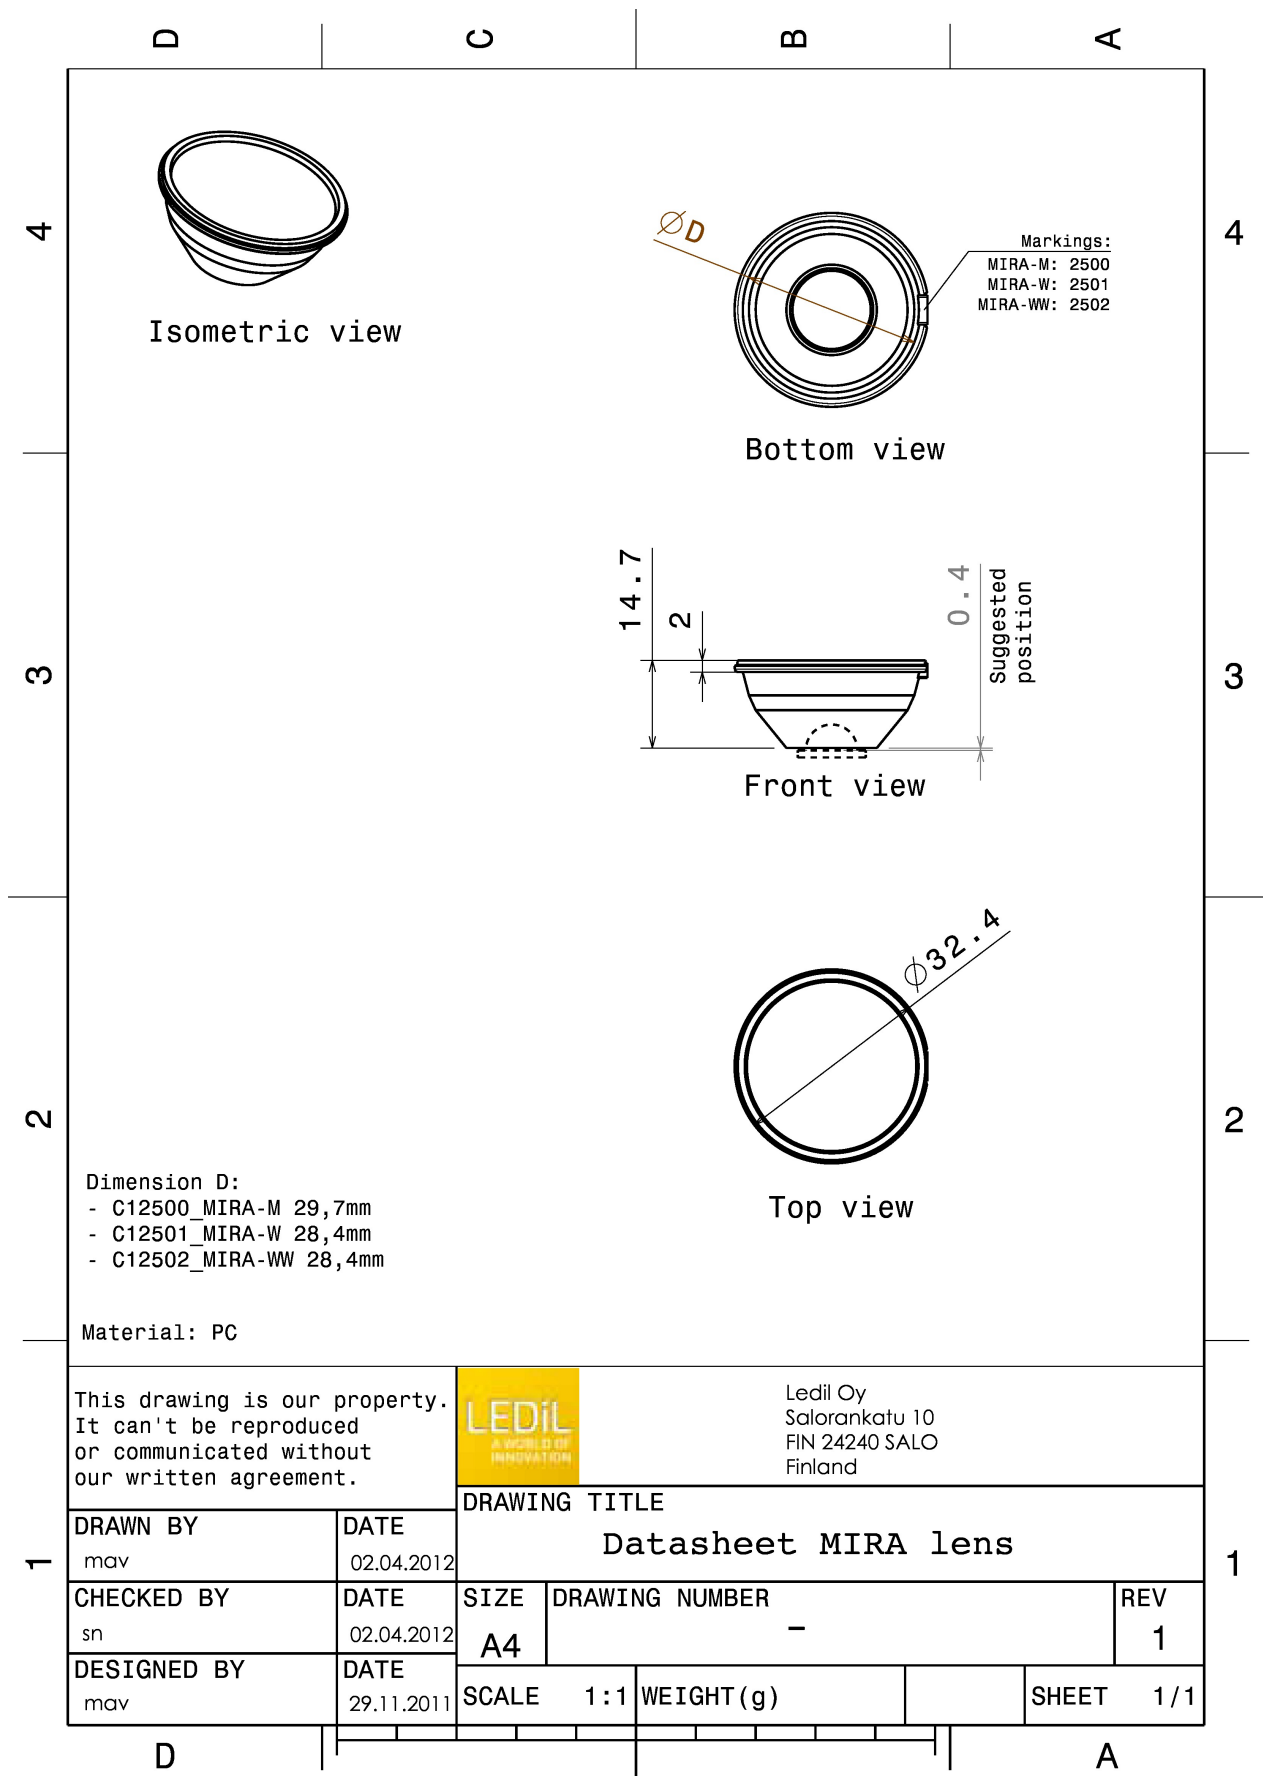

This drawing is our property. It can't be reproduced or communicated without our written agreement.				Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
DRAWING TITLE		Datasheet MIRA lens			
DRAWN BY mav	DATE 02.04.2012	SIZE A4		DRAWING NUMBER -	REV 1
CHECKED BY sn	DATE 02.04.2012	SCALE 1:1	WEIGHT (g)	SHEET 1/1	
DESIGNED BY mav	DATE 29.11.2011				


PHOTOMETRIC DATA (MEASURED):

<p>bridgelux</p> <p>LED BXRA ES Star</p> <p>FWHM 30.0°</p> <p>Efficiency 82 %</p> <p>Peak intensity cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>bridgelux</p> <p>LED V10 Gen6</p> <p>FWHM 35.0°</p> <p>Efficiency 77 %</p> <p>Peak intensity 1.760 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	
<p>CREE ⇄</p> <p>LED CXA/B 15xx</p> <p>FWHM 31.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 2.000 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	 
<p>CREE ⇄</p> <p>LED MHD-E/G</p> <p>FWHM 28.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 2.100 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components:</p>	 



PHOTOMETRIC DATA (MEASURED):




LED MT-G
FWHM 28.0°
Efficiency 83 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

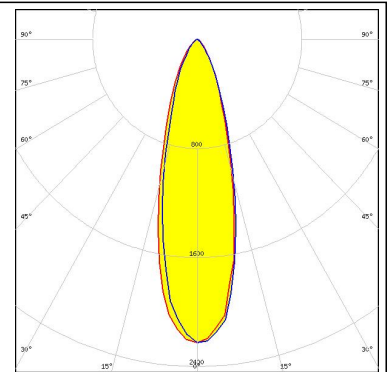


LED XHP70
FWHM 27.0°
Efficiency 83 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

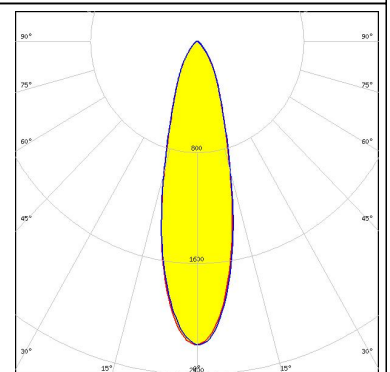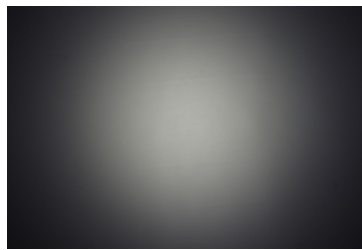









LED LUXEON M/MX
FWHM 25.0°
Efficiency 81 %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

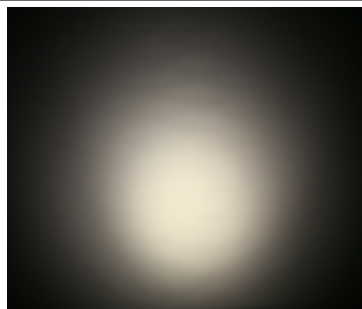


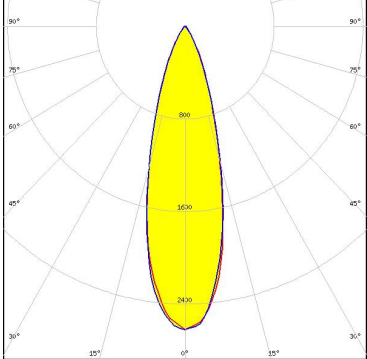

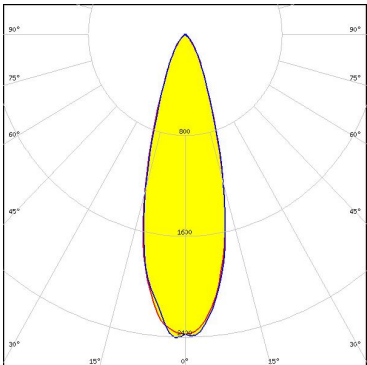

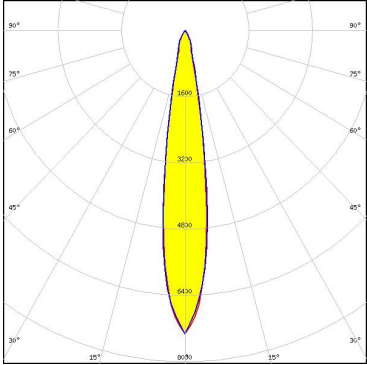

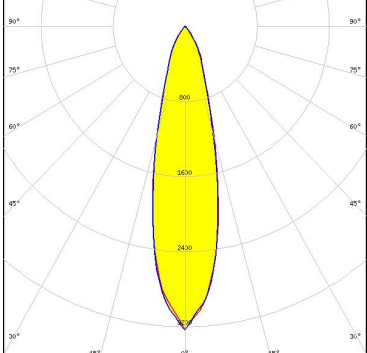
LED LUXEON MZ
FWHM 19.0°
Efficiency 81 %
Peak intensity 3.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

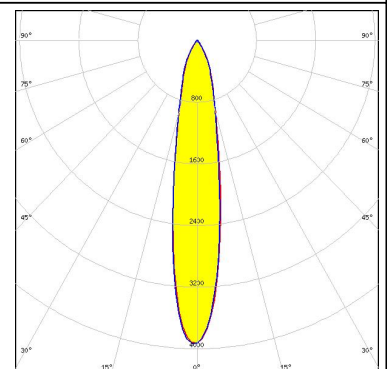

PHOTOMETRIC DATA (MEASURED):
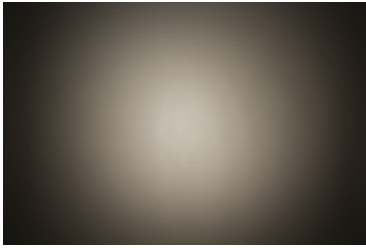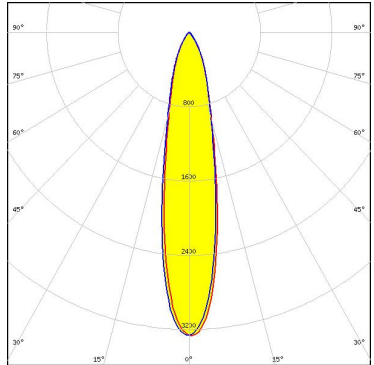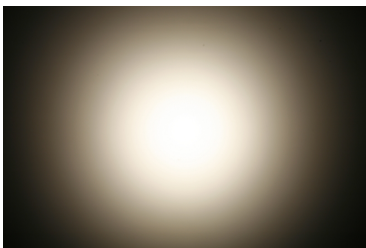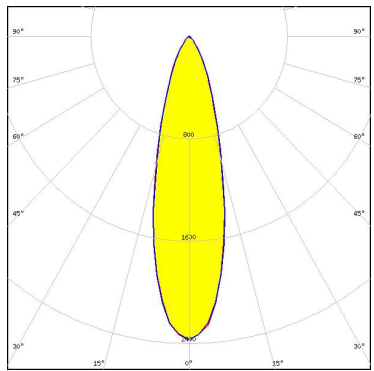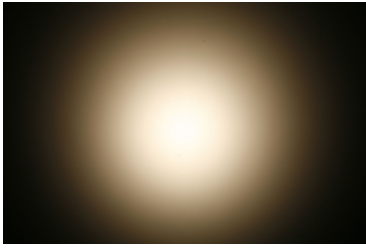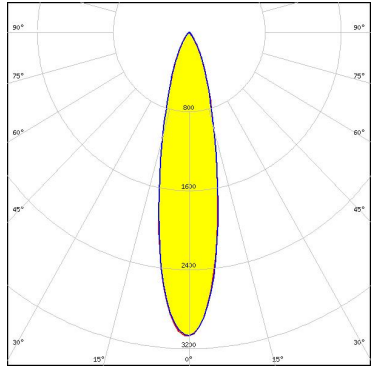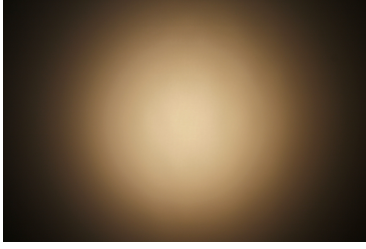
<p>NICHIA</p> <p>LED NFMW48xA FWHM 21.0° Efficiency 82 % Peak intensity 3.300 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NSCxL036A FWHM 28.0° Efficiency 80 % Peak intensity 2.400 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NSMx286M FWHM 23.0° Efficiency 80 % Peak intensity 3.050 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED Duris S10 FWHM 22.0° Efficiency 83 % Peak intensity 3.600 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		


PHOTOMETRIC DATA (SIMULATED):

<p> bridgelux</p> <p>LED VERO10 FWHM 28.9° Efficiency 88 % Peak intensity 2.650 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p> CREE</p> <p>LED MHD-E/G FWHM 30.0° Efficiency 87 % Peak intensity 2.500 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p> LUMILEDS</p> <p>LED LUXEON 5258 FWHM 16.0° Efficiency 92 % Peak intensity 7.300 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p> LUMILEDS</p> <p>LED LUXEON K4 FWHM 26.0° Efficiency 86 % Peak intensity 3.200 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	

PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED OSCONIQ P 7070
FWHM 31.0°
Efficiency 92 %
Peak intensity 2.360 cd/lm
LEDs/each optic 1
Light colour White
Required components:

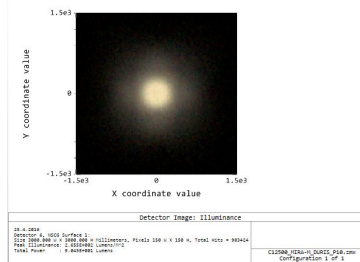

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)