



Datasheet

Part No:
CGGP.18.2.A.02

Description:
GPS/GLONASS/Galileo Dual-Band Ceramic Patch Embedded Antenna

Features:

- Wide-band Operation 1575-1610MHz
- 3.23dBi Peak Gain for GPS/GALILEO Band
- 3.53dBi Peak Gain for GLONASS Band
- Low profile – 2mm Height
- Size: 18x18x2mm
- Through-hole Mounting Pin type
- Automotive TS16949 Production and Quality Approved
- RoHS & REACH Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	5
4. Antenna Radiation Pattern	7
5. Mechanical Drawing	10
6. Evaluation Board	12
7. Packaging	13
<hr/>	
Changelog	14

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The CGGP.18.2.A.02 is a 18mm ceramic GPS/GLONASS/Galileo embedded passive patch antenna, with a 2mm low-profile. It is designed for vehicle telematic applications as well as other M2M/IoT devices. Typical applicable industries are transportation, defense, marine, agriculture, and navigation.

The antenna has been tuned and tested on a 70 x 70 mm ground plane, working at GPS 1575.42MHz and GLONASS 1602MHz, with 3.23dBi gain and 3.53dBi gain, respectively. The low profile design makes this antenna perfect for applications where space is limited. It can be easily through-hole mounted on PCB via pin. Double sided adhesive on the bottom of the patch helps to keep it in place while undergoing mounting. The CGGP.18.2.A.02 is manufactured and tested in a TS16949 first tier automotive approved facility. Like all antennas, at least some detuning will occur when placed in a different device environment or on a different ground-plane.

For large volume GPS/GLONASS/Galileo projects where performance is paramount, tuning for customer specific device environment and ground-plane size is needed, so custom tuned patch antennas should always be used. Taoglas can also provide different pin length for these antennas, all subject to potential NRE and MOQ. For more details please contact your regional Taoglas customer support team.


2. Specifications

Electrical		
Application Bands	GPS/Galileo	GLONASS
Operation Frequency (MHz)	1575.42 ±1.023	1602±5
Return Loss (dB)	-10 max.	
Gain at Zenith (dBi)	3.23	3.53
Efficiency (%)	54.88	59.52
Impedance	50 ohms	
Mechanical		
Ceramic Dimension (mm)	18x18x2	
Pin Diameter (mm)	0.9	
Pin Length (mm)	2.25	
Weight (g)	2.5	
Environmental		
Operation Temperature	-40°C to 85°C	
Moisture Sensitivity	Level 3	


* Antenna properties were measured with the antenna mounted on 70*70mm Ground Plane

3. Antenna Characteristics


3.1 Return Loss

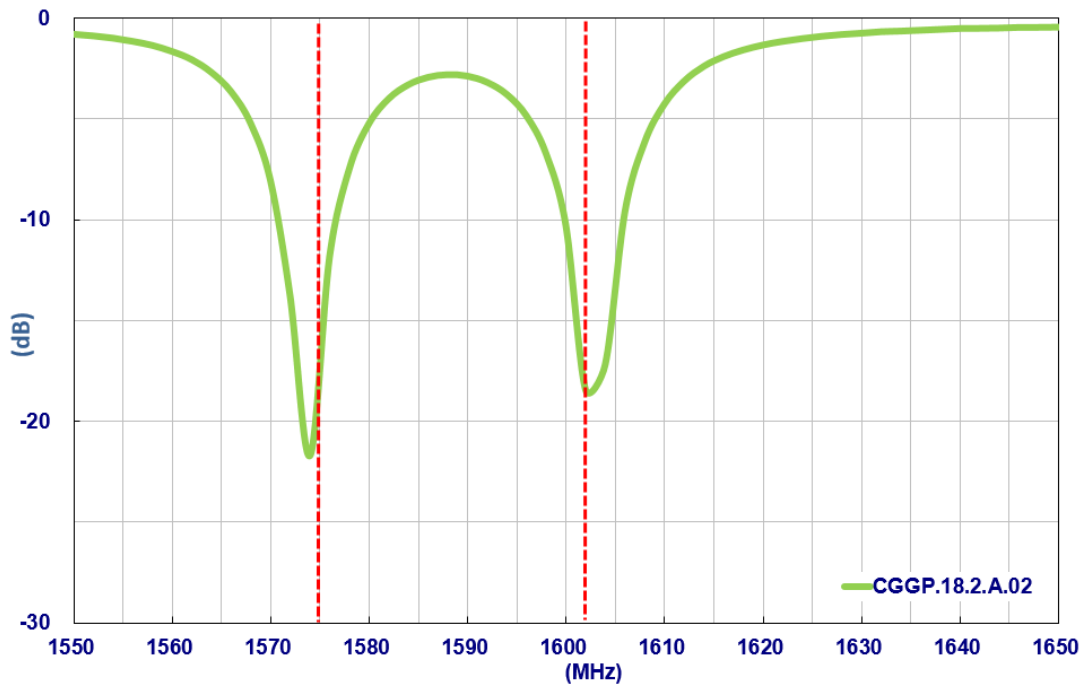


3.2 Efficiency

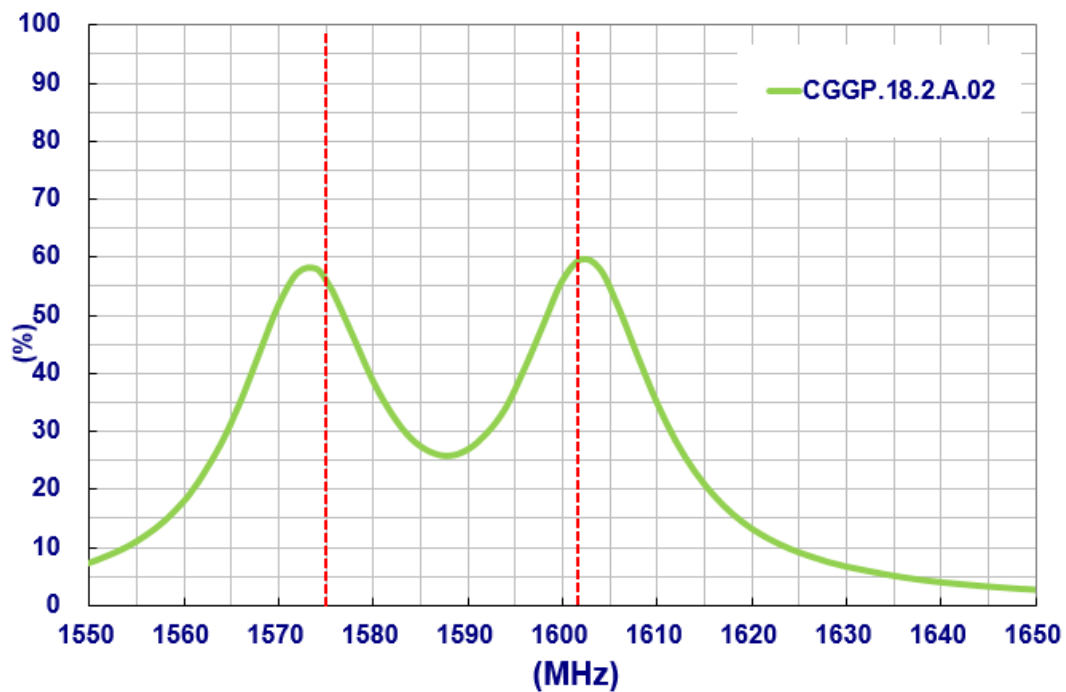

3.3 Average Gain

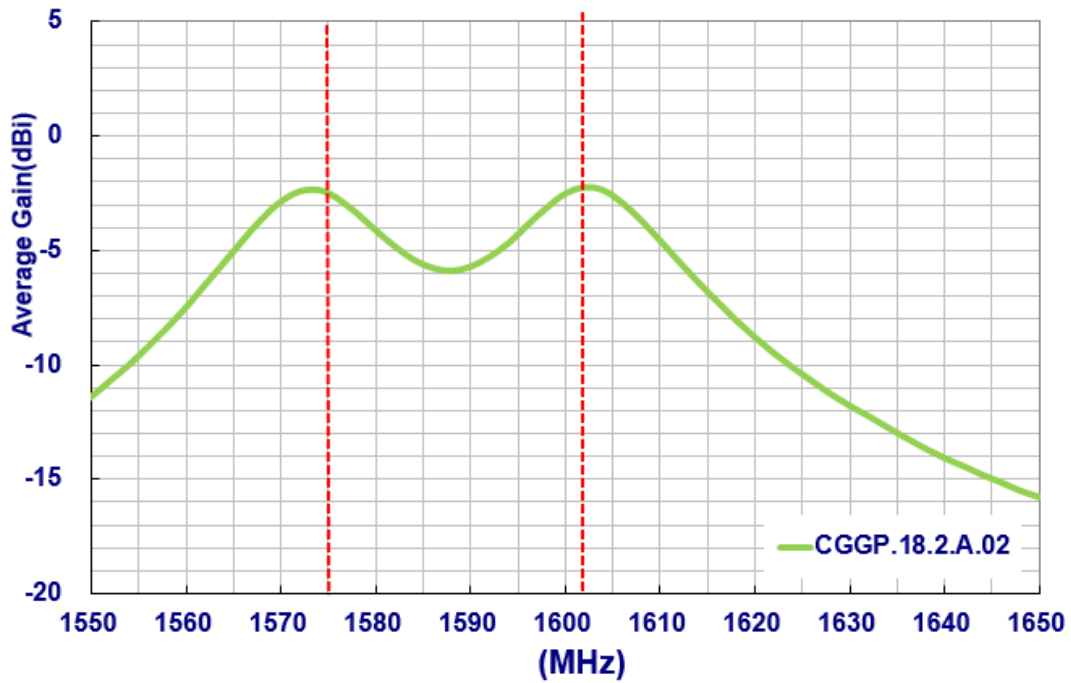


3.4 Peak Gain

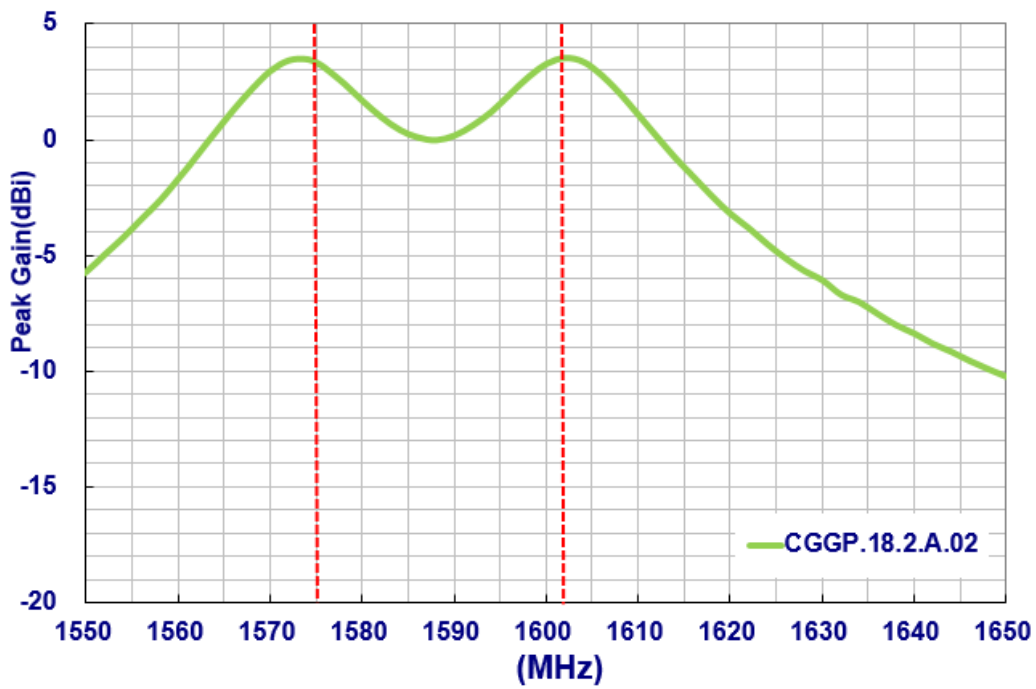

4. Antenna Radiation Pattern


4.1 Measurement Setup

The CGGP.18.2.A.02 antenna is tested in free-space on a 70mm*70mm ground plane in a CTIA certified ETS-Lindgren Anechoic Chamber. The test setup is shown below.

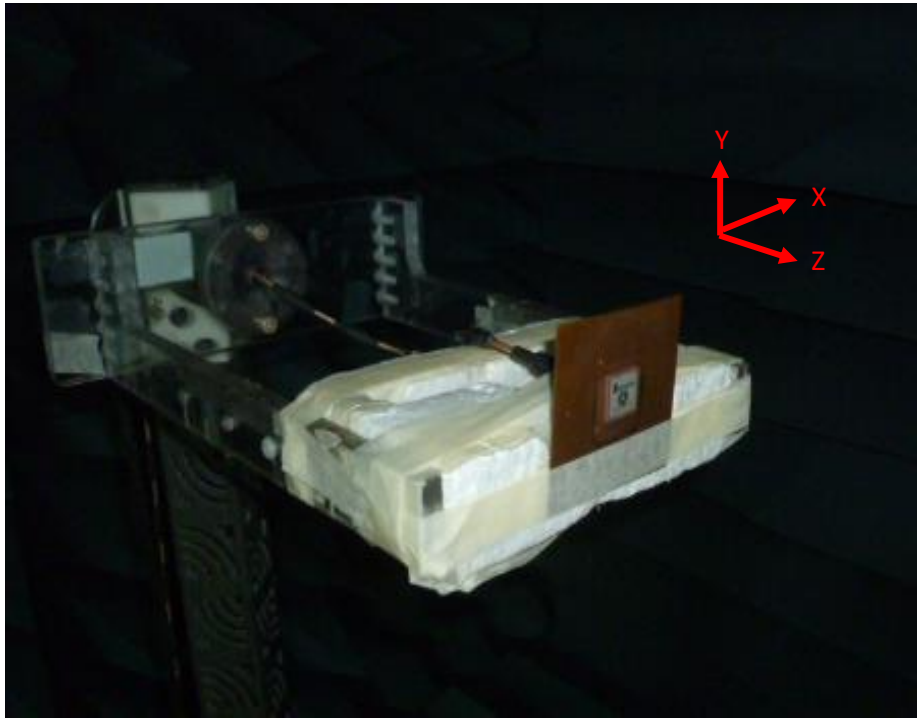


4.2 2D Radiation Pattern


XY Plane

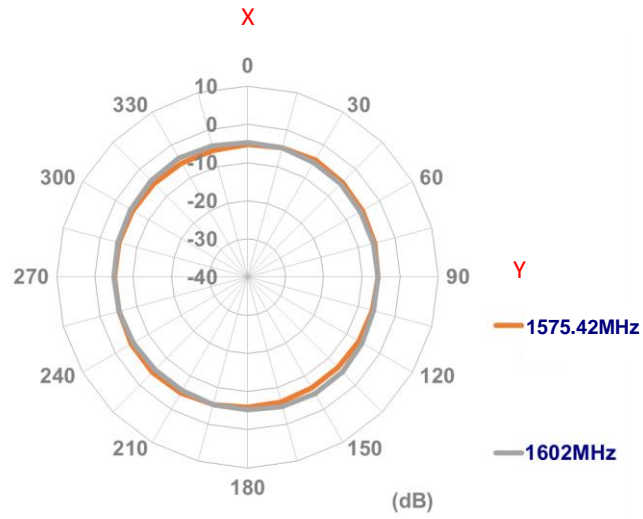


XZ Plane

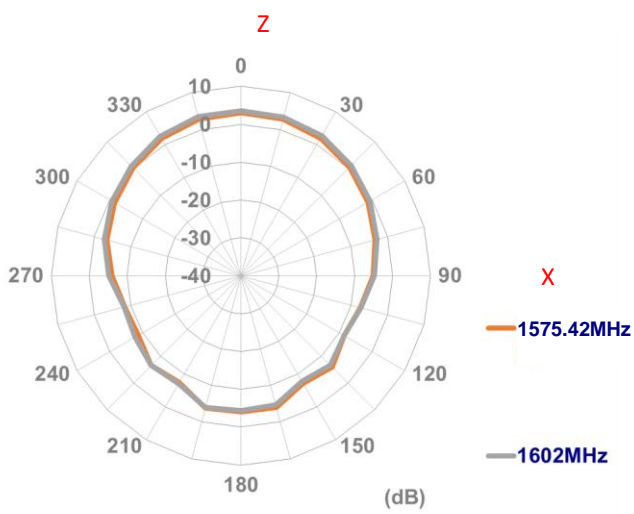


YZ Plane

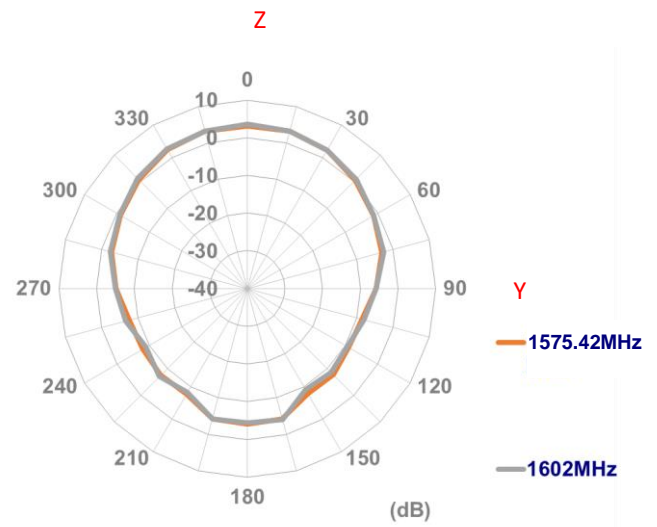

4.3 3D Radiation Pattern

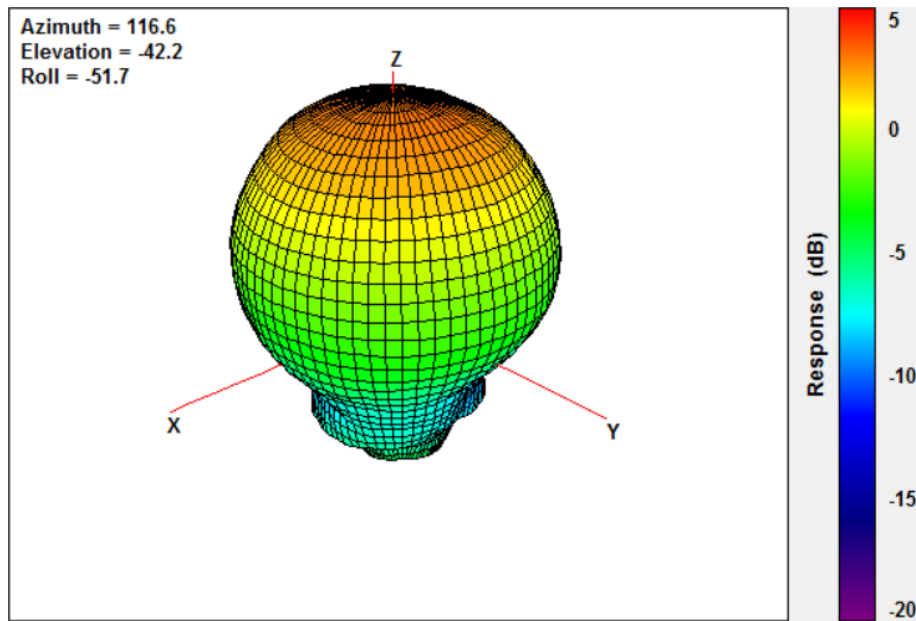


1575.42MHz

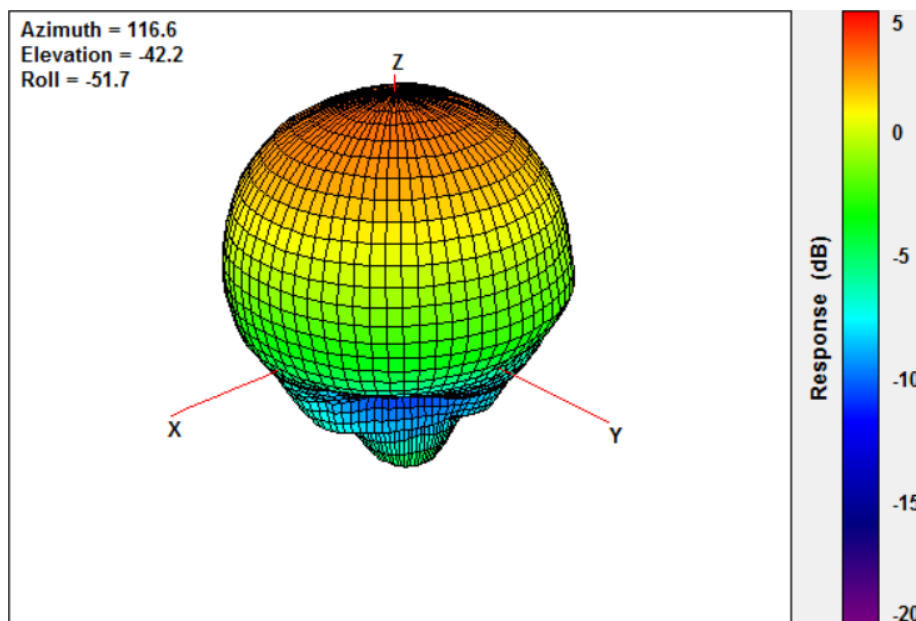


1602MHz

5. Mechanical Drawing (Unit: mm)

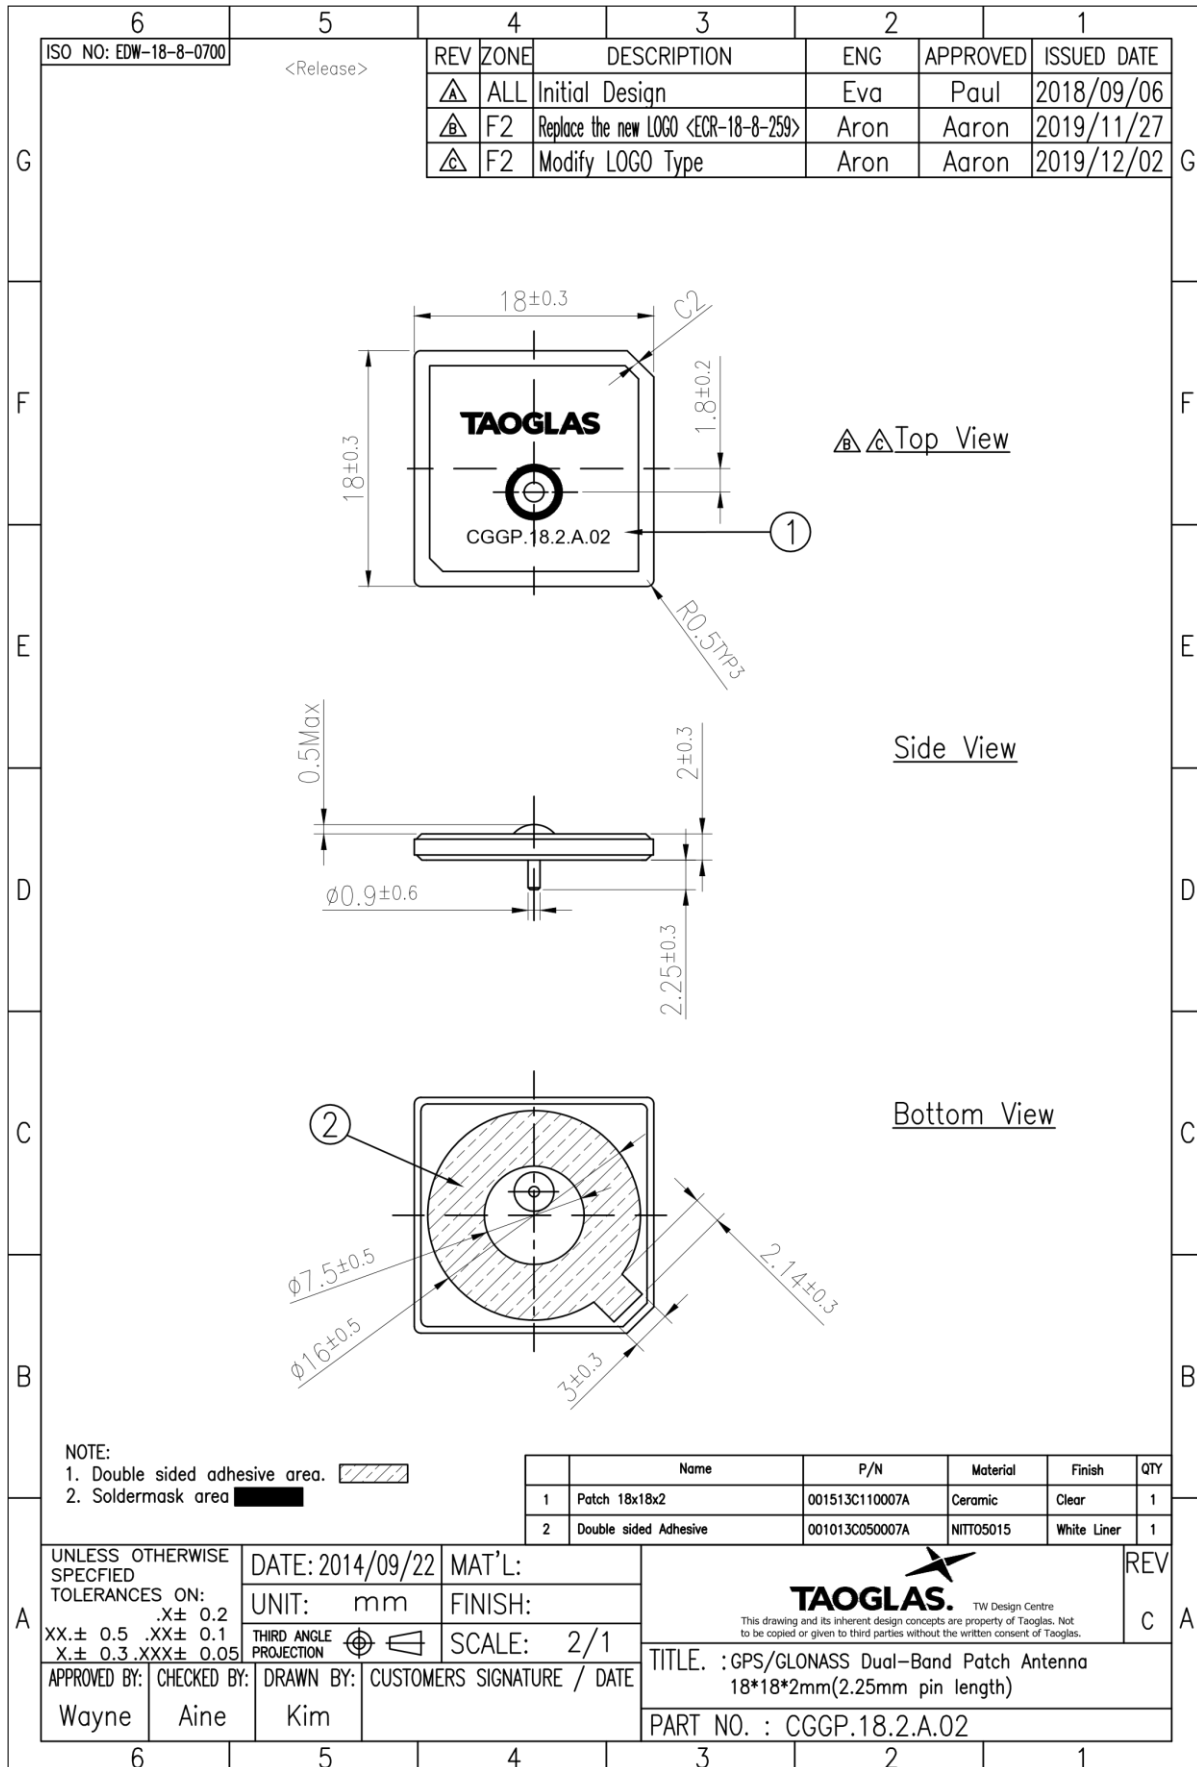


5.1 Adhesive Thickness

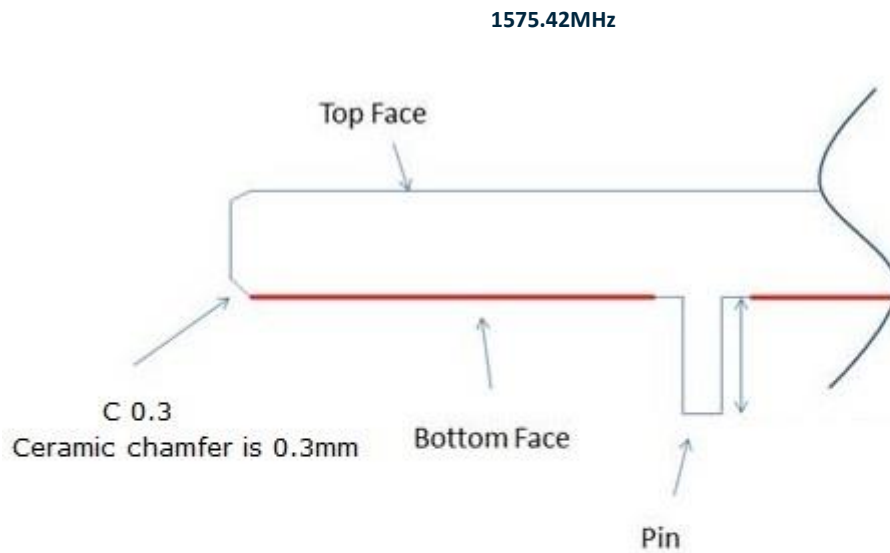

Red Line shows the adhesive without Liner - thickness 0.08~0.1mm

6. Evaluation Board (CGGPD.18.D) (Unit: mm)

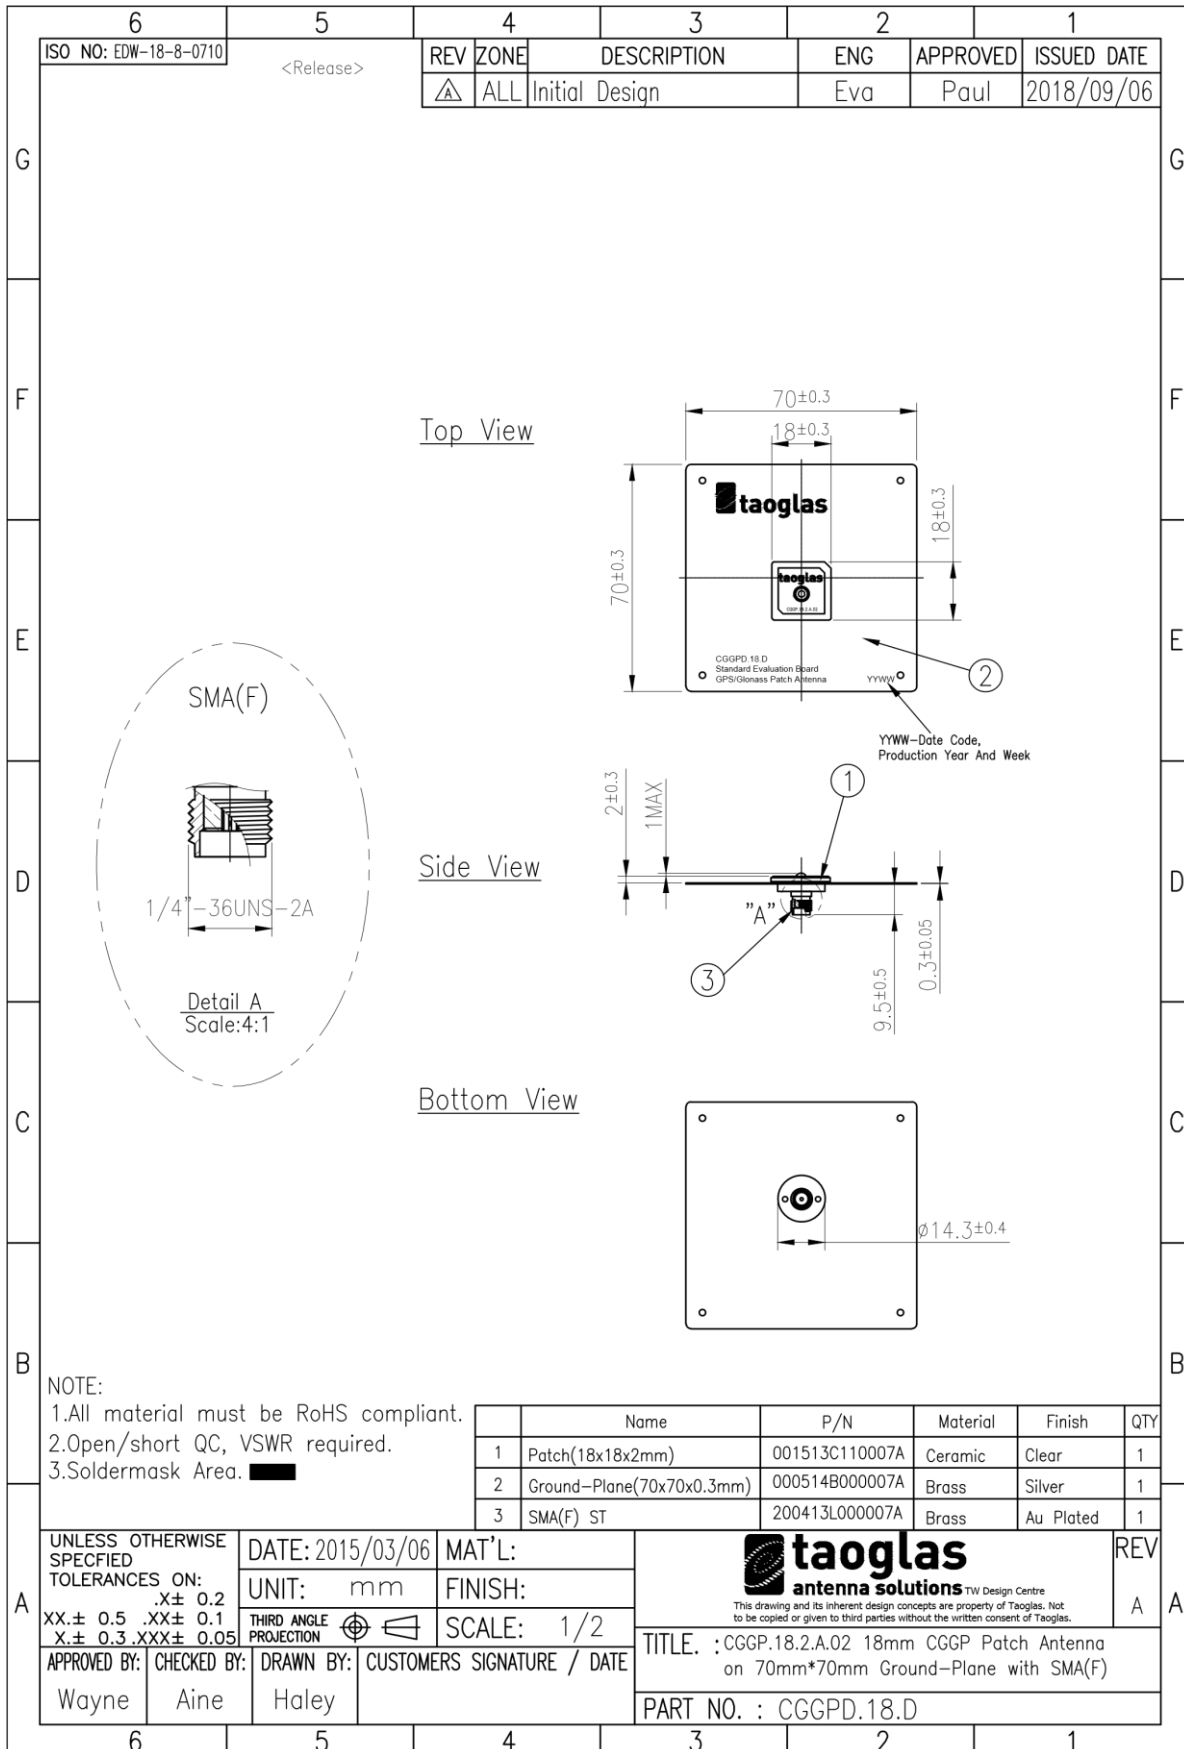


7. Packaging


CGGP.18.2.A.02

Packaging Specifications


25 pcs per tray
 Tray Dimensions - 250*150*11mm

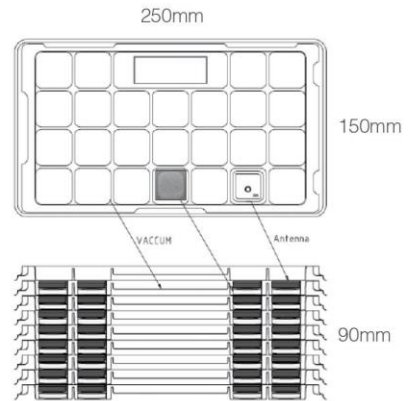


8 Trays per inner box
 200 pcs CGGP.18.2.A.02
 Dimensions - 260*160*100mm

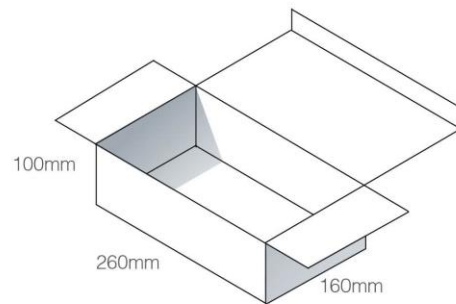

4 inner boxes per outer carton
 800 Pieces CGGP.18.2.A.02 per carton
 Carton Dimensions - 330*280*270mm

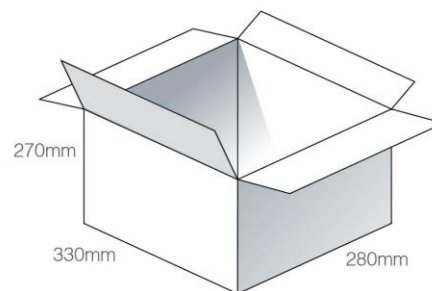

Pallet Dimensions 1100*1100*1500mm
 60 Cartons per Pallet
 12 Cartons per layer
 5 Layers

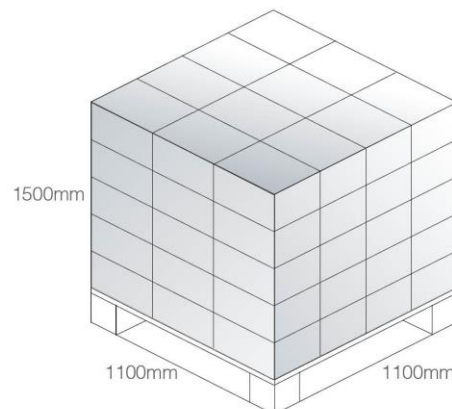

Changelog for the datasheet

SPE-15-8-017– CGGP.18.A.02

Revision: B (Current Version)

Date:	2020-11-19
Changes:	Updated to new format Added Moisture Sensitivity Level 3 to Environmental Specifications
Changes Made by:	Dan Cantwell

Previous Revisions

Revision: A (Original First Release)

Date:	2015-04-11
Notes:	
Author:	Technical Writer



TAOGLAS®

www.taoglas.com

