


Number of contacts

**9–37**

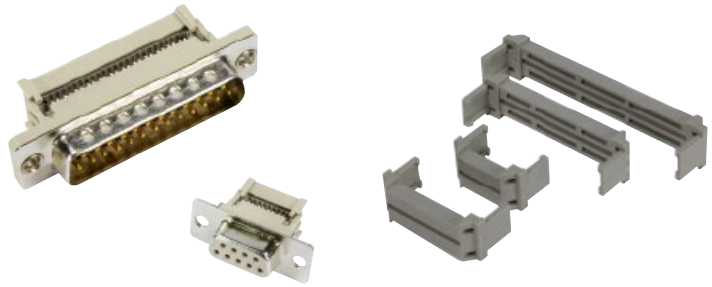

Insulation displacement termination

Identification	No. of contacts	Part number	
		Performance level 3	Performance level 2
<b>Performance levels</b> Explanations see page 05.04 Other performance levels on request			
<b>Male connector<sup>2)</sup></b> pitch 1.27 mm metal shell with dimples	9 15 25 37	09 66 128 770 . 09 66 228 770 . 09 66 328 770 . 09 66 428 770 .	09 66 128 670 . 09 66 228 670 . 09 66 328 670 . 09 66 428 670 .
<b>Female connector</b> pitch 1.27 mm metal shell	9 15 25 37	09 66 118 750 . 09 66 218 750 . 09 66 318 750 . 09 66 418 750 .	09 66 118 650 . 09 66 218 650 . 09 66 318 650 . 09 66 418 650 .
Please insert digit for flange thread  ø 3.1 mm hole ▶ 0 M3 ▶ 1 <sup>1)</sup> 4-40 UNC ▶ 2			
<b>Strain relief clamp</b> plastic for male and female connector	9 15 25 37	09 66 108 0001 09 66 208 0001 09 66 308 0001 09 66 408 0001	09 66 108 0001 09 66 208 0001 09 66 308 0001 09 66 408 0001

1) Not normally kept in stock  
 2) Not released for halogen free flat cables