


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/19/2021	

- NOTES:**
- ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 - MATERIAL:**
 - N MALE CONNECTOR -
 - BODY: BRASS, NICKEL PLT.
 - DIELECTIC: PTFE
 - CENTER CONDUCTOR: BRASS, GOLD PLT.
 - BNC MALE CONNECTOR -
 - BODY: BRASS, NICKEL PLT.
 - DIELECTIC: PTFE
 - CENTER CONDUCTOR: BRASS, GOLD PLT.
 - ELECTRICAL:**
 - IMPEDANCE: 50 Ω
 - FREQUENCY RANGE: DC - 4 GHZ
 - VSWR: 1.20:1 MAX. @ 1 GHZ
 - OPERATING FREQUENCY MAX.: 8 GHZ
 - RF SHIELDING: 90 DB
 - VELOCITY OF PROPAGATION: NOM. 69.2%
 - CAPACITANCE: 96.5 PF/m
 - MECHANICAL:**
 - OPERATING TEMPERATURE: -45°C TO +125°C
 - CABLE BEND RADIUS:
 - REPEATED MIN. - 50.8 mm
 - ONE-TIME MIN. - 25 mm
 - RECOMMENDED CONNECTOR TIGHTEN TORQUE:
 - N : 0.70 - 0.89 NM
 - ROHS 2 COMPLIANT.

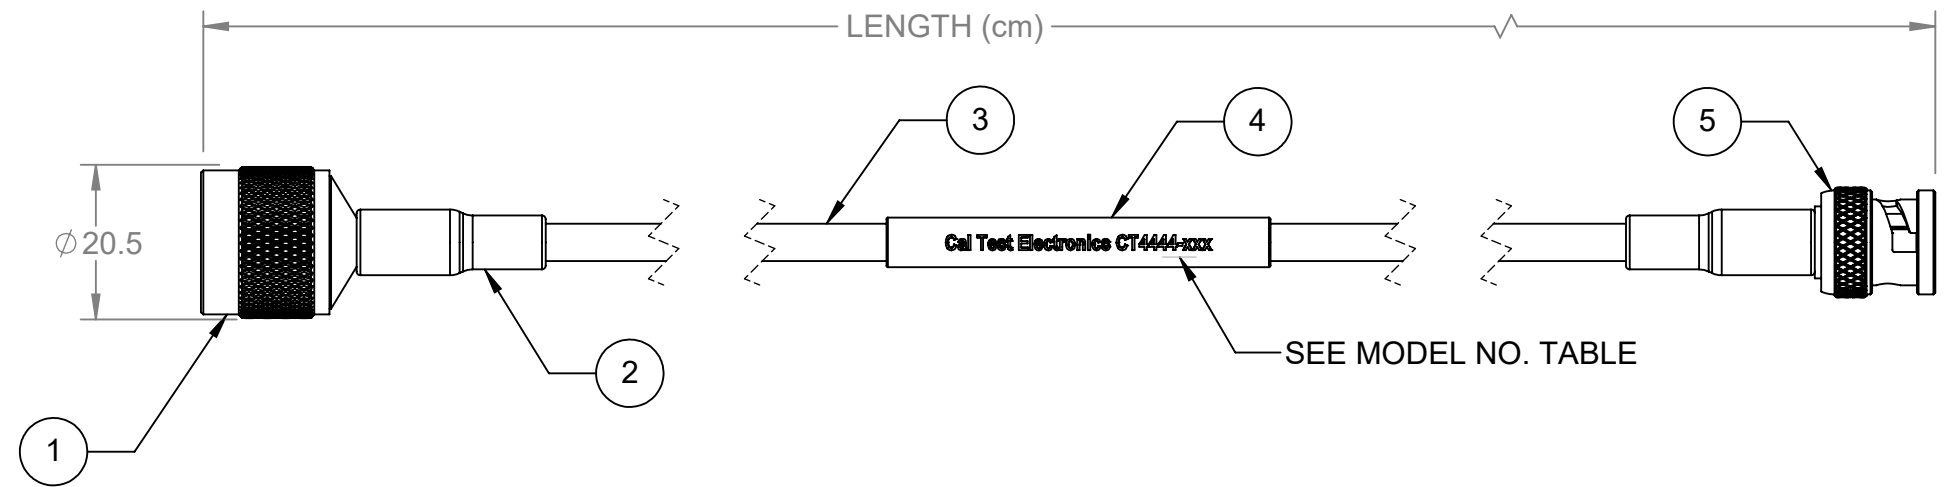


CT4444-100	100 ±1.5	-100
CT4444-60	60 ±1.0	-60
MODEL NUMBER	LENGTH & TOLERANCE IN cm	MODEL NUMBER -XXX EXTENTION

5	BNC MALE CONNECTOR
4	LABEL SLEEVE, BLACK SHRINK TUBING WITH WHITE LETTERING
3	RG142B/U COAXIAL CABLE
2	POLYOLEFIN SHRINK TUBING W/ADHESIVE, BLACK
1	N MALE CONNECTOR
ITEM NO.	DESCRIPTION

METRIC

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: PER DIN ISO 2768m

DO NOT SCALE DRAWING

MATERIAL SEE NOTES

TREATMENT N/A

FINISH SEE NOTES

PROJECT NO. A662	
APPROVALS	DATE
DRAWN WDH	1/19/2021
CHECKER T.Schmidt	1/19/2021
ENGR. B.Hansen	1/19/2021
DESIGN ACTIVITY	

Cal Test Electronics 22820 Savi Ranch Parkway
Yorba Linda, CA 92887

TITLE
RF CABLE ASSEMBLY, N MALE TO BNC MALE, RG142B/U

SIZE B	CAGE CODE 43F45	DWG. NO. P444400	REV. A
------------------	---------------------------	----------------------------	------------------

SCALE 1:1 SHEET 1 OF 1