

# Type LPT-08-3

## “Add-On” Automotive Fuse Holder

### Micro2 Automotive Blade Type Fuse

### Total 3 Circuits



www.optifuse.com (619) 593-5050

For use with Type APT, ANT Fuses (Tiny, Micro2 Automotive Blade)

Rating: 58V

Max Installation Current Rating:

- Existing Circuit: 30A
- Add-on Circuit: 20A


Body Material: Nylon with Glass Fiber (UL 94V-0), Black

Terminals: Brass, Tin plated

Wire: # 16 AWG UL 1015 Red Wire

Connector: Butt-Splice Connector

#### Mechanical Dimensions: Inches [mm]

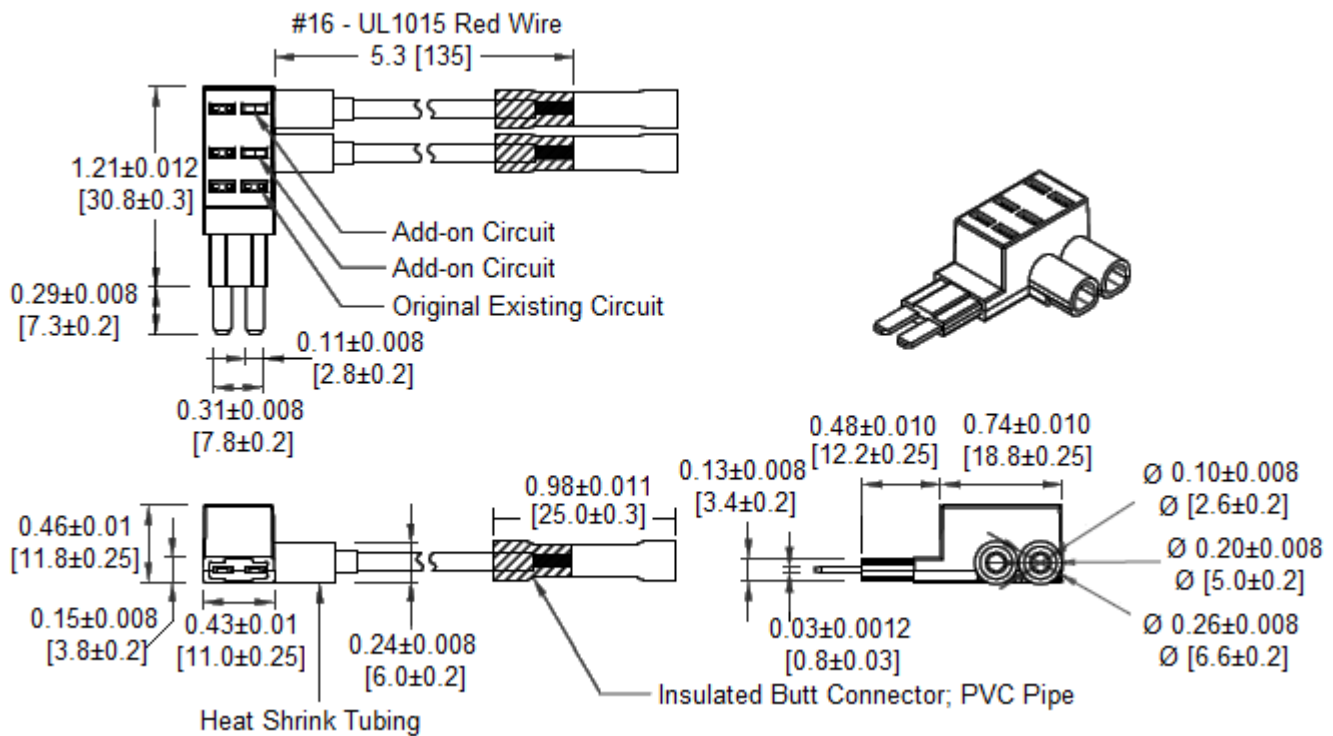

#### Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Device is intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications and dimensions subject to change without notice.

Rev A 07/2017 - Page: 1/1  
Code G02-01H