



(1)

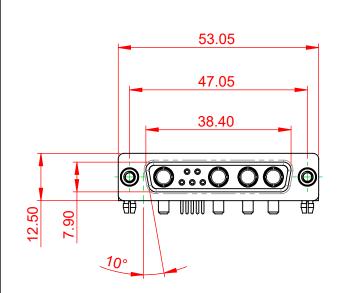




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT: -55°C ~ 125°C

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED



OPERATING TEMPERATURE:	-5


.XX ±0.13

.XXX ±0.05


POWER/CO-AX CONTACT RATING: 20A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:





			SW REFERENCE NO.: 630 COMBO ASSEMBLY		
COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDACI	NC THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
YOUR CONNECTION TO QUALITY & SERVICE	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-9W4	-640-2T5	ISSUE	
	ERVICE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-9W4	-640-2T5	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

