



REV	DATE	ECO#

DRAWING NOT TO SCALE  
ALL DIMENSIONS IN INCHES

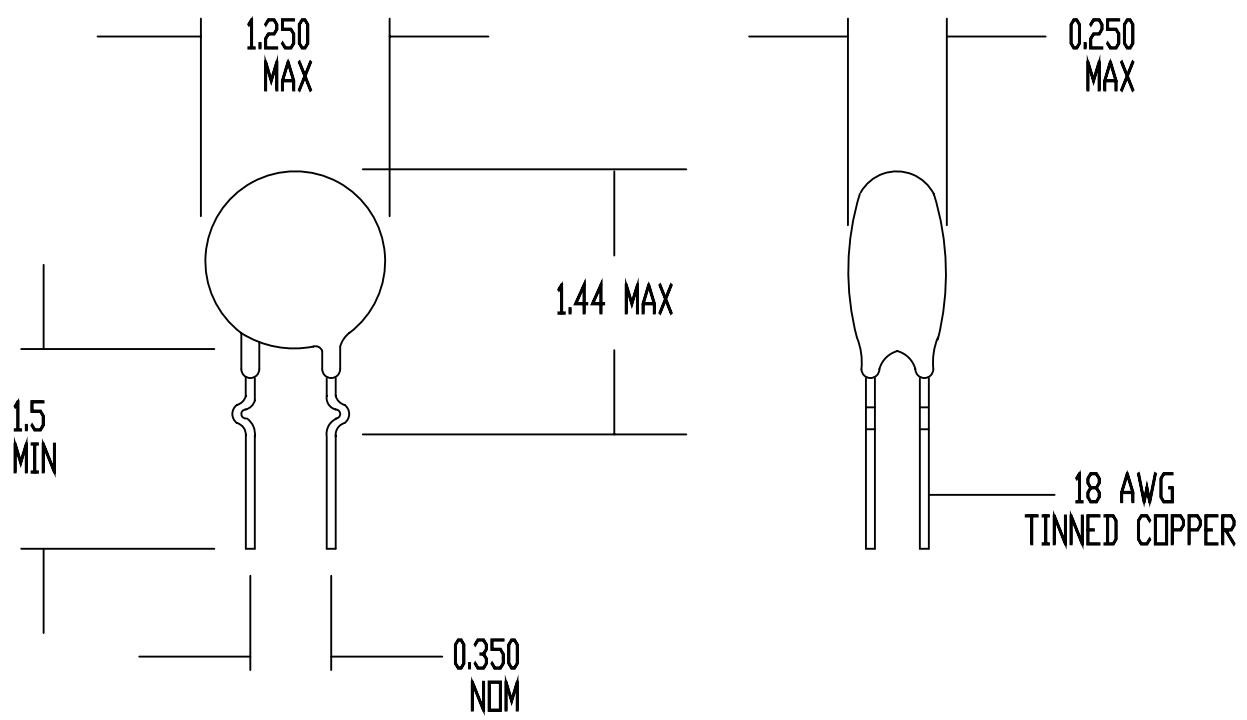

**SPECIFICATIONS:**

RESISTANCE AT 25 DEG C = 1 OHM +/- 25%  
 MAXIMUM CONTINUOUS CURRENT (I<sub>max</sub>) = 30 AMPS  
 RESISTANCE AT I<sub>max</sub> = 0.015 OHMS NOMINAL  
 MAXIMUM VOLTAGE RATING = 265 VAC (RMS)  
 MAXIMUM SURGE RATING = 157 JOULES  
 ENCAPSULATION = SILICONE RESIN  
 MARKING = OPTIONAL  
 LEADS = RODAN P/N STL-209-54 (OR STL-209-35)

DRAWN BY F. TISED		 <b>Circuit Protection Thermistors</b>
DATE 11/11/97	ORIG. B. WILSON	
REV N/C	APP	SURGE-GARD INRUSH CURRENT LIMITER
SHEET 1 OF 1		SG379