

## 20 Watt LD20Wxxx –TL Series

CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS



PHASE DIMMING

**20W**

LD20Wxxx –TL

### Model: LD20W –TL Series

- Designed for use with Triac or ELV Phase Dimmers 120Vac or 230Vac/240Vac.
- 120Vac Version can be used without dimmer 120/208-277Vac
- Drive Mode: PFC Corrected
- Output Power: 20W Max.
- Input Voltage: 120 or 208-277VAC, 50/60Hz
- Number of Outputs: One
- Output Voltages: 7VDC - 57VDC
- Output Currents: 350mA - 1660mA

### Environmental


1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 40°C: 402,000 hours @ Full Load per MIL-217F Notice 2.

### Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety recognized, UL Type HL
2. FCC, 47CFR Part 15 Class B certified.
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp, Wet Locations.
4. Small compact plastic case.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN614000-4-5: 2kV surge protection.

### Electrical Specifications at 25°C

- Input Voltage: 120Vac or 230Vac (208-277Vac)
- Frequency: 50/60HZ
- Power Factor:  $\geq 0.90$  Full Range no dimmer.
- THD:  $\leq 20\%$  Full Range no dimmer
- Inrush current:  $< 10A$  at 25C, 120Vac, cold start, Max. Load
- Input current: 0.17A at 120Vac, 60Hz, Maximum Load
- Efficiency: 83% typical at 120Vac, 60Hz
- Line regulation accuracy:  $\pm 3\%$
- Load regulation accuracy:  $\pm 5\%$
- Dimming Range: CCR Mode See Graph page 2.



IP66



### 120VAC Constant Current Versions

Part Number <sup>(1,2)</sup>	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency <sup>(3)</sup>	DIMMER <sup>(5,6)</sup>
LD20W120-57-C0350-TL	YES	YES	34 - 57 VDC	350mA	$\pm 5\%$	20W	85%	Incan / ELV
LD20W120-43-C0460-TL	YES	YES	26 - 43 VDC	460mA	$\pm 5\%$	20W	85%	Incan / ELV
LD20W120-40-C0500-TL	YES	YES	24 - 40 VDC	500mA	$\pm 5\%$	20W	85%	Incan / ELV
LD20W120-36-C0550-TL	YES	YES	22 - 36 VDC	550 mA	$\pm 5\%$	20W	83%	Incan / ELV
LD20W120-28-C0700-TL	YES	YES	17 - 28 VDC	700 mA	$\pm 5\%$	20W	82%	Incan / ELV
LD20W120-24-C0830-TL	YES	YES	14 - 24 VDC	830 mA	$\pm 5\%$	20W	82%	Incan / ELV
LD20W120-18-C1100-TL	YES	YES	11 - 18 VDC	1100 mA	$\pm 5\%$	20W	81%	Incan / ELV
LD20W120-12-C1660-TL	YES	YES	7 - 12 VDC	1660 mA	$\pm 5\%$	20W	80%	Incan / ELV

### 208-277VAC Constant Current Versions

1. For 220/230/240/277Vac version Change Part designator to: LD20W230-XX-CXXXX-TL
2. LD20W120, 120Vac Version can be used without dimmer at 120Vac or 208-277Vac.

### Notes

3. Typical efficiency for LD20W120 measured at 120Vac, LD20W230 measured at 230Vac input, full load, no dimmer.
4. All versions are  $\sim \leq 15\%$  to  $\sim 100\%$  CCR Dimmable with any good quality proper power phase dimmer. Refer to page 2
5. For LD20W120 use any good quality 120VAC  $\leq 600W$  Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.
6. For LD20W230 use any good quality 230Vac  $\leq 500W$  Incandescent (Triac) or ELV (Electronic Low Voltage) dimmer. Refer to page 2.
7. LD20W230 version will also work with 277Vac phase dimmers but loading must meet minimum requirements of dimmer being used.

20W

LD20Wxxx -TL

PHASE DIMMING




LED Optimized Drivers  
Triac & ELV Dimmable

# 20 Watt LD20Wxxx -TL Series

CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

## Typical Dimming Curves:



%Output Current vs. Conduction Angle in Degrees

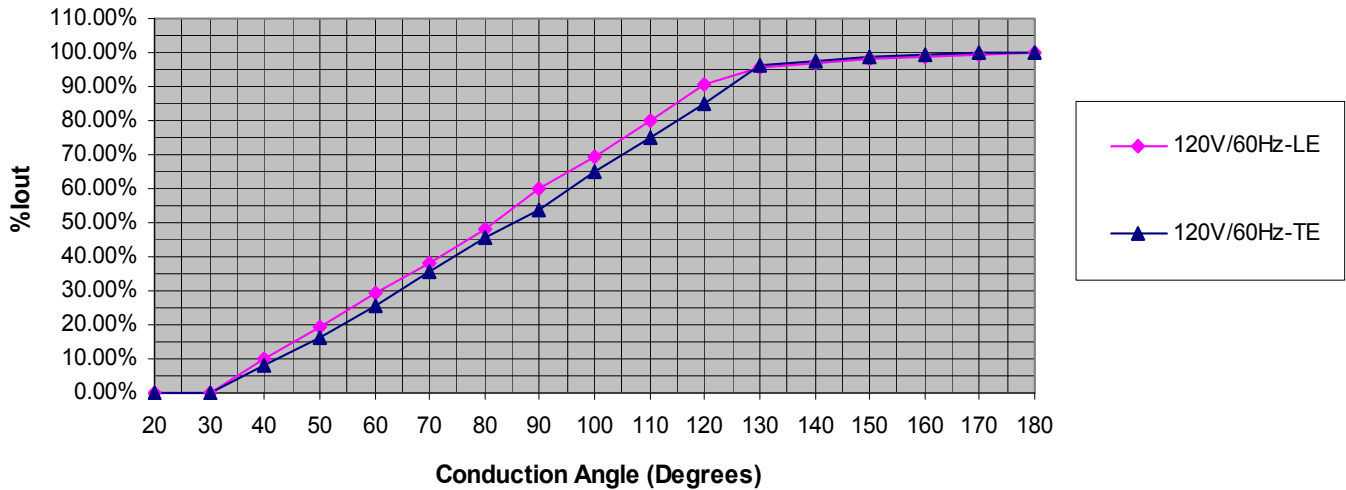

## Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case  
Fully Encapsulated  
Weight: 165 grams (5.8 oz) Typical

## Labeling Example

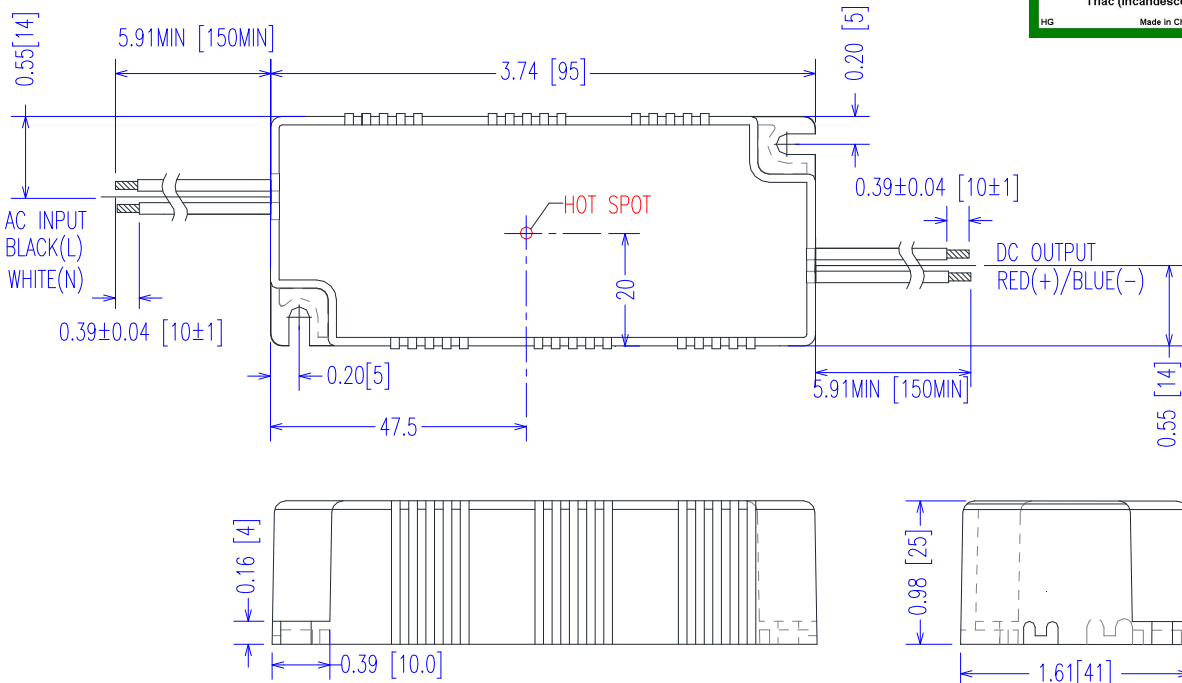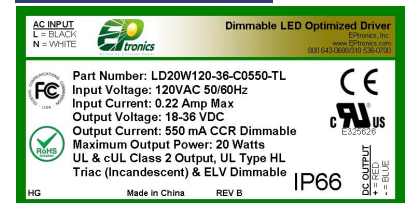

## 20 Watt LD20Wxxx –TL Series

CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

### Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage full range	108 Vac	120 Vac	132 Vac	120 Vac Nominal Value Note: LD20W120, 120Vac Version can be used without dimmer at 120Vac or 208-277Vac
	208Vac	230Vac	300Vac	230Vac Nominal Value (220/230/240/277)
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.22 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.17 A	Measured at 230Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	2A	10A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% Ipeak duration $\approx$ 750 $\mu$ sec ( $1/2 \cdot I_p^2 \cdot t$ )
Inrush Current ( $I^2t$ )	—	—	0.038 A <sup>2</sup> s	
Leakage Current	—	—	0.28mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75mA	Measured at 277vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at 120 or 230Vac Input, Output $\geq$ 60% Load, No Dimmer
Power Factor (PF)	0.90	—	—	Measured at 120 or 230Vac Input, Output $\geq$ 60% Load, No Dimmer

### Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 1
DC Output Constant Current	-5%	Per Table	+5%	Per Tables on Page 1
Output Power	—	—	Per Table	Per Tables on Page 1
Ripple & Noise (Vpk-pk)	—	—	10%	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic.
Ripple (Ipk-pk)	—	—	55%	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic. 120 Hz component
Start-up Time	—	700 mS	1000 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	30 mS	—	Typical @ 120/277Vac Input, Output Full load.

### Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (Tc)	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (Ta)	-30 °C	—	+60 °C	This is a reference range. Tc controls temperature range.
Storage Temperature (Ts)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	402,000 Hours	—	—	MIL-HDBK-217F Notice 2, Ta = 25C, Output Full Load.

### Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% Io	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% Vo	No Damage, Auto recovery after fault is removed.


**20W****LD20Wxxx –TL****PHASE DIMMING**
**LED Optimized Drivers  
Triac & ELV Dimmable**
**20 Watt LD20Wxxx –TL Series**  
 CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

**Safety Compliance**


Safety	Notes/Standards
UL/CUL	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
Dimming Circuit	AC Phase Dimmable. Incandescent Forward Phase or ELV reverse phase.

**EMC Compliance**


Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

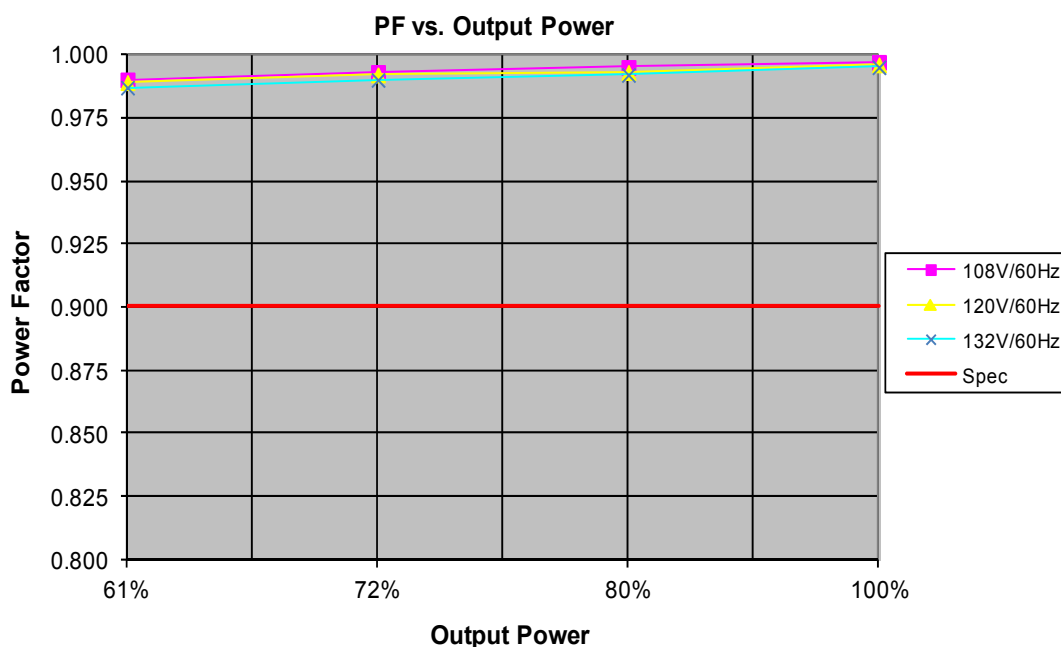**Power Factor Curves (Typical) - Direct Connect to AC (No Dimmer)**


**THD Curves (Typical) - Direct Connect to AC (No Dimmer)**

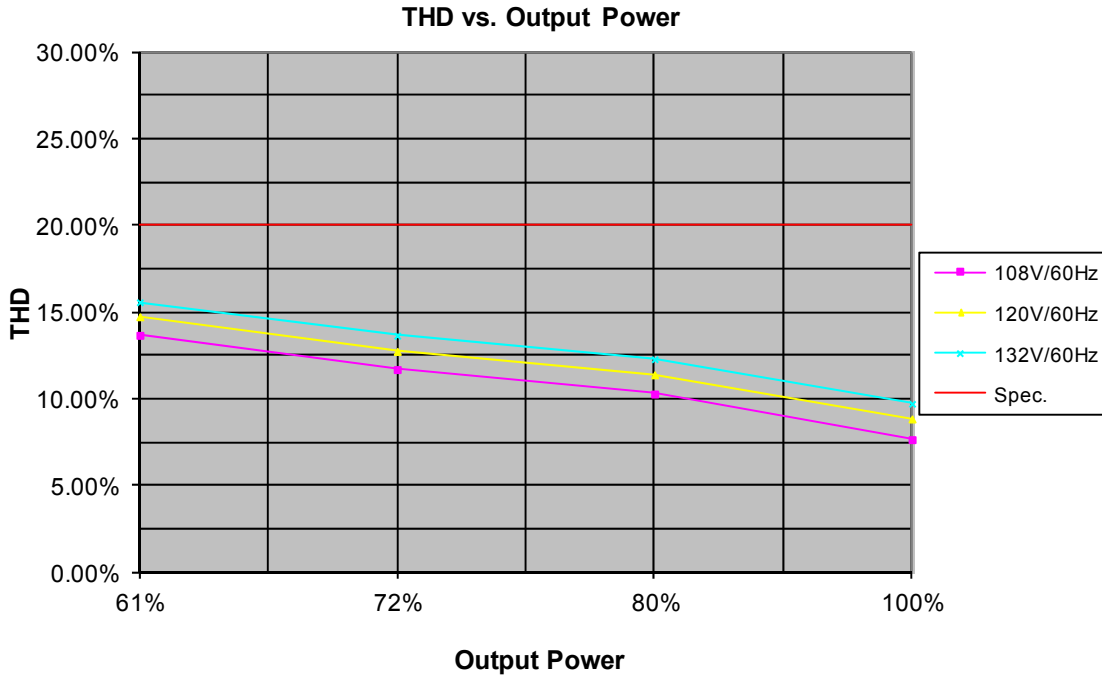

**Efficiency Curve (Typical) - Direct Connect to AC (No Dimmer)**

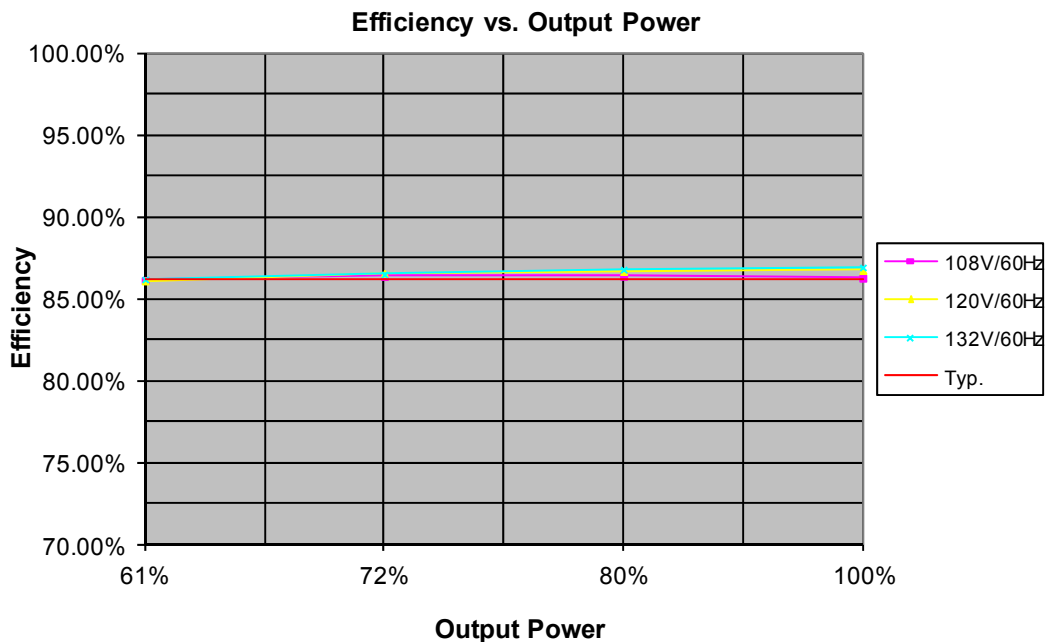

20W

LD20Wxxx -TL

PHASE DIMMING




LED Optimized Drivers  
Triac & ELV Dimmable

## 20 Watt LD20Wxxx -TL Series

CONSTANT CURRENT TRIAC/ELV DIMMABLE LED DRIVERS

### Life vs. Ambient Temperature

LD20W Estimated Life Full Load @ 120Vac

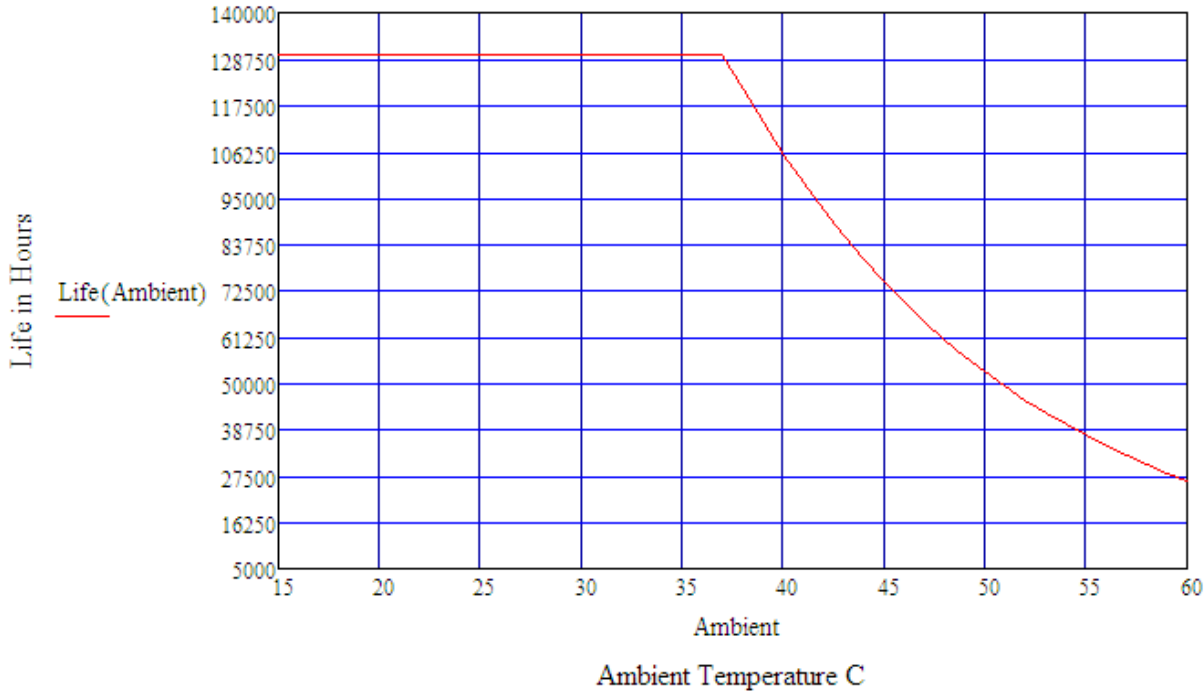

### Life vs. Case (Tc) Temperature

LD20W Estimated Life Full Load @ 120Vac

