

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

Material

Terminal body(contact pin): Brass with Tin plated
 Insulator (housing): Thermoplastic (UL94V-0),Green

Electrical cULus

Voltage rating: 300VAC

Current rating: 10A

Wire range:



Solid wire(AWG):

Stranded wire (AWG):


Withstanding Voltage: 1.6KV

Operating temperature: -30°C to +105°C


Soldering temperature: 250°C±10°C/5 Sec

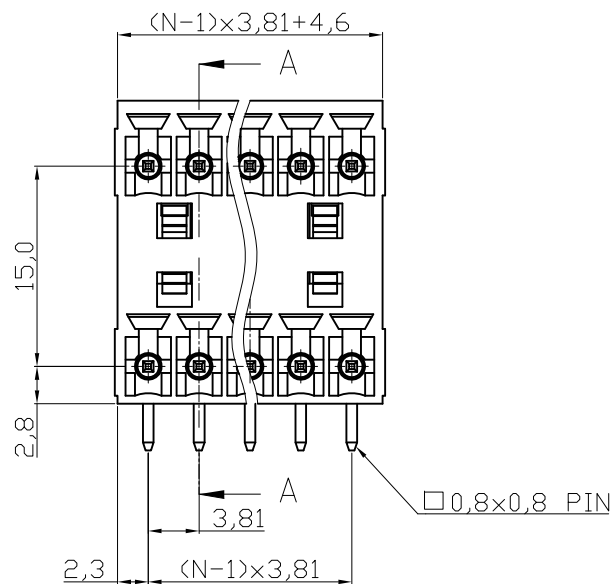Safety Approval: 

N= NUMBER OF CONTACTS

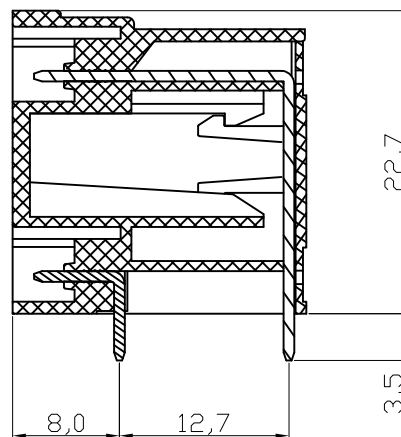


SECTION A-A

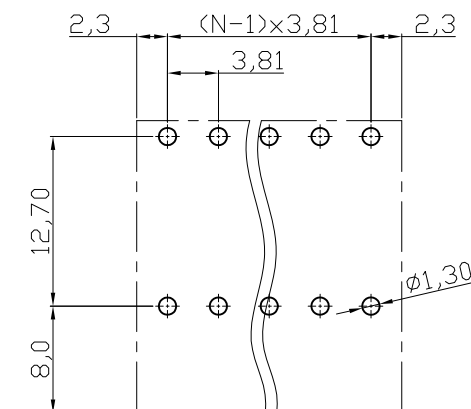

PCB LAYOUT

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	10.12.2009	Dean	
X.	±0.50					Approved	10.12.2009	Hellwig	ASSMANN WSW-No. A-TB381-VLxxH
X.X	±0.30								Drawing-No.
X.XX	±0.10								ASS 3842 CO
DIM	TOL								rev01
X.°	±1°								
		①	Drawn	10.12.2009	Dean			Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name				

1

2

3

4

5

6

7