

zeus[®]
Power-cell Battery Products, LLC



Why Choose Zeus?

POWER YOUR WORLD. It's more than just our slogan... it's our commitment to ensure that our ZEUS products feature the latest technology and provide the highest quality for longer life at competitive pricing. It is through our technical customer service team that we can assist our regional and national distributors with cross references, pricing and availability. Our headquarters & main distribution center is located in Illinois. We are continuing to add stocking locations throughout the USA to be able to provide quick turn on your battery orders.

Try ZEUS for:

- Case, Pallet or Truckload for volume discount opportunities
- Rebate Opportunities / Co-Op Marketing
- Point of Purchase Displays for Alkaline and Sealed Lead Acid Batteries
- Private Label & Custom Packaging available upon request
- Will call pick up for local customers
- Custom Battery Assemblies *(contact customer service for details)*
- Re-Order Labeling with your company info to allow repeat orders to your distribution locations

ALKALINE BATTERIES

WHY PAY MORE WHEN YOU CAN POWER WITH ZEUS?

Independently tested and proven quality to be comparable to the leading competitive brands.

Longest-lasting
(Mercury & Cadmium Free)

Ideal for digital products and handheld devices

3-5 Year Shelf Life



Model #	Nominal (V)	Nominal (Ah)	Qty Inner Carton	Qty Master Carton
AA	1.5	2.1	40	720
AAA	1.5	1	40	720
C	1.5	5.5	12	144
D	1.5	10	12	96
9V	9	0.5	10	360

LITHIUM BATTERIES



ADVANTAGES OF LITHIUM?

- 7X longer lasting
- High Energy Density
- High Voltage
- Excellent Stability
- Environmentally Friendly



Model #	Nominal (V)	Nominal (Ah)	Packaging
ER14505	3.6	2400	Tray of 20
CR-2	3	800	Tray of 50
CR-123A	3	1300	Tray of 50
CR2025	3	150	Carded (5 per)
CR2032	3	210	Carded (5 per)
CR2450	3	600	Carded (5 per)

SEALED LEAD ACID (SLA) BATTERIES



F1		FAST-ON 0.187" X 0.032" quick disconnect tabs
F2		FAST-ON 0.250" X 0.032" quick disconnect tabs
FP		FAST-ON POLARIZED Positive: "F2 " Negative: "F1"

NB		TERMINAL POSTS With nut & bolt connectors
----	--	---

Adapters available to convert F1 & F2



File No: MH29008



from date of purchase

SLA Batteries from ZEUS offer the following benefits:

Maintenance Free

- Valve regulated
- Electrolyte is absorbed into positive and negative plates and separator
- No need to add electrolyte

Life Expectancy

- Lasts up to 5 years in stand-by applications
- 200 to 1,000 cycles in cyclic applications depending on depth of discharge

Design

- Wide variety of sizes and amp ratings
- Maximum flexibility in design
- Pack assembly, stand alone, stand-by and cyclic applications

Shelf Life and Storage

- Stored in fully-charged condition
- Top charge every 6 months in ambient temps to prevent permanent loss of capacity
- Store at temperatures less than 50F and 10 C or lower to extend shelf life

PRODUCT GUIDE

GENERAL PURPOSE SEALED LEAD ACID

Model	Voltage (V)	Amp Hour* (Ah)	Initial Current (A)	Length IN (MM)	Width IN (MM)	Height IN (MM)	Height over Terminals	Approximate Weight (kg)	Approximate Weight (lb)	Standard Terminal
PC1.3-6	6	1.3	0.39	3.82 (97.0)	0.94 (24.0)	2.05 (52.0)	2.28 (58.0)	0.300	0.66	F1
PC3.4-6	6	3.4	1.00	5.28 (134.0)	1.34 (34.0)	2.43 (61.6)	2.66 (67.6)	0.630	1.39	F1
PC4.5-6	6	4.5	1.35	2.76 (70.0)	1.85 (47.0)	4.09 (104.0)	4.15 (105.5)	0.800	1.76	F1
PC5-6	6	5	1.50	2.76 (70.0)	1.85 (47.0)	4.09 (104.0)	4.15 (105.5)	0.81	1.79	F1
PC7-6	6	7	2.10	5.94 (151.0)	1.34 (34.0)	4.37 (111.0)	4.61 (117.0)	1.100	2.43	F1
PC12-6	6	12	3.60	5.94 (151.0)	1.97 (50.0)	3.70 (94.0)	3.94(100.0)	1.700	3.75	F1
PC12-6TFP	6	12	3.60	4.25 (108.0)	2.79 (71.0)	5.51 (140.0)	5.51 (140.0)	2.130	4.70	FP
PC1.3-12	12	1.3	0.36	3.82 (97.0)	1.69 (43.0)	2.05 (52.0)	2.28 (58.5)	0.570	1.26	F1
PC3.4-12	12	3.4	1.00	5.25 (133.3)	2.63 (66.8)	2.40 (61.0)	2.64 (67.0)	1.350	2.98	F1
PC4.5-12	12	4.5	1.35	3.54 (90.0)	2.76 (70.0)	3.98 (101.0)	4.21 (107.0)	1.450	3.20	F1
PC5-12	12	5	1.50	3.54 (90.0)	2.76 (70.0)	3.98 (101.0)	4.21 (107.0)	1.600	3.53	F1 OR F2
PC7-12	12	7	2.10	5.94 (151.0)	2.56 (65.0)	3.70 (94.0)	3.94 (100)	2.060	4.54	F1 OR F2
PC7.2-12	12	7.2	2.16	5.94 (151.0)	2.56 (65.0)	3.70 (94.0)	3.94 (100)	2.200	4.85	F1 OR F2
PC9-12S	12	9	2.70	5.94 (151.0)	2.56 (65.0)	3.70 (94.0)	3.94 (100)	2.550	5.62	F1 OR F2
PC9-12	12	9	2.70	5.94 (151.0)	2.56 (65.0)	4.37 (111.0)	4.57 (116)	2.550	5.62	F2
PC12-12	12	12	4.80	5.94 (151.0)	3.86 (98.1)	3.74 (94.9)	3.97 (100.9)	3.500	7.72	F2
PC18-12	12	18	5.40	7.13 (181.0)	3.03 (77.0)	6.57 (167)	6.57 (167.0)	5.300	11.68	NB (m5)
PC22-12	12	22	6.60	7.13 (181.0)	3.03 (77.0)	6.57 (167.0)	6.57 (167.0)	6.300	13.89	NB (m5)
PC26-12	12	26	7.80	6.89 (175.0)	6.54 (166.0)	4.94 (125.6)	4.94 (125.6)	7.250	15.98	NB (m5)
PC33-12	12	33	8.25	7.72 (196.0)	5.16 (131)	6.14 (156.0)	7.09 (180.0)	10.500	23.15	NB (m8)
PC40-12	12	40	10.00	7.76 (197.0)	6.50 (165.0)	6.73 (171.0)	6.73 (171.0)	12.500	27.56	NB (m6)
PC55-12	12	55	13.00	8.98 (228.0)	5.39 (137.0)	8.27 (210.0)	9.02 (229.0)	16.500	36.38	NB (m6)
PC70-12	12	70	17.50	10.20 (260.0)	6.61 (168.0)	8.19 (208.0)	8.90 (226.0)	21.600	47.62	NB (m6)
PC100-12	12	100	25.00	12.99 (329.0)	6.77 (173.0)	8.54 (220.0)	8.94 (245.0)	28.300	62.39	NB (m8)

EMERGENCY LIGHTING (XB) LEAD ACID

PC4.5-6XB	6	4.5	1.2	2.76 (70.0)	1.85 (47.0)	3.94 (100.0)	4.09 (104.0)	0.690	1.520	F1
PC12-6XB	6	12	3.6	5.94 (151.0)	1.97 (50.0)	3.70 (94.0)	3.94 (100.0)	1.500	3.310	F1
PC5-12XB	12	5	1.5	3.54 (90.0)	2.76 (70.0)	3.98 (101.0)	4.21 (107.0)	1.430	3.150	F1

* Amp Hour is based on a 20 hour rate. Initial Current is the maximum allowed charge rate.

CHARGER GUIDE FOR SEALED LEAD ACID BATTERIES

FOR USE WITH BATTERY

Model	Description	Capacity	Voltage	Contacts	Input (V)	LED Indicator
PCCG-SLA6V300	6V .3A 3 STAGE	1Ah - 6Ah	6	Alligator Clips	120 vac	Yes
PCCG-SLA6V1200	6V 1.2A 3 STAGE	4.2Ah - 22Ah	6	Alligator Clips	120 vac	Yes
PCCG-SLA12V300	12V .3A 3 STAGE	1Ah - 6Ah	12	Alligator Clips	120 vac	Yes
PCCG-SLA12V1800	12V 1.8AH 3 STAGE	7Ah-33Ah	12	Alligator Clips	120 vac	Yes
PCCG-SLA12V5000	12V 5AH 3 STAGE	17Ah-95Ah	12	Alligator Clips	120 vac	Yes

CROSS REFERENCE GUIDE

ZEUS Catalog Number	Description	Interstate Battery Catalog Number	Power-Sonic Catalog Number	Universal Power Group Catalog Number	Yuasa Catalog Number
PC1.3-6F1	6V 1.3AH BATTERY	SLA0865	PS-612	UB613	NP1.2-6
PC3.4-6F1	6V 3.4AH BATTERY	SLA0885	PS-630	UB634	NP3-6
PC4.5-6F1	6V 4.5AH BATTERY	SLA0905	PS-640	UB640	NP4-6 / NP4.5-6
PC4.5-6XB F1	6V 4.5AH BATTERY	SEC0905	PS-640	UB640	NP4-6 / NP4.5-6
PC7-6F1	6V 7AH BATTERY	SLA0925	PS-670	UB670	NP7-6
PC12-6F1	6V 12AH BATTERY	SLA0961	PS-6100	UB6100	NP10-6
PC12-6XBF1	6V 12AH BATTERY	SLA0955	PS-6100	UB6100	NP10-6
PC12-6TFP	6V 12AH BATTERY	SLA0975	PS-6120FP	NA	NA
PC1.3-12F1	12V 1.3AH BATTERY	SLA1005	PS-1212	UB1213	NP1.2-12
PC3.4-12F1	12V 3.4AH BATTERY	SLA1035	PS-1230	UB1234	NA
PC5-12F1	12V 5AH BATTERY	SLA1050	PS-1250	UB1250A	NP4-12 / NP5-12
PC7-12F1	12V 7AH BATTERY	SLA0124	PS-1270	UB1270	NP7-12
PC7-12F2	12V 7AH BATTERY	SLA0124	PS-1270	UB1270	NP7-12-250
PC7.2-12F2	12V 7.2AH BATTERY	SLA1075	PS-1270	NA	NP7.5-12-250
PC9-12S F1	12V 9AH BATTERY	SLA1079	PS-1290	NA	NA
PC9-12S F2	12V 9AH BATTERY	SLA1079	PS-1290	NA	NA
PC12-12F2	12V 12AH BATTERY	SLA1104	PS-12120	UB12120	NP12-12-250
PC18-12NB	12V 18AH BATTERY	SLA1116	PS-12180	UB12180	NP18-12B
PC22-12NB	12V 22AH BATTERY	SLA1116	PS-12200	UB1222	NA
PC26-12NB	12V 26AH BATTERY	SLA1146	PS-12260	UB12260	NP24-12BR
PC33-12NB	12V 33AH BATTERY	SLA1155	PS-12330	UB12350	NA
PC40-12NB	12V 40AH BATTERY	SLA0134	PS-12400	UB12400	NA
PC55-12NB	12V 55AH BATTERY	SLA1165	PS-12550	UB22NF	NA
PC70-12NB	12V 70AH BATTERY	SLA1175	PS-12750	UB24	NA
PC100-12NB	12V 100AH BATTERY	SLA1185	PS-121000	UB27	NA

APPLICATIONS




Emergency Lighting



Smoke & CO2 Detectors



Fire Alarm Systems

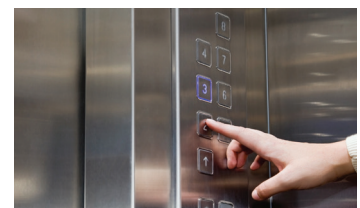

Elevators



Solar Traffic Directionals



Security Panels



Motorized Carts / Wheelchairs



Hospital Beds




Emergency Call Boxes



UPS/Data Protection




Access Controls

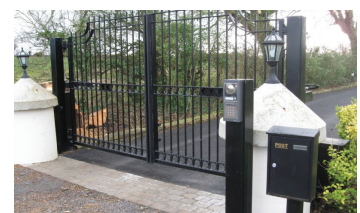

Gate Access



Power your World.

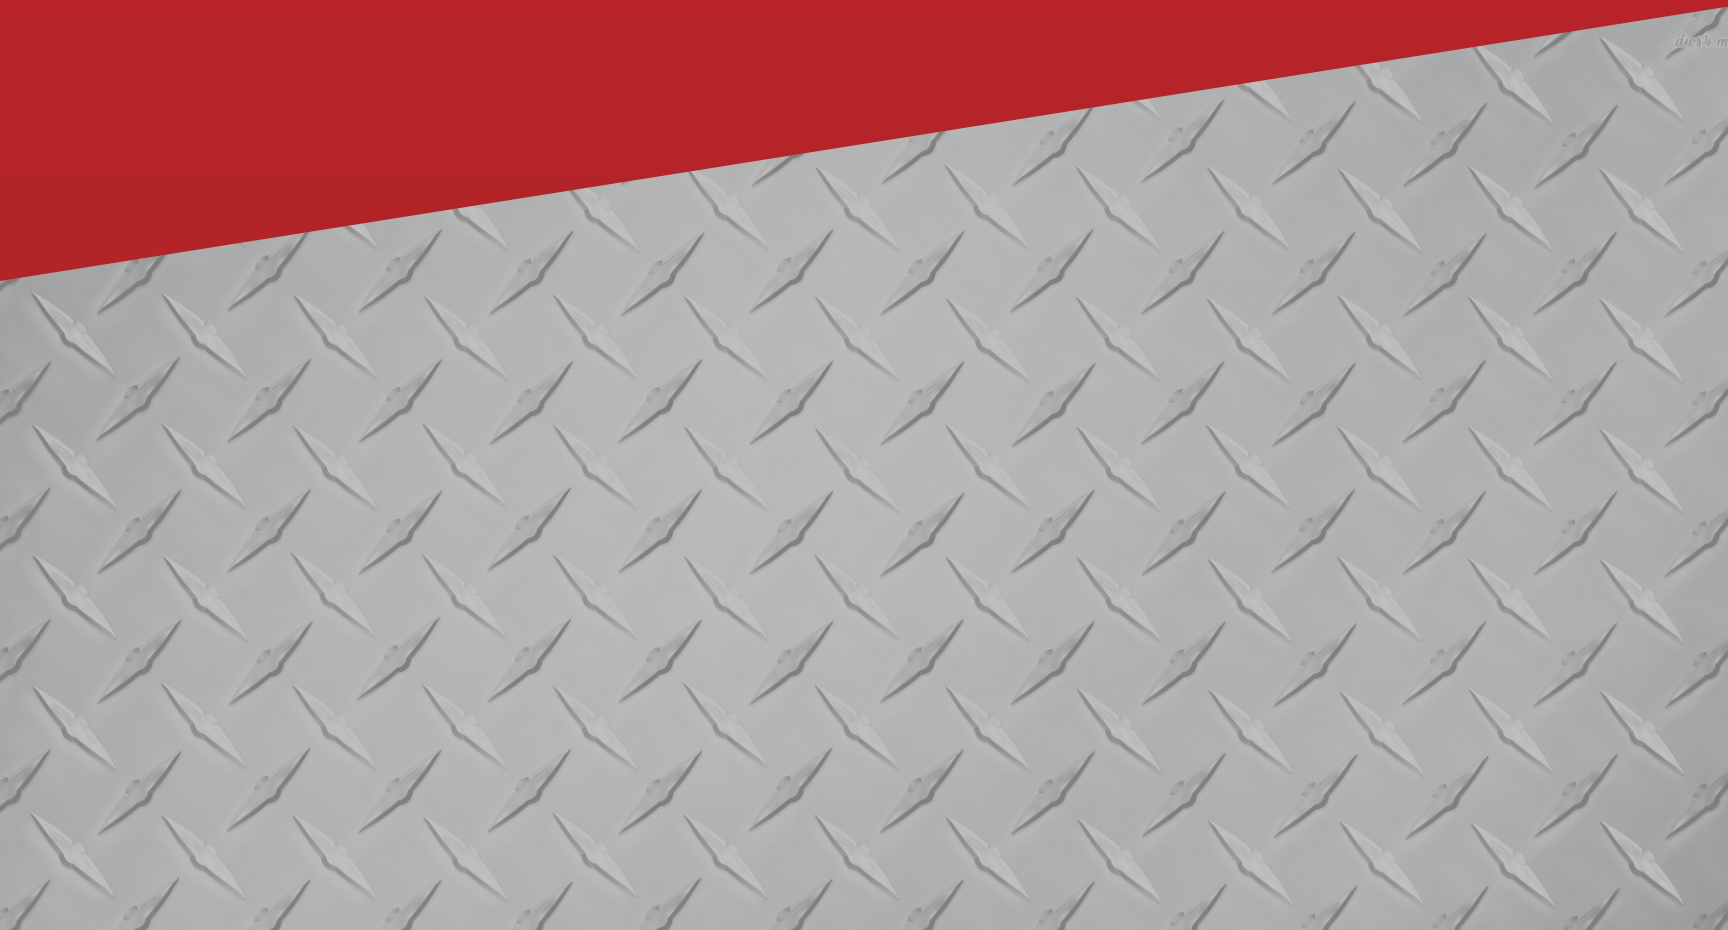



zeus[®]

Power-cell Battery Products, LLC

www.zeusbatteryproducts.com

Contact us:
877-469-4255

