



CUSTOMER MODIFIED PART

322A112-3-G01

a. Part as supplied

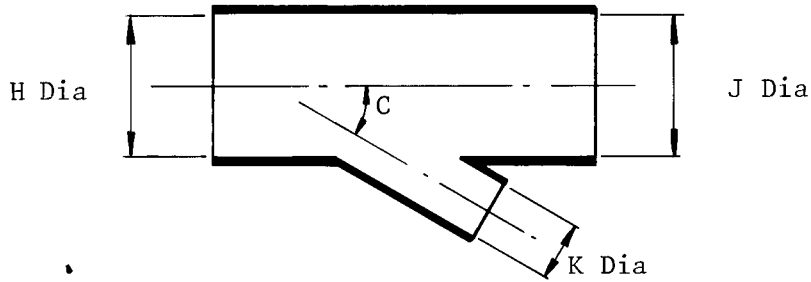

b. Part after unrestricted recovery

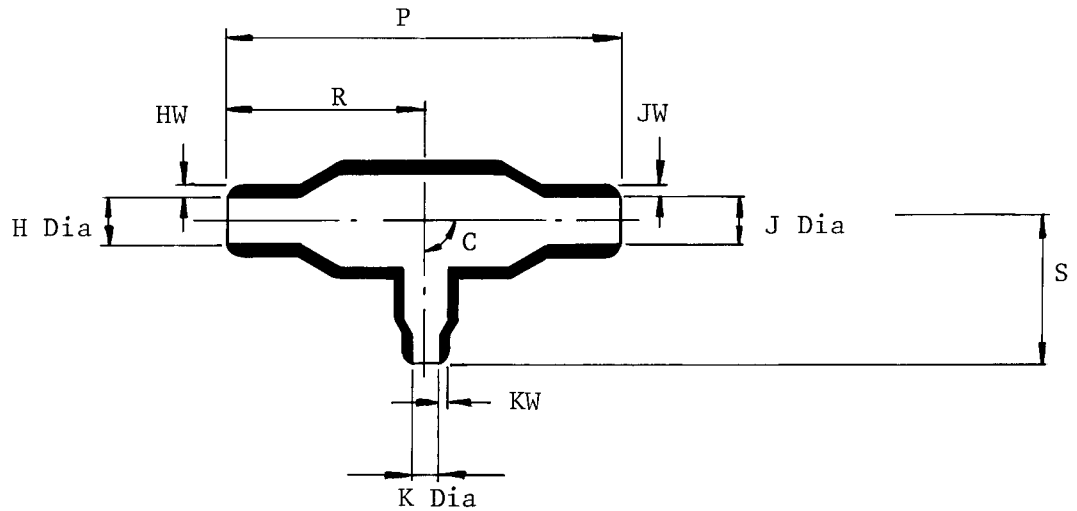

DIMENSIONS (IN MILLIMETRES)

| Part Number | H & J | | K | | P | R | S | HW | JW | KW | C | |
|-------------------|----------|----------|----------|----------|------------|------------|------------|------------|------------|------------|------------|------------|
| | Min a | Max b | Min a | Max b | +10% -b | +10% -b | +10% -b | +20% -b | +20% -b | +20% -b | +10° -a | + 5° -b |
| 322A112 -3-G01 | 18 | 5,8 | 8,0 | 3,0 | 52 | 26 | 19 | 1,5 | 1,5 | 1,0 | 20 | 90 |

Issued by

J. Hestert

Issue 1


Date MAY 1978

Approved by

S. D. Smyth
PROBANTS

Ordering Information

202A163-*G13/**-0

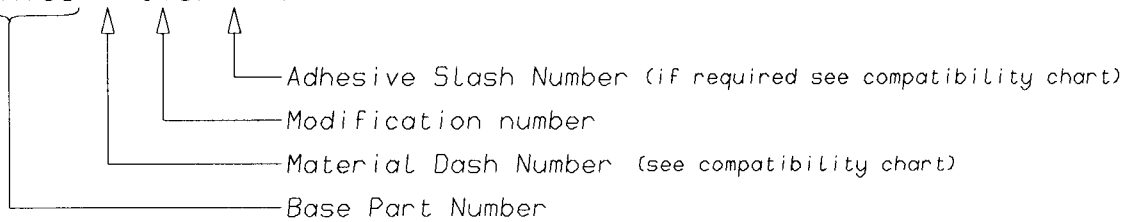

COMPATIBILITY CHART

| MATERIAL DASH NUMBER | MATERIAL DESCRIPTION | COATING SLASH NUMBER |
|----------------------|----------------------------|----------------------|
| -3 | POLYOLEFIN, SEMI-RIGID | /42 ,/86 |
| -4 | POLYOLEFIN, FLEXIBLE | /42 ,/86 |
| -25 | ELASTOMER, FLUID RESISTANT | /86,/225 |
| | | |
| | | |
| | | |

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923