

Datasheet

2.5" SATA SSD

3TE7 series

- 2.5" SATA Slim SATA III solution for industrial field
- High IOPS
- iSMART disk health monitoring
- iPower Guard for protecting unstable start up and shut down.
- iData Guard for abnormal power failure

Introduction

Innodisk 2.5" SATA SSD 3TE7 is SATA III 6.0 Gb/s flash based disk, which adopts latest SATA III NAND controller with Innodisk's exclusive L³ FW architecture. The upgraded L³ FW architecture, combining Innodisk signature 4K mapping algorithm L² FW architecture with powerful LDPC technology, makes 3TE7 series have outstanding high IOPS, better data integrity and extended lifespan through reducing the bad block number happening. Built-in thermal sensor, and iData Guard ensure data integrity and reliability of 2.5" SATA SSD 3TE7 for industrial applications.

2.5" SATA SSD 3TE7 series

Diagram

Contact us for more information about the 2.5" SATA SSD 3TE7


Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

Contact us for more information about the 2.5" SATA SSD 3TE7

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

* DES25-XXXDK1EXXXL(32GB~256GB)

* DES25-XXXDK1EXXXL(512GB)

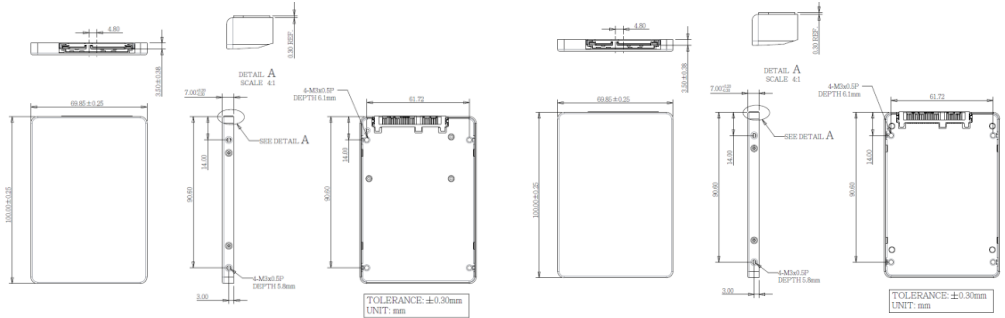

Specifications

Interface	SATA III
Flash Type	3D TLC
Capacity	32GB~2TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	550 / 520 MB/s
4KB Random (QD32) R/W (IOPS)*	82,000/72,000
Max. Power Consumption	3.6 W
Thermal Sensor	✓
External DRAM Buffer	-
H/W Write Protect	Optional
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	69.8 X 100.0 X 6.8 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Sequential performance based on CrystalDiskMark 5.1.2 with file size 1000MB	

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2017 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Ordering Information (Please refer to TPS for detail)

Operation Temp.	32GB	64GB	128GB	256GB	512GB	1TB	2TB
Standard Grade (0°C ~ +70°C)	DES25-32GDK1EC3SL	DES25-64GDK1*C3DL	DES25-A28DK1EC3QL DES25-A28DK1GC3DL	DES25-B56DK1*C3QL	DES25-C12DK1*C3QL	DES25-01TDK1*C1QL	DES25-02TDK1*CAQL
Industrial Grade (-40°C ~ +85°C)	DES25-32GDK1EW3SL	DES25-64GDK1*W3DL	DES25-A28DK1EW3QL DES25-A28DK1GW3DL	DES25-B56DK1*W3QL	DES25-C12DK1*W3QL	DES25-01TDK1*W1QL	DES25-02TDK1*WAQL

Operation Temp.	32GB	64GB	128GB	256GB	512GB	1TB	2TB
Standard Grade (0°C ~ +70°C) 112 layers 3D TLC	X	DES25-64GDK1KCCSL	DES25-A28DK1KCCDL	DES25-B56DK1KCCDL DES25-B56DK1KCCQL	DES25-C12DK1KCCQL	DES25-01TDK1KCCQL	DES25-02TDK1KCCQL

*. E: 64 layers 3D TLC; G: 96 layers 3D TLC

innodisk

www.innodisk.com