

REV. C
DCO 300783


TOLERANCES ±.010" - UNLESS OTHERWISE SPECIFIED

| | |
|-----------------|-------------------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 500 OHMS ±10% |
| NOMINAL VOLTAGE | 28 VDC |
| MUST OPERATE | 13.5 VDC MAX. |
| | TRANSIENT SUPPRESSION - 42 VDC MAX. |
| MUST RELEASE | 5.5 VDC MAX., 2.3 VDC MIN. |

| | |
|--------------|---------------------------|
| ENVIRONMENT: | |
| VIBRATION | 70 Hz TO 3000 Hz @ 30 g's |
| SHOCK | 200 g's 6 MS. DURATION |
| TEMPERATURE | -70 °C TO +125 °C |

| | |
|--------|-----------------------------------|
| NOTES: | OPERATE, RELEASE 5 MS MAX. |
| | CONTACT STABILIZATION 2.5 MS MAX. |
| | CONTACT BOUNCE 1 MS MAX. |
| | CONTACT BREAK BOUNCE 0.1 MS MAX. |

CUSTOMER DATA SHEET

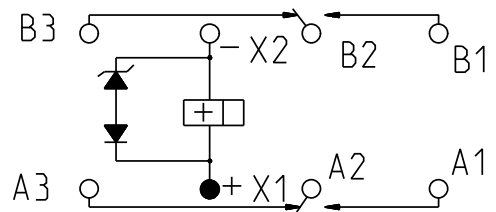

TERMINAL VIEW

| | |
|-----------------|---|
| CONTACT RATING: | LOW LEVEL |
| | TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE, |
| | 100,000 OPERATIONS |

DR. B.D. 11MAR2008 CK. J.M.B. 3/17/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. M83536/2-027M
CUST. NO. REV.

TE NUMBER
5-1617758-3

CII PART NUMBER
FCB-205-0227M