

1

2





3

4

5

6

7

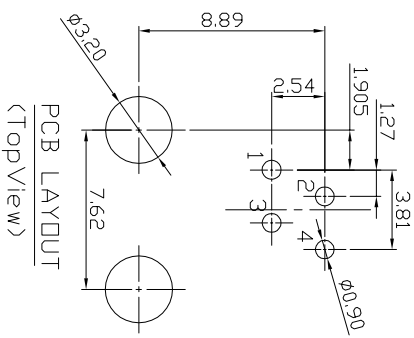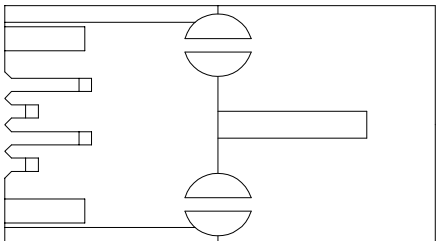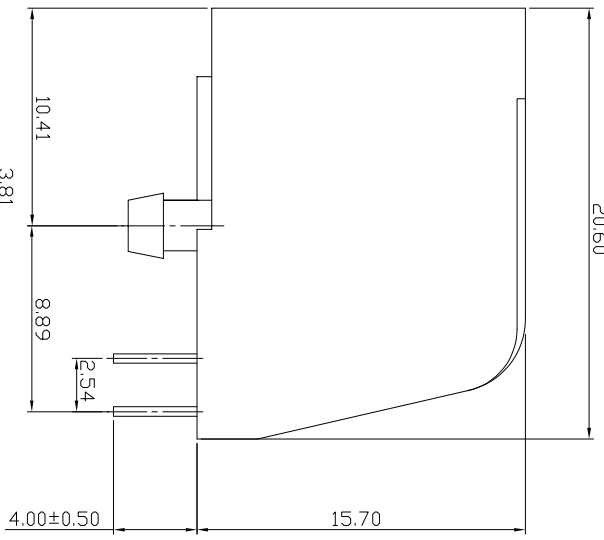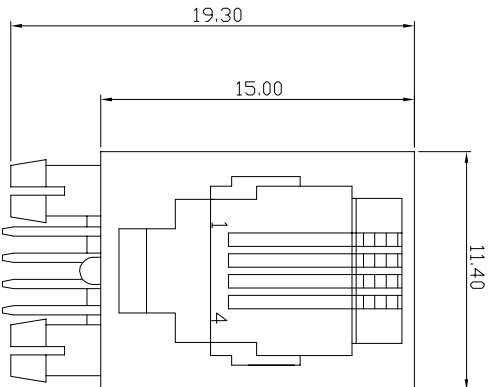

RoHS compliant
Unit:mm

- Specification:
- Electrical Char
Insulation Resistance: 500MΩ min. 500V DC
for 1 minute
Contact Resistance: 30mΩ max.
Rating Current: 1.5A max.
Rating Voltage: 150V AC
Dielectric Voltage: 1000 Vrms at 1MA 60 sec. min.
 - Physical Char
Housing: PBT Glass filled (UL 94V-0) Color: Black
Soldering Temperature: 235°C for 5 sec.
Spring Wire: 0.35mm Dia Phosphor Bronze
6u" Gold plating over Nickel
Temperature Range: -40°C to +85°C
Durability: 750 mating cycles min.
 - Packing: Tray

Scale	Free
TOLERANCE	
.XX	±0.20
.XXX	±0.13
.XXXX	±0.05
DIM	TOL
Angle	+0°30'

Id.	Modification	Date	Name
①	Drawn	04.08.2016	Winnie

Date	Name
04.08.2016	Winnie
04.08.2016	Winnie

Customer-No.	Drawing-No.	Replace
	ASSMANN WSW-No. A-2004-3-4-N-R	ASS 7325 CO
		rev00



1

2

3

4

5

6

7

A
B
C
D
E
F
G
H