


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	AF	DRAWING CLARIFICATION	17NOV2016	SV PKS



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- △ SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRES OF THE SAME TYPE AND SIZE, COPPER RANGE IS 0.25-0.36mm [#30-#27] AWG. ALUMINUM RANGE IS 0.32-0.45mm [#28-#25] AWG. ALUMINUM WIRE RANGE APPLIES FOR POST-TIN PLATED VERSIONS ONLY.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

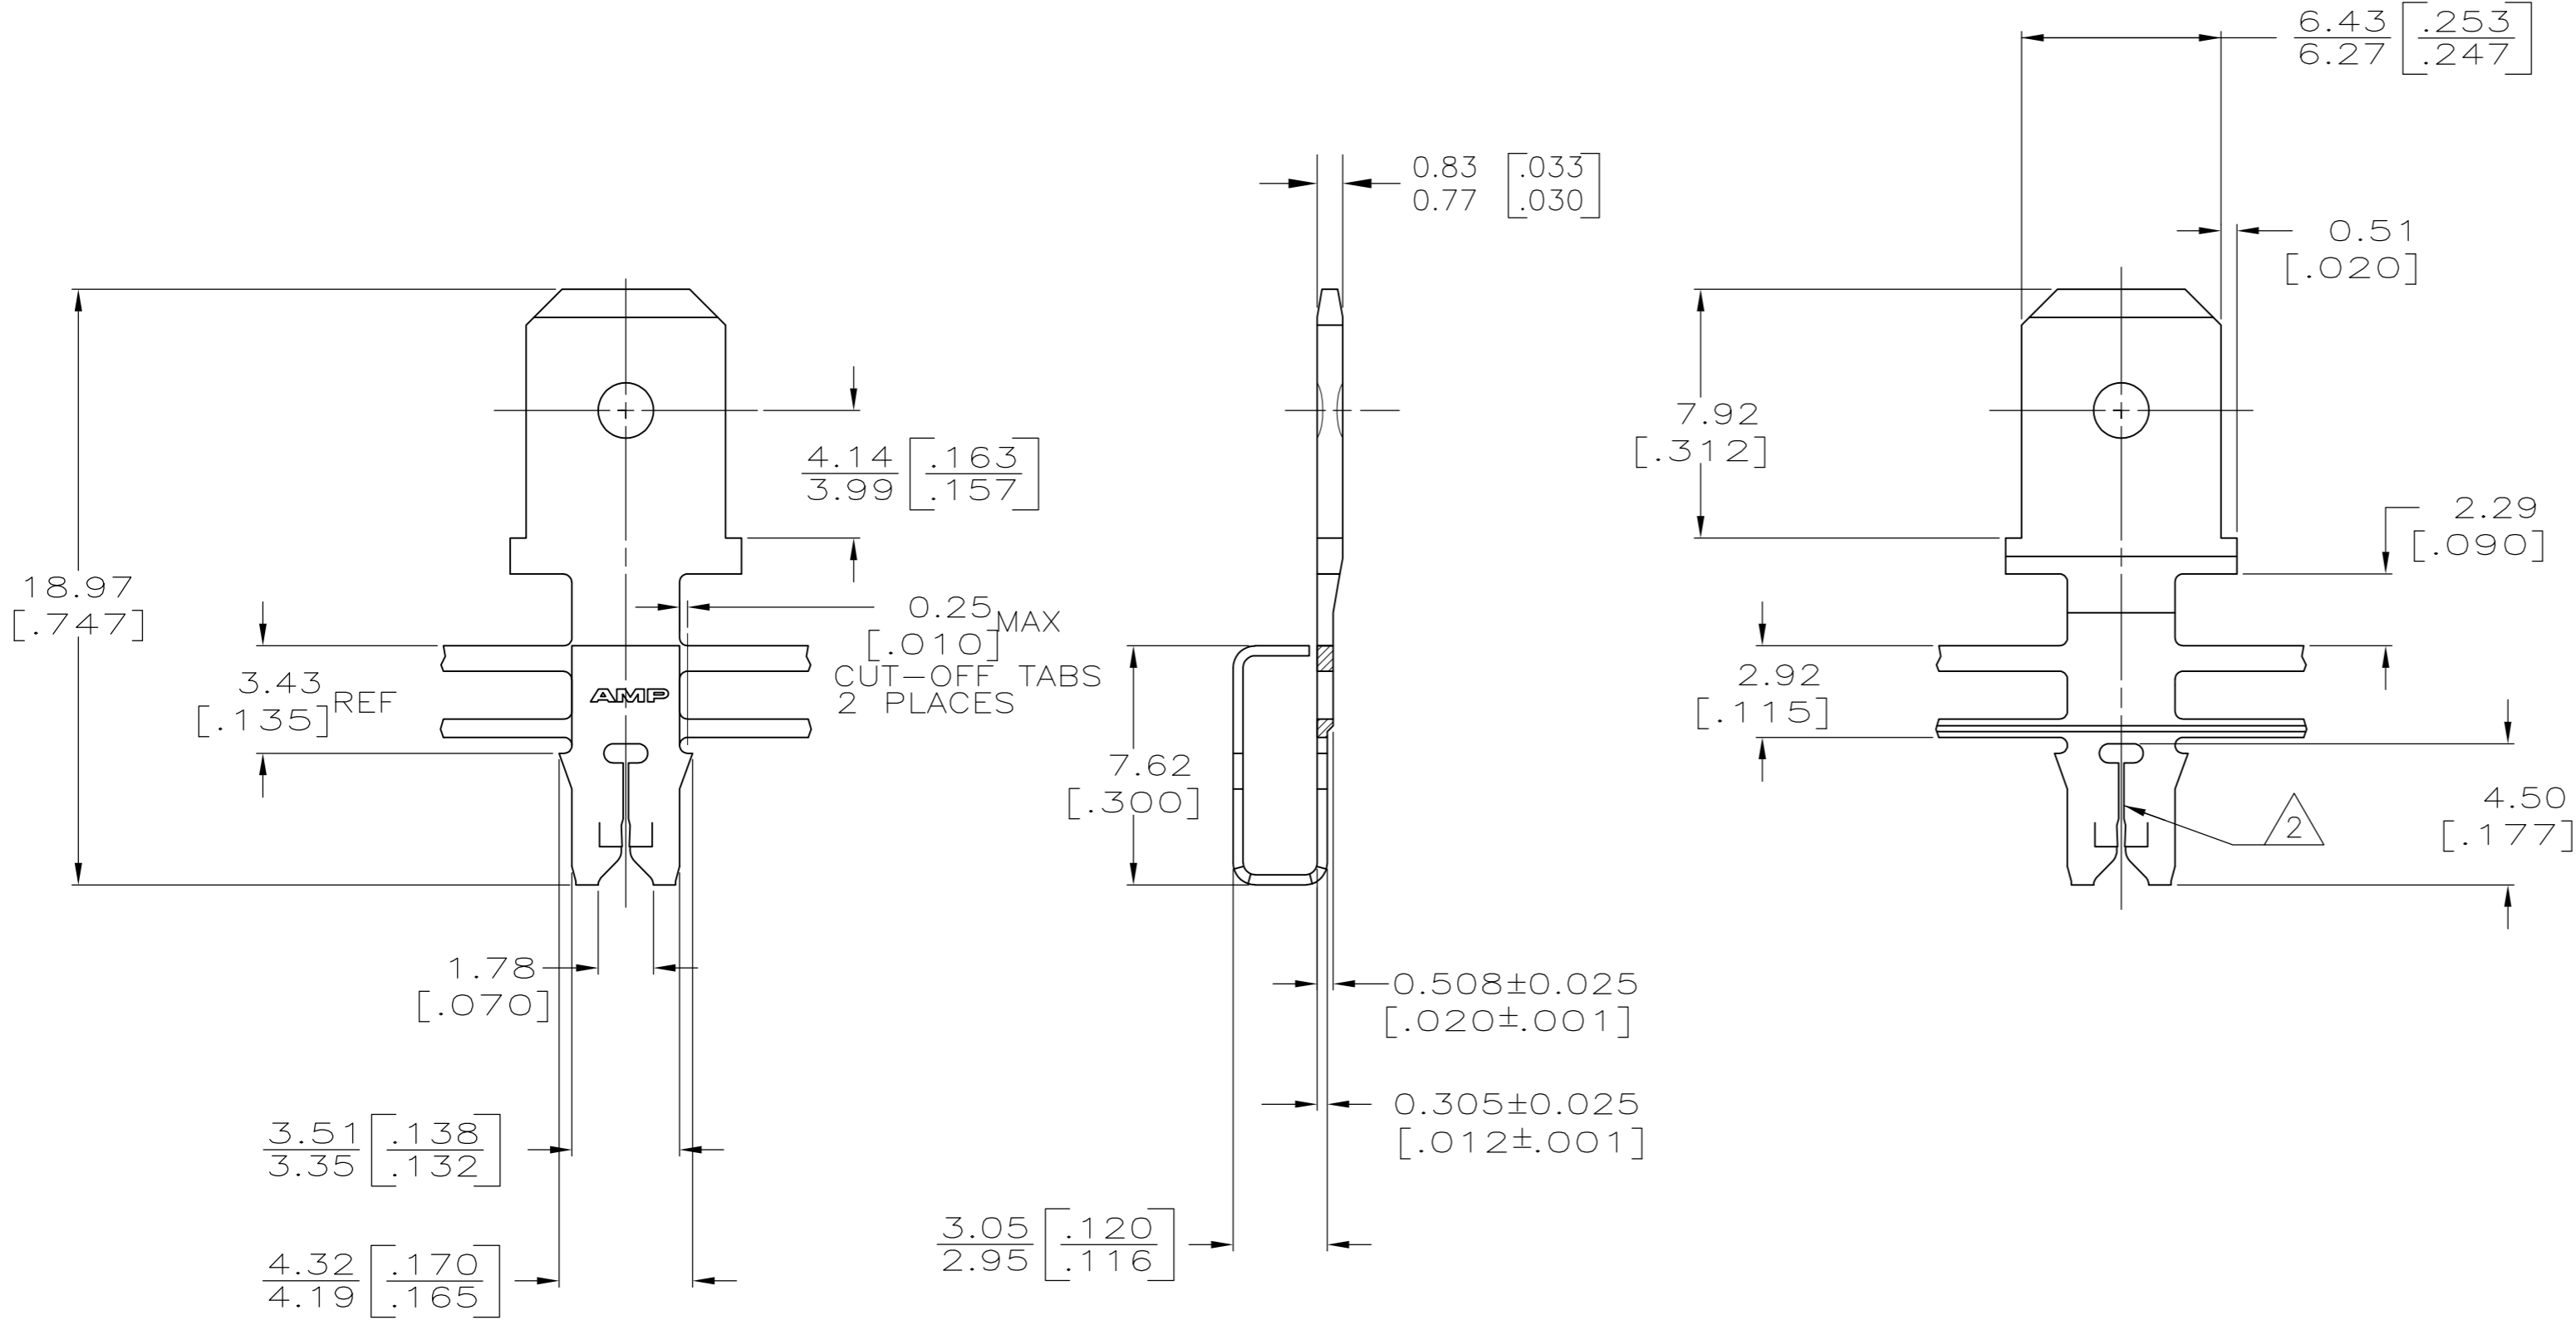

62651-1
PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12/12/90 MICHAEL S. FEHER	TE TE Connectivity	
DIMENSIONS: mm(INCHES)		CHK 12/20/90 JEFF R. RUTH		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 12/20/90 NELSON E. NEFF	NAME TAB, 6.35 [.250] FASTON™ MAG-MATE™	
0 PLC ± -		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC	A2 00779 C=62651	
2 PLC ± 0.25 [.010]		114-2046	SCALE 5:1 SHEET 1 OF 1 REV AF	
3 PLC ± -		WEIGHT 0		
4 PLC ± -		CUSTOMER DRAWING		
ANGLES ± -				
FINISH TIN PLATE				