

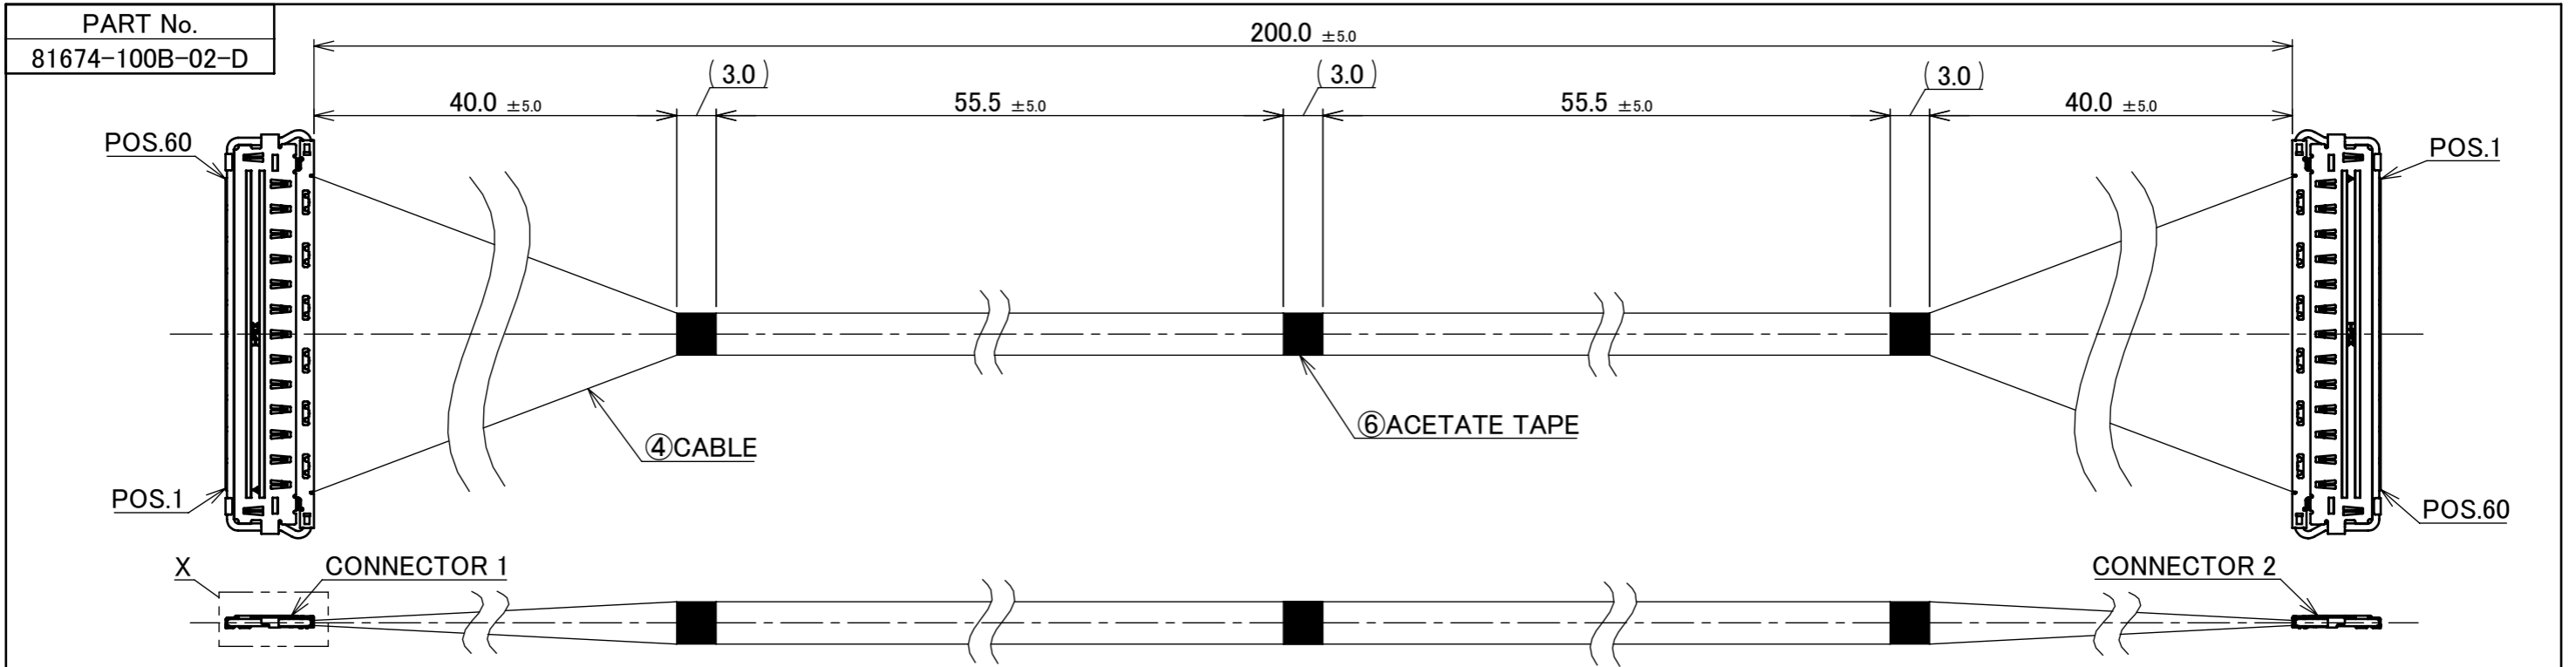
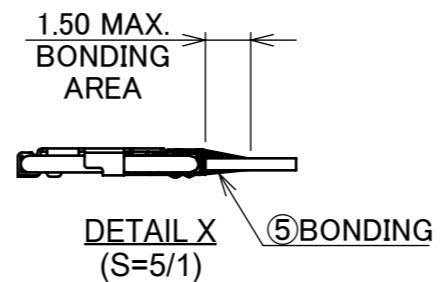
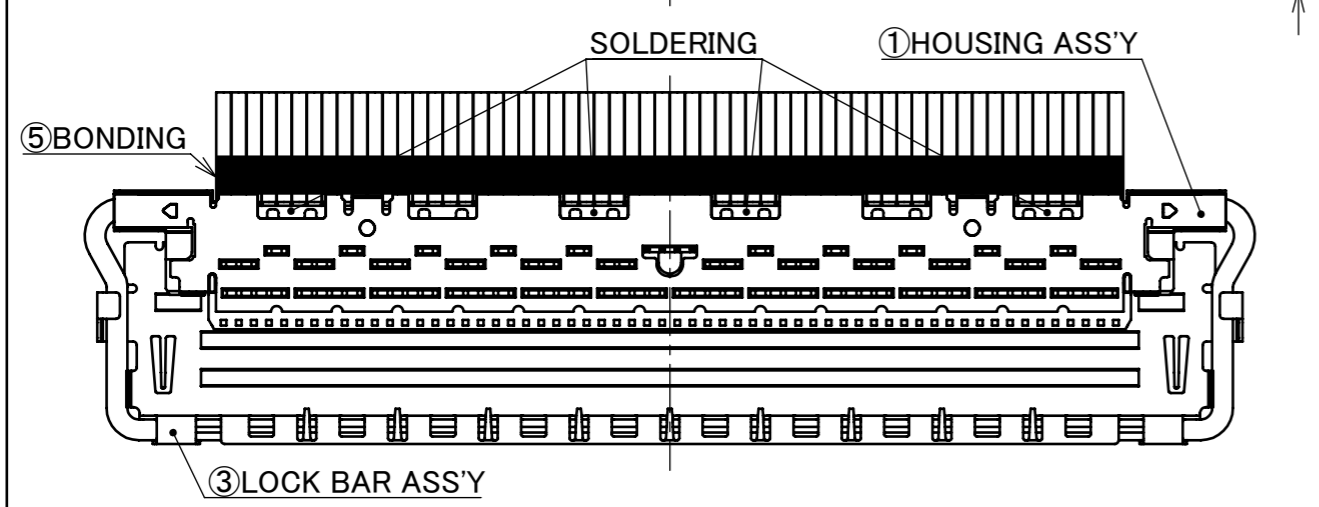


PART No.
81674-100B-02-D

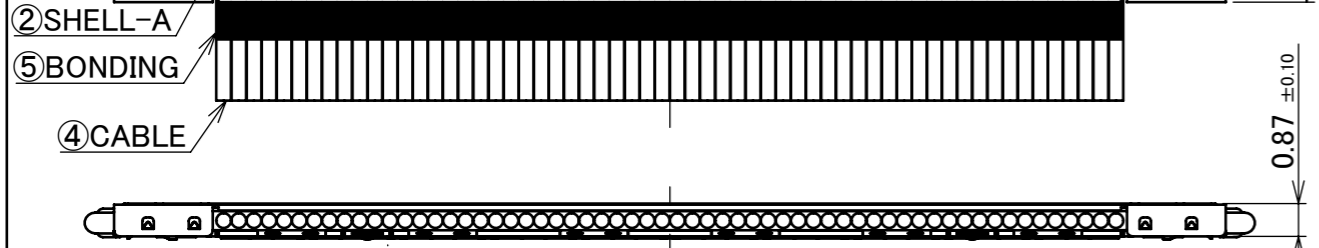

CONNECTOR 1&2
(S=5/1)

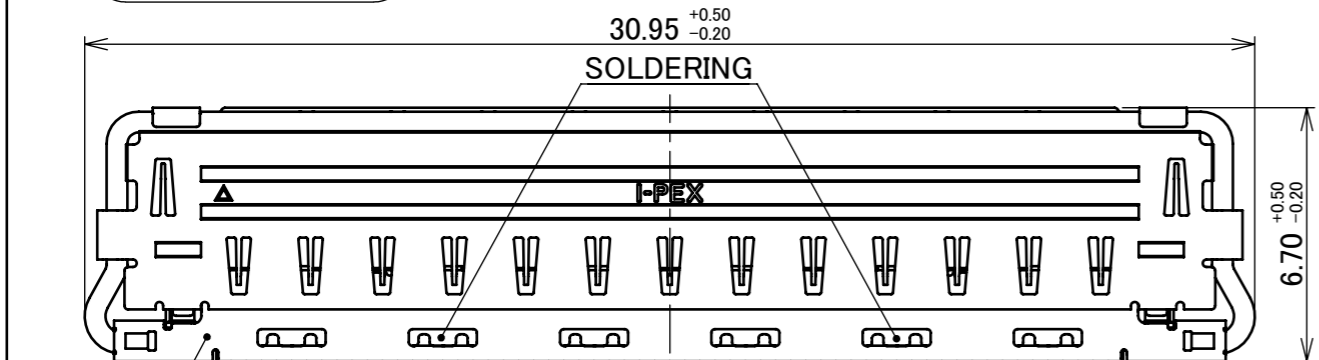

| PIN ASSIGNMENT | | |
|----------------|------------------------------------|-------------|
| CONNECTOR 1 | CABLE | CONNECTOR 2 |
| 60 | MICRO-COAXIAL AWG #40 50 OHM, BLUE | 1 |
| 59 | MICRO-COAXIAL AWG #40 50 OHM, BLUE | 2 |
| . | MICRO-COAXIAL AWG #40 50 OHM, BLUE | . |
| 2 | MICRO-COAXIAL AWG #40 50 OHM, BLUE | 59 |
| 1 | MICRO-COAXIAL AWG #40 50 OHM, BLUE | 60 |

NOTE.
1. TO HANDLE THIS CONNECTOR YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW. I-PEX INSTRUCTION MANUAL No.HIM-16028.
2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 250V LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V

| NO. | DESCRIPTION | PARTS NO. | QTY | REMARK |
|-----|----------------|---------------|-----|--|
| 6 | ACETATE TAPE | - | 3 | BLACK |
| 5 | BONDING | - | - | UV GLUE |
| 4 | CABLE | - | 60 | MICRO-COAXIAL AWG #40 50 OHM, BLUE |
| 3 | LOCK BAR ASS'Y | 20789-060T-01 | 2 | CONNECTOR 1 & 2 CABLIN-CA II PLUS PLUG P/N : 20788-060T-01 CONNECTOR TO BE MATED : 20790-060E-02 |
| 2 | SHELL-A | 3204-0601 | 2 | |
| 1 | HOUSING ASS'Y | 20680-060T-01 | 2 | |

| For DIGI-KEY CORPORATION | | | | | | | | | | |
|--------------------------|---------|-----|-------------|--------------------|---------|------------------|----------|-------------------------------|------------|---------------|
| | | | | ANGLE | ±2° | 6 OVER 30 MAX. | ±0.3 | PROJECTION | SERIES No. | CUSTOMER COPY |
| | | | | 6 MAX. | ±0.2 | 30 OVER 120 MAX. | ±0.5 | | IH-210016 | |
| | | | | GENERAL TOLERANCE. | | | | TITLE | | SCALE |
| | | | | | | | | CABLIN-CA II PLUS 60P HARNESS | | |
| | | | | DWG. | K.Baba | | DATE | 2022/03/11 | | UNIT |
| | | | | CHK. | R.Takei | | | | mm | |
| 0 | Z220282 | K.B | Mar./11/'22 | APP. | H.Ikari | | DWG. No. | | SIZE | |
| REVISION RECORD | | | | | | 81674 | | SHEET | | REV. |
| | | | | | | | | A3 | | 1/1 |
| | | | | | | | | | | 0 |

Confidential B

I-PEX Inc.

QKE-DFE06-02 REV.12