


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1200980213	MP3G72PP4M010	1.0M +55.6mm -0 [3.28' +2.19" -0]
1200980214	MP3G72PP4M050	5.0M +165.1mm -0 [16.40' +6.50" -0]

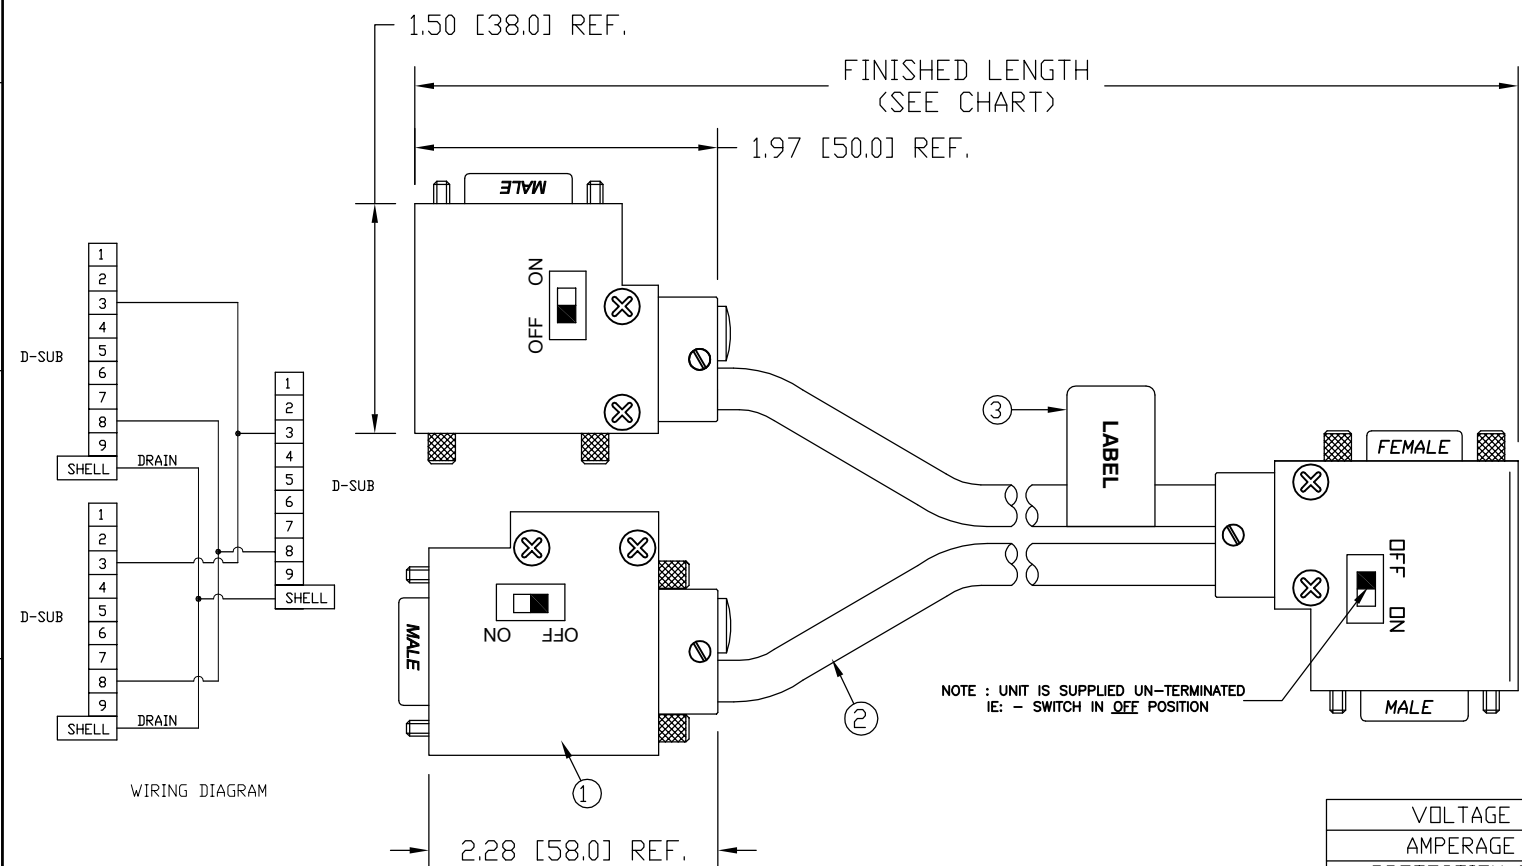

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE - D-SUB	0°C TO 60°C

ITEM	COMPONENT	MATERIAL	FINISH
1	D-SUB	ABS	BLACK
2	CABLE- 22 AWG, COPPER STRANDING TWISTED PAIR, SHIELD WITH BRAID	PUR	PURPLE
3	LABEL	MLYAR	BLACK/YELLOW

RELEASED DRAWING  
 EC NO: WEL2010-0081  
 DRWN: LHARTMAN 8/27/09  
 CHKD: BWOODMAN09/08/27  
 APPR: JFMURPHY 2009/08/28

QUALITY SYMBOLS  
 ▽=0  
 ▽/ =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±---	±.01
1 PLACE	±0.3	±---

ANGULAR ±---°

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE IN/MM

SCALE NTS

DESIGN UNITS INCH

THIRD ANGLE PROJECTION

DRAWN BY DATE  
 LHARTMAN 2009/08/27

CHECKED BY DATE  
 BWOODMAN 2009/08/27

APPROVED BY DATE  
 JFMURPHY 2009/08/27

MATERIAL NO.

SIZE A

TITLE  
 D-SUB PROFIBUS VERTICAL TO D-SUB VERT/HORZ #22/2 SHLD PURPLE PUR

MOLEX INCORPORATED

DOCUMENT NO. SD-120098-024

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION