
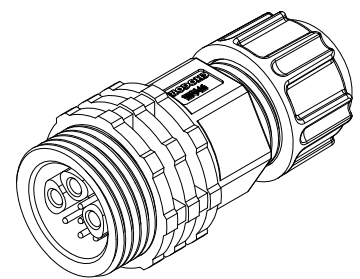
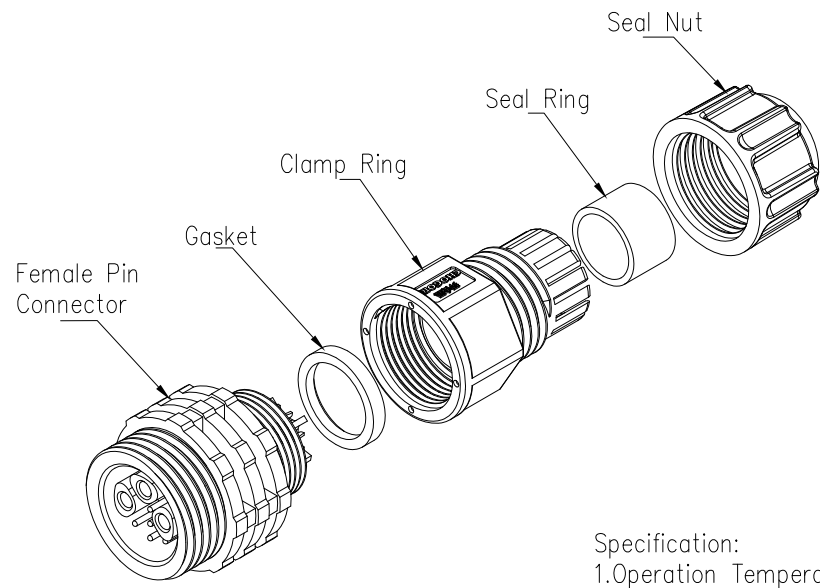

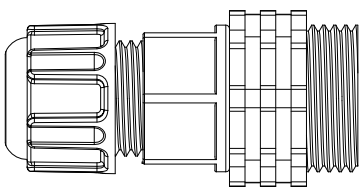



REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Hary	2020/05/21

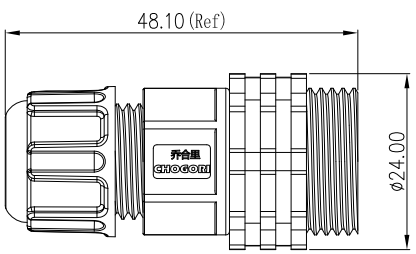

- Specification:
- 1.Operation Temperature: -45°C~105°C.
  - 2.Insulation Resistance: 100MΩ at DC500V.
  - 3.Contact Resistance: <10mΩ.
  - 4.Withstand Voltage: 1500V AC
  - 5.Operating Current: 15A/2A
  - 6.Operating Voltage: AC 125V/30V
  - 7.Waterproof Rate: IP67 (Mated)
  - 8.Seal Nut: Nylon, Black
  - 9.Seal Ring: Silicon, Black.
  - 10.Clamp Ring: Nylon, Black
  - 11.Gasket: Silicon, Red
  - 12.Female Pin: Copper Alloy, Gold Plated
  - 13.Connector: Nylon+GF, Black
  - 14.RoHS Compliant.
  - 15.UL Compliant.
  - 16.Mating Cap: 806-00052-00

23XXX411-XX Cable Range OD  
 01 OD: φ3.5mm~φ6.5mm  
 02 OD: φ6.5mm~φ9.5mm

Pin Number



(3+5) Pin

P/N: 23305411-XX

Pin Assignments  
Front View

UNIT: mm	
TOLERANCE	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGLES	±1°

DESCRIPTION	
Middle Series Screw Female Plug With Female Pin	
SCALE: 1:1	SHEET 1 OF 1
REV. C1	SIZE A4 * : Inspection Item



PART NO	23305411-XX	DRAWN BY	Hary	DATE	2020/05/21
DWG NO		CHECKED BY	Mo	DATE	2020/05/21
CUSTOMER		APPROVED BY	Panson	DATE	2020/05/21

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.