
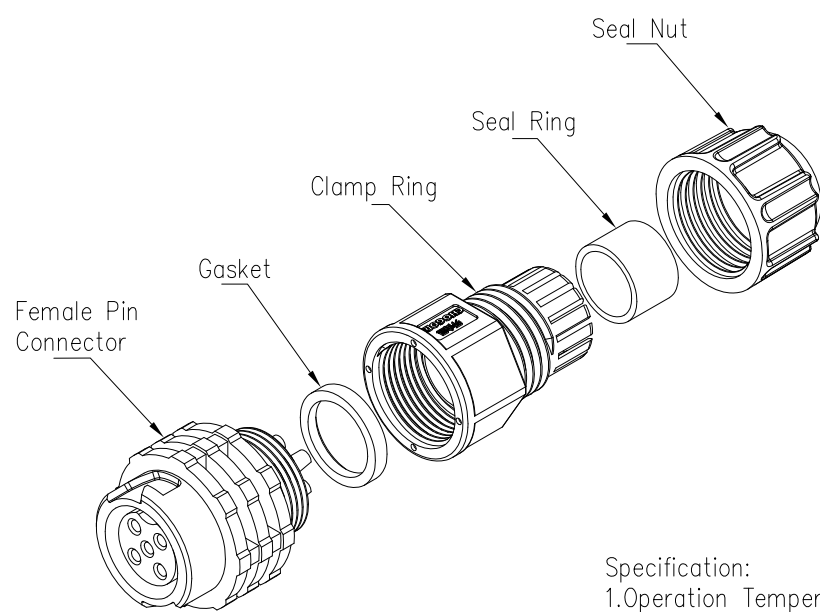

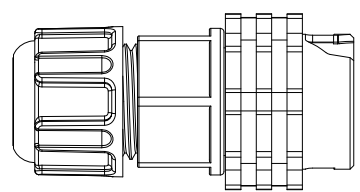


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Hary	2020/05/14

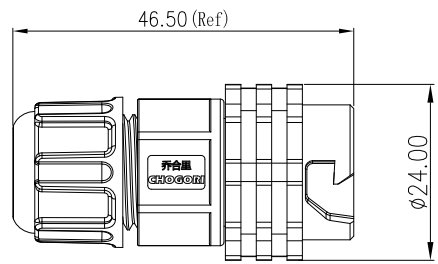

23XXX431-XX Cable Range OD
 01 OD: φ3.5mm~φ6.5mm
 02 OD: φ6.5mm~φ9.5mm

Pin Number

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC500V.
 - 3.Contact Resistance:<10mΩ.
 - 4.Withstand Voltage: 2000V AC
 - 5.Operating Current:15A
 - 6.Operating Voltage: AC 300V
 - 7.Waterproof Rate:IP67 (Mated)
 - 8.Seal Nut:Nylon, Black
 - 9.Seal Ring:Silicon, Black.
 - 10.Clamp Ring:Nylon, Black
 - 11.Gasket:Silicon, Red
 - 12.Female Pin:Copper Alloy, Gold Plated
 - 13.Connector:Nylon+GF, Black
 - 14.RoHS Compliant.
 - 15.UL Compliant.
 - 16.Mating Cap: 806-00076-00



5 Pin	6 Pin
P/N: 23005431-XX	P/N: 23006431-XX
Pin Assignments Front View	

UNIT:mm		DESCRIPTION	PART NO	DRAWN BY	DATE
TOLERANCE		Middle Series Push Lock	23XXX431-XX	Hary	2020/05/14
.X ±0.25		Female Plug With Female Pin	DWG NO	Mo	2020/05/14
.XX ±0.15	SCALE: 1:1		CUSTOMER	APPROVED BY	DATE
.XXX ±0.05	SHEET 1 OF 1			Panson	2020/05/14
ANGLES ±1°	REV. C1	SIZE A4			
		* :Inspection Item			

