


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION		DATE	APPROVED
REV	DESCRIPTION		
A	INITIAL RELEASE, RFS. 25810, MS	02/09/15	HM

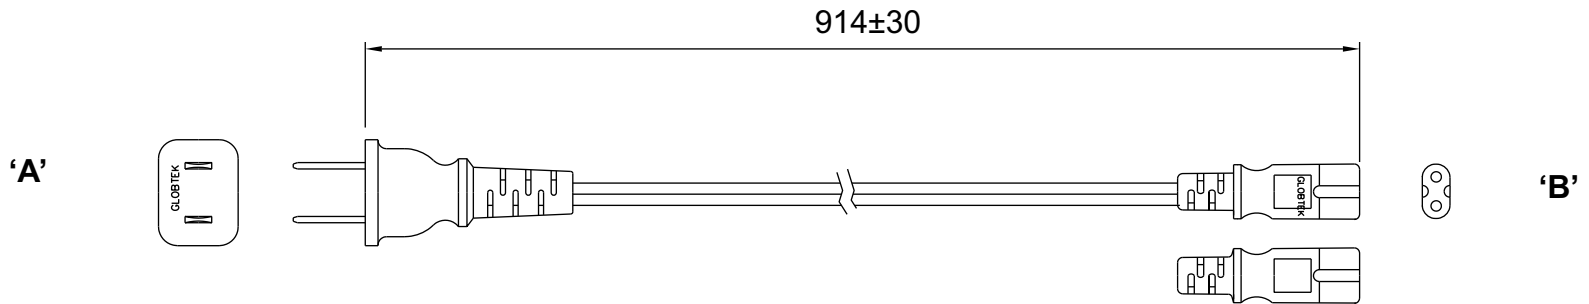


GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC
 CABLE TYPE / SIZE: SPT-2, 18 AWG X 2, VW-1, FT2
 TEMPERATURE RATING: 60° C
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 914±30 mm
 CABLE OUTER DIAMETER: 3.4 x 6.9 ± 0.2 mm
 END 'A' TERMINATION: NEMA 1-15 (NON-POLARIZED)
 END 'B' TERMINATION: IEC 320 /C7
 APPROVALS PLUG: UL, CSA or cUL
 APPROVALS CABLE: UL, CSA or cUL
 APPROVALS CONNECTOR: UL, CSA or cUL

PACKING:

HANKED
 L = 125±25 mm

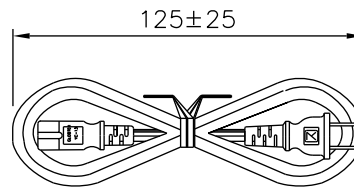

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



RELEASED

By N.Frost at 10:37 am, Feb 11, 2015

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: MS	DATE: 02/09/15	DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET		
DRAWN: NF	DATE: 02/09/15	FSCN No.: G, CC	SIZE A	MODEL: N / A
APRVD: HM	DATE: 02/09/15	SCALE: NONE	PART NO: 451113F703A(R)	
				REV. A
				SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice