



CIRCUIT: DPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	DIFF	DN
2-3,5-6	DPEN	2-1,5-4

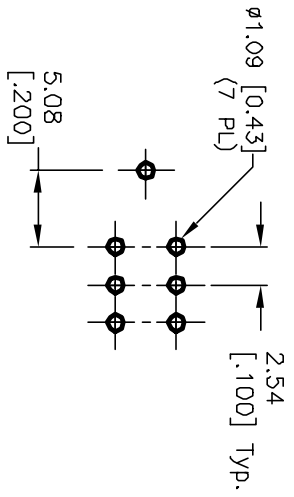

RECOMMENDED P.C.B. LAYOUT

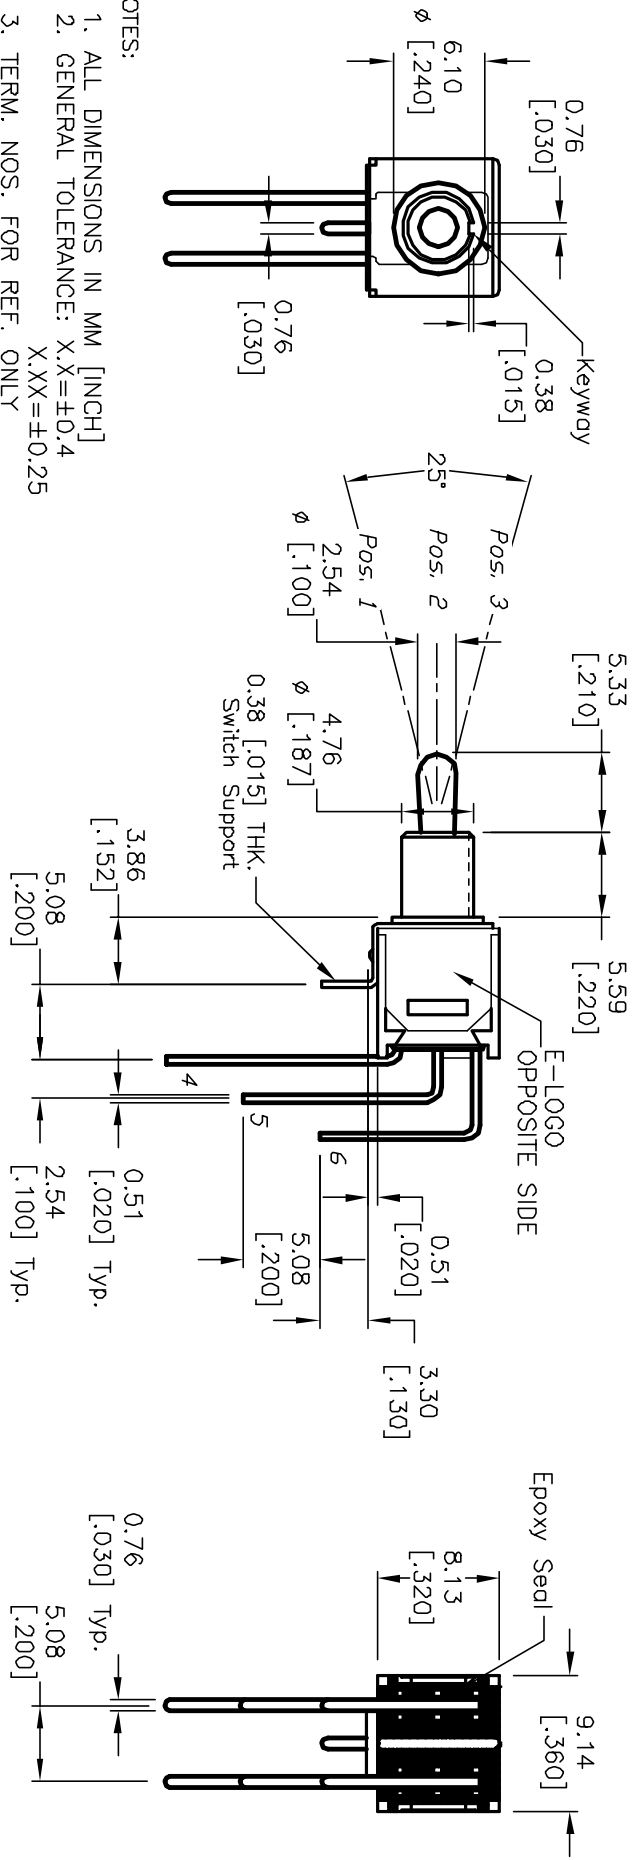

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4V @20V AC or DC
5. FIXED TERM. MOVING CONTACT:
Copper Alloy w/GOLD plating over Nickel plate.
6. ELECTRICAL LIFE: 30,000 make-and-break cycle at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C

A		12141	RELEASED FOR PRODUCTION	5/10/02	CJB	TITLE		200 MDP-3 T2 B4 M7 R E (GOLD CONTACTS)
REV.	ECN NO.	DESCRIPTION		DATE	CHK'D	SCALE	DATE	DR
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PREPARATORY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED				2:1	5/10/02	CJB
								DWG
								T2222002
								REV
								A

