

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39014051	MiniFit Jr Rcpt SR V-0 5Ckt	1	PC
B	39000089	MiniFit Term Crp Fem Chn Bs 30Au 16awg	5	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A5	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

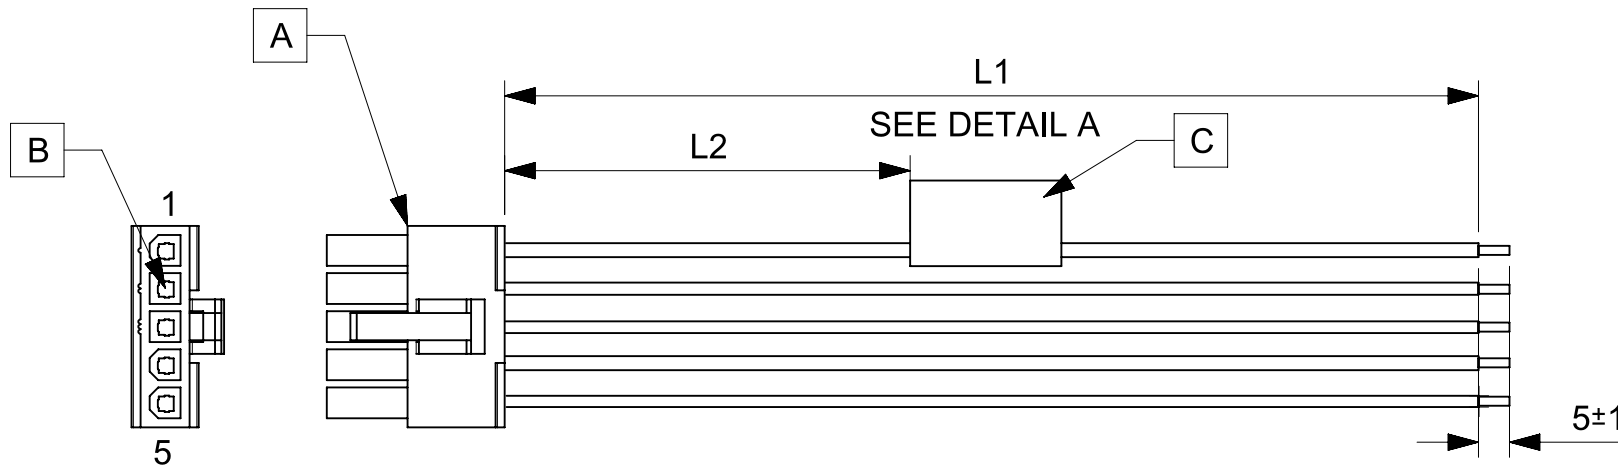


TABLE			
PART NUMBER	L1	L2	TITLE
2153212051	150±8	63 REF	MINIFIT JR SR R-S 5 CIRCUIT 150MM Au
2153212052	300±10	138 REF	MINIFIT JR SR R-S 5 CIRCUIT 300MM Au
2153212053	600±10	288 REF	MINIFIT JR SR R-S 5 CIRCUIT 600MM Au

- NOTES**
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/23	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:					
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)					
	4 PLACES	±	ANGULAR TOL ± °					
	3 PLACES	±	EC NO: 638380					
2 PLACES	±	DRWN: AS20		2020/04/02				
1 PLACE	±	CHK'D: RDESAI01		2020/05/28				
0 PLACES	±	APPR: RDESAI01		2020/05/28				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
			A4-SIZE	215321	2153212051	PSD	000	A